

## Y/C/Jungle IC for PAL/NTSC


### Description

The CXA1213AS is a Y/chroma/jungle signal processing IC of PAL, NTSC (4.43MHz, 3.58MHz) systems color TVs.

### Features

- TV system is compatible with PAL, SECAM, and NTSC (4.43MHz, 3.58MHz) through combination with the CXA1214P.
- No adjustment of H, V oscillation frequency by count down system.
- Built-in 50/60Hz automatic discrimination circuit and compulsory mode applicable.
- Built-in 3.58/4.43MHz color sub carrier oscillation frequency automatic discrimination circuit and compulsory mode applicable.
- Input prohibition gate function according to frequency of input vertical synchronization. (Noise elimination ability)
- Black expansion function. (New dynamic picture)
- High speed blanking function which blanks interval of characters.

48pin SDIP (Plastic)

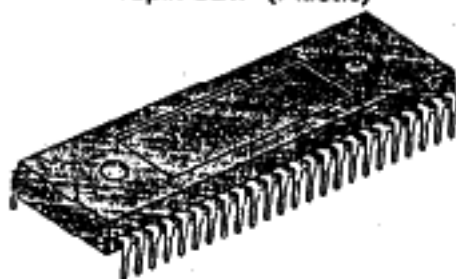

- Built-in SHP circuit and OFF applicable.
- Auto white balance IC CXA1024S compatible.


### Applications

Color decoder for PAL/NTSC system

### Structure

Bipolar silicon monolithic IC

### Block Diagram

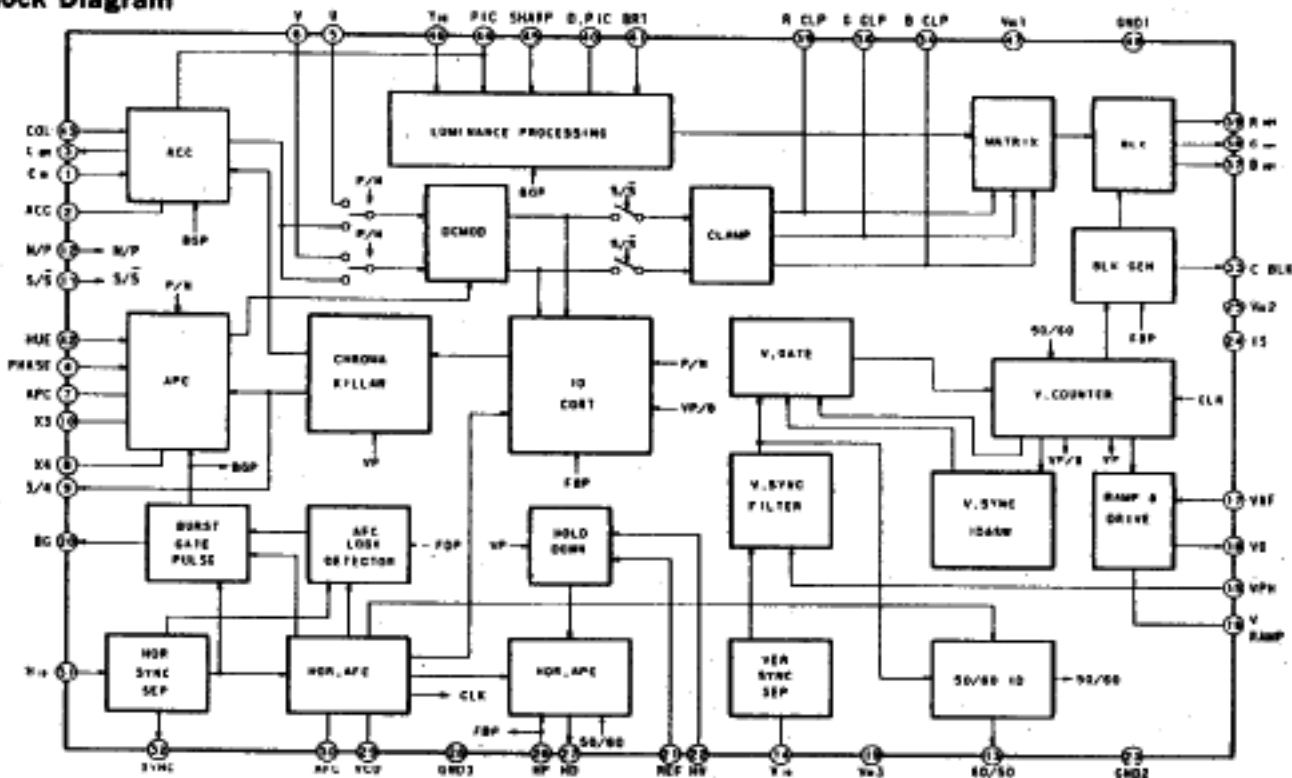

No.	Symbol	Voltage	Equivalent circuit	Description
41	BRT	—		Bright control voltage input pin. It is applicable for interface to auto white balance IC when BRT pin is to be $V_{CC}$ .
42	HUE	4.5V		HUE control voltage input pin for NTSC.
43	COL	—		Color control voltage input pin.
44	PIC	—		Picture control voltage input pin.
45	SHARP	3.2V		Sharpness control voltage input pin. The sharpness circuit in IC dose not go through when this pin is connected to $V_{CC}$ .

No.	Symbol	Voltage	Equivalent circuit	Description
46	$V_{IN}$	6.4V		Y signal input pin. 1Vp-p input.(Typ.)
47	$V_{CC1}$			$V_{CC}$ pin (Y/C system)
48	GND1	0V		GND pin (Y/C system)

(Ta = 25°C Vcc = 9V See Electrical Characteristics Test Circuit)

## Electrical Characteristics

No	Item	Symbol	SW conditions										Bias conditions (V)	Input C conditions	Test point	Details of measurement	Min.	Typ.	Max.	Unit						
			2	3	4	5	6	7	8	101	102	E1									E2	E3	E4	E5		
1	Current consumption	$I_{V_{CC1}}$	a	a	a	a	a	a	a						20	9	5	3	0	SIG1	A1	Test current consumption at A1	24	39	57	mA
2	BRT Center black level DC (B)	$V_{BAC}$	a	a	a	a	a	a	a		ON											Pin 37 waveform	1.6	1.8	2.0	V
3	BRT MAX black level DC (B)	$V_{BEMAX}$	a	b	c																	Pin 37 waveform	3.4	3.6	3.8	V
4	BRT MIN black level DC (B)	$V_{BEMIN}$	a	b	c																	Pin 37 waveform	0	0.45	0.75	V
5	PIC Center (B)	$V_{APC}$	a	a	a	a	a	a	a													Input SIG3 to Input A. Test DC value at Pin 37 on 3 SW conditions. The formula $V_x - V_{BAC}$ is applied for the Specifications $V_{APC}$ , $V_{APC MAX}$ and $V_{APC MIN}$ .	1.8	21	2.3	V
6	PIC MAX (B)	$V_{APC MAX}$	a	b	c																	Pin 37 waveform	2.55	2.85	3.1	V
7	PIC MIN (B)	$V_{APC MIN}$	a	b	c																	Pin 37 waveform	0.25	0.5	0.75	V
8	COLOR CONTROL Center	$V_{CCBO}$	a	a	a	a	a	a	a		ON											Input SIG4 to Input B. Test DC value at Pin 37 on 3SW conditions. The formula $V_x - V_{BAC}$ is applied for the specifications $V_{CCBO}$ , $V_{CCBO MAX}$ and $V_{CCBO MIN}$ .	0.6	0.9	1.2	V
9	MAX	$V_{CXBO}$	a	b	c																	Pin 37 waveform	1.4	2.0	2.6	V
10	MIN	$V_{CXBO}$	a	b	c																	Pin 37 waveform	0	20	100	mV

No	Item	Symbol	Bias conditions (V)												Input C conditions	Test point	Details of measurement	Min.	Typ	Max.	Unit					
			2	3	4	5	6	7	8	101	102	E1	E2	E3								E4	E5			
11	Detection axis at PAL (B axis)	$\phi_{BP}$			a															-10	4	17				
12	Detection axis at PAL (R axis)	$\phi_{RP}$																								
13	Detection axis at PAL (G axis)	$\phi_{GP}$																								
14	Gain ratio (R/B)	(R/B)P																								
15	Gain ratio (G/B)	(G/B)P																								
16	KILLER POINT	D_KILL																								

Input the signal as shown in Diagram 1 to Input B, R, G, and B outputs  $V_x$  are taken as  $V_R, V_G,$  and  $V_B$  respectively. At this time vary input signal from 0° to 360° and test maximum value  $V_{RMAX}, V_{GMAX},$  and  $V_{BMAX}$  of  $V_R, V_G,$  and  $V_B$ . Phase angles of each output at maximum value are taken as  $\phi_{RP}, \phi_{GP},$  and  $\phi_{BP}$  respectively. (Get maximum value at each output.) At this time the following formulas are applied.  
 $\phi_{BP} = \phi_{RP}$   
 $\phi_{RP} = \phi_{GP} - \phi_{BP}$   
 $\phi_{GP} = \phi_{RP} - \phi_{BP}$   
 And also,  
 $(R/B)P = V_{RMAX}/V_{BMAX}$   
 $(G/B)P = V_{GMAX}/V_{BMAX}$

Diagram 1: Input signal  
(Signal variable form 0° to 360° phase of burst signal)

Diagram 2: RGB each output signal

Alternate SIG4 less than 300mVpp and test amplitude of SIG4 when color killer operates. The following formula is applied for  $D_{KILL}$  when the value is taken as  $V_x$ ,  $20 \log \frac{V_x}{300}$




No	Item	Symbol	SW conditions										Bias conditions (V)					Input C conditions	Test point	Details of measurement	Min	Typ	Max	Unit															
			2	3	4	5	6	7	8	101	102	E1	E2	E3	E4	E5																							
27	3.58 $f_0$	$\Delta F_N$	d																			-180	30	230															
28	APC pull-in (+)	$\Delta F_{CPU}$	e																																				
	APC pull-in (-)	$\Delta F_{nos}$	e																																				
30	Horizontal power supply voltage	$V_{CH}$	a																																				
31	Vertical power supply inflow current	$I_{CV}$																																					
	Vertical triangle level (H) 1	$V_{H1}$																																					
33	Level (M) 1	$V_{M1}$																																					
	Level (L) 1	$V_{L1}$																																					
35	S/S output level (H)	$V_{S1H}$																																					
	S/S output level (L)	$V_{S1L}$																																					
37	S/S output pulse width	$t_{S1S}$																																					

The contents of test are the same as the same as items 17 to 19.  
 $\Delta F_N = F_N - 3579545\text{Hz}$   
 $F_N$ : Free run frequency  
 $\Delta F_{CPU} = f_x - F_N \text{ Hz}$   
 (When  $f_x$  is  $f_x > F_N$ )  
 $\Delta F_{nos} = f_x - F_N \text{ Hz}$   
 (When  $f_x$  is  $f_x < F_N$ )


Test voltage at Pin 25 when current 15mA is flowed into Pin 25.

Test the current flows into Pin 19

Test the voltages  $V_{M1}$ ,  $V_{L1}$ , and  $V_{L1}$  at Pin 17 after 9.5H, 160.5H, and 311.5H' from  $V_{sync}$  pulse rising.

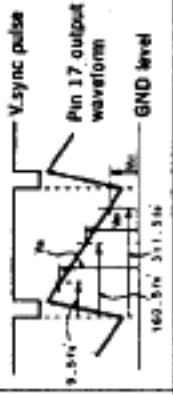

Test each level  $V_{S1H}$  and  $V_{S1L}$ , and pulse width  $t_{S1S}$  from GND of Pin 32 output.

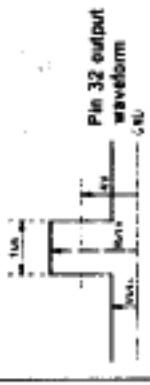







No	Item	Symbol	SW conditions										Bias conditions (V)					Input C conditions	Test point	Details of measurement	Min	Typ	Max	Unit		
			2	3	4	5	6	7	8	101	102	E1	E2	E3	E4	E5	0								3	
49	Horizontal pull-in range 1	$F_{H1}$	a	a	a	a	a	a												SIG8	Pin 37 Input C	Confirm the output waveform Pin 37 agrees with $f_H = 16.075\text{kHz}$ and $f_V = 15.175\text{kHz}$ of SIG8 and SIG9 which are input to Input C. This range is to be pull-in range.	15.175		16.075	kHz
			a	a	a	a	a	a	20	9.0	5	3	0						SIG9							
51	Vertical pull-in range 1	$F_{V1}$																			Pin 37 Input C	Pull-in frequency range which varies V frequency and synchronizes from asynchronism. * However, let $f_H = 15.625\text{kHz}$ (Compulsion 50Hz mode)	42.1	50	72.6	Hz
																				SIG1						
52	Vertical pull-in range 2	$F_{V2}$																			Pin 37 Input C	Pull-in frequency range which varies V frequency and synchronizes from asynchronism. * However, let $f_H = 15.625\text{kHz}$ (Compulsion 60Hz mode)	48.6	60	72.6	Hz

Electrical Characteristics Test Circuit

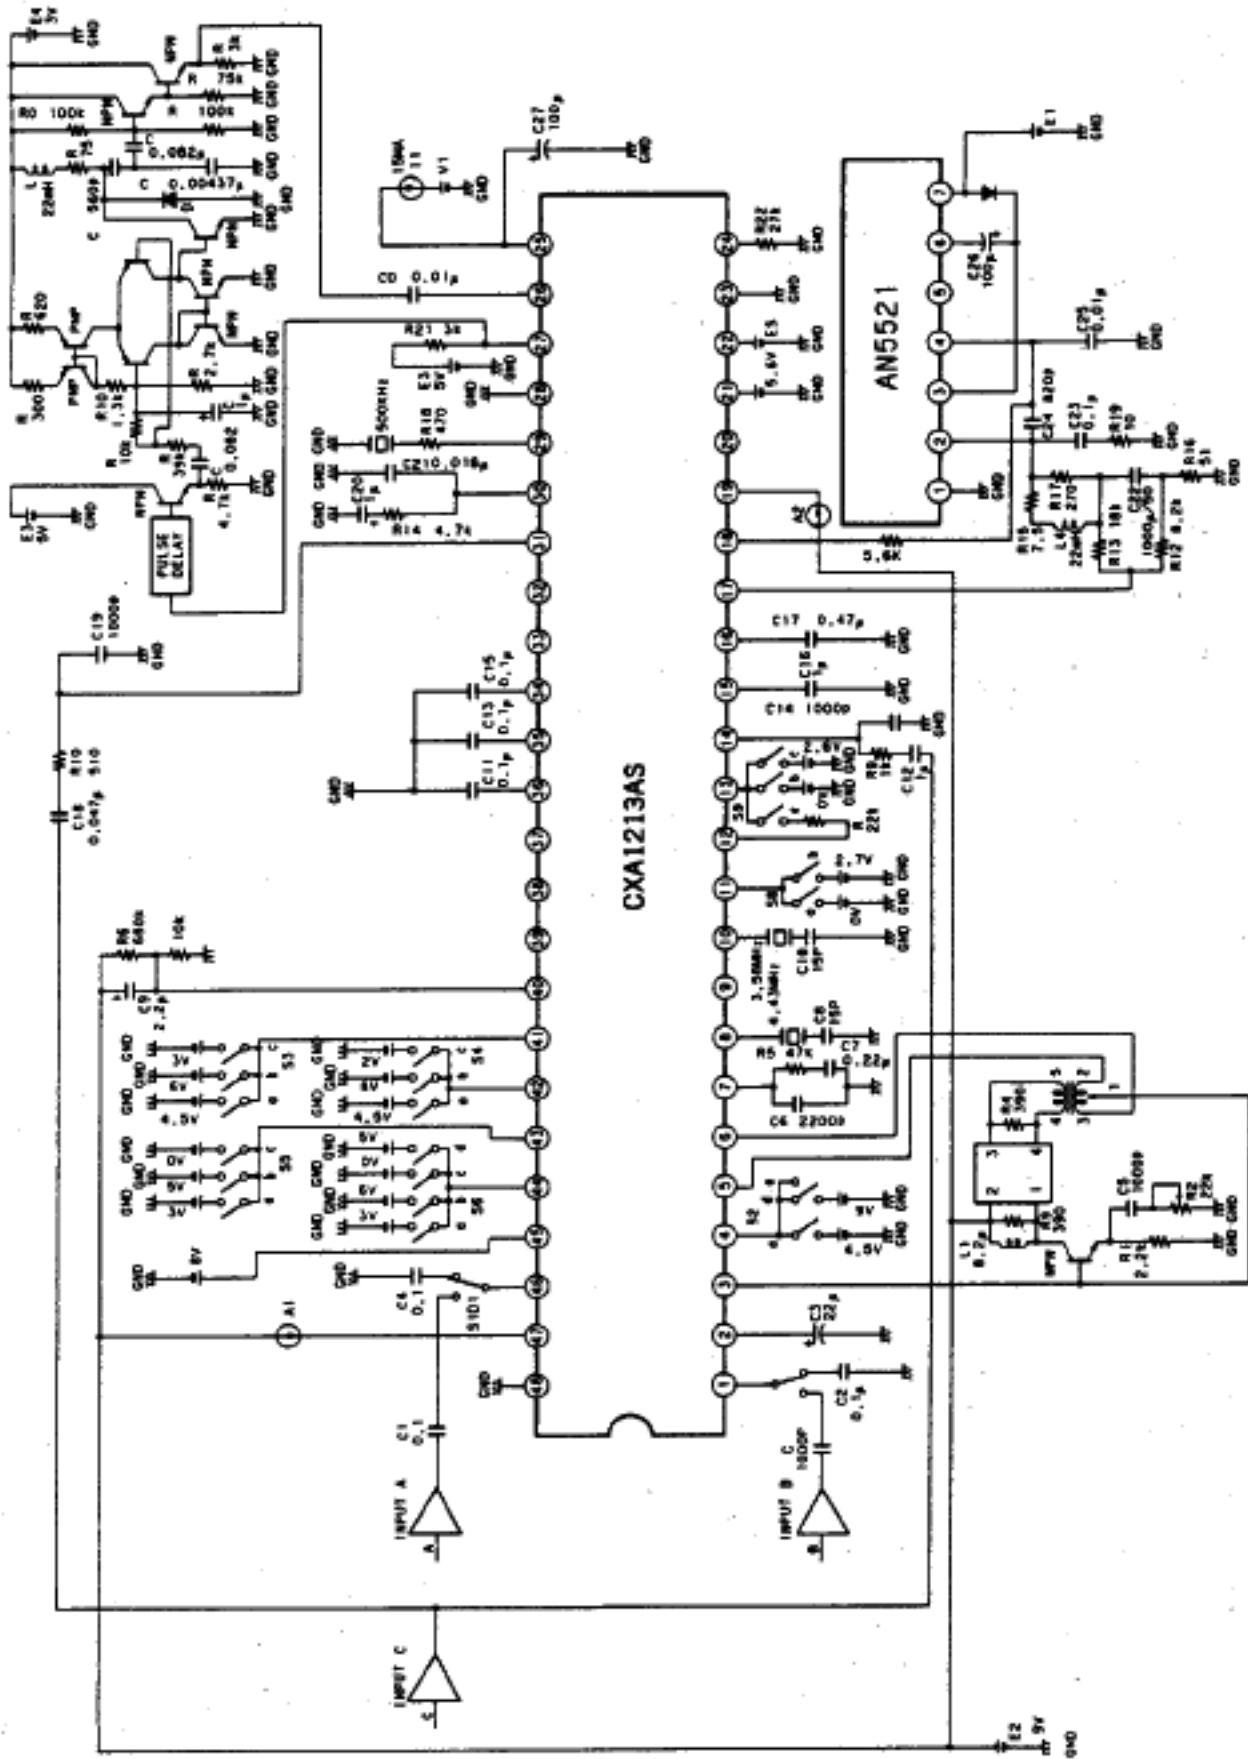

## Input Signal

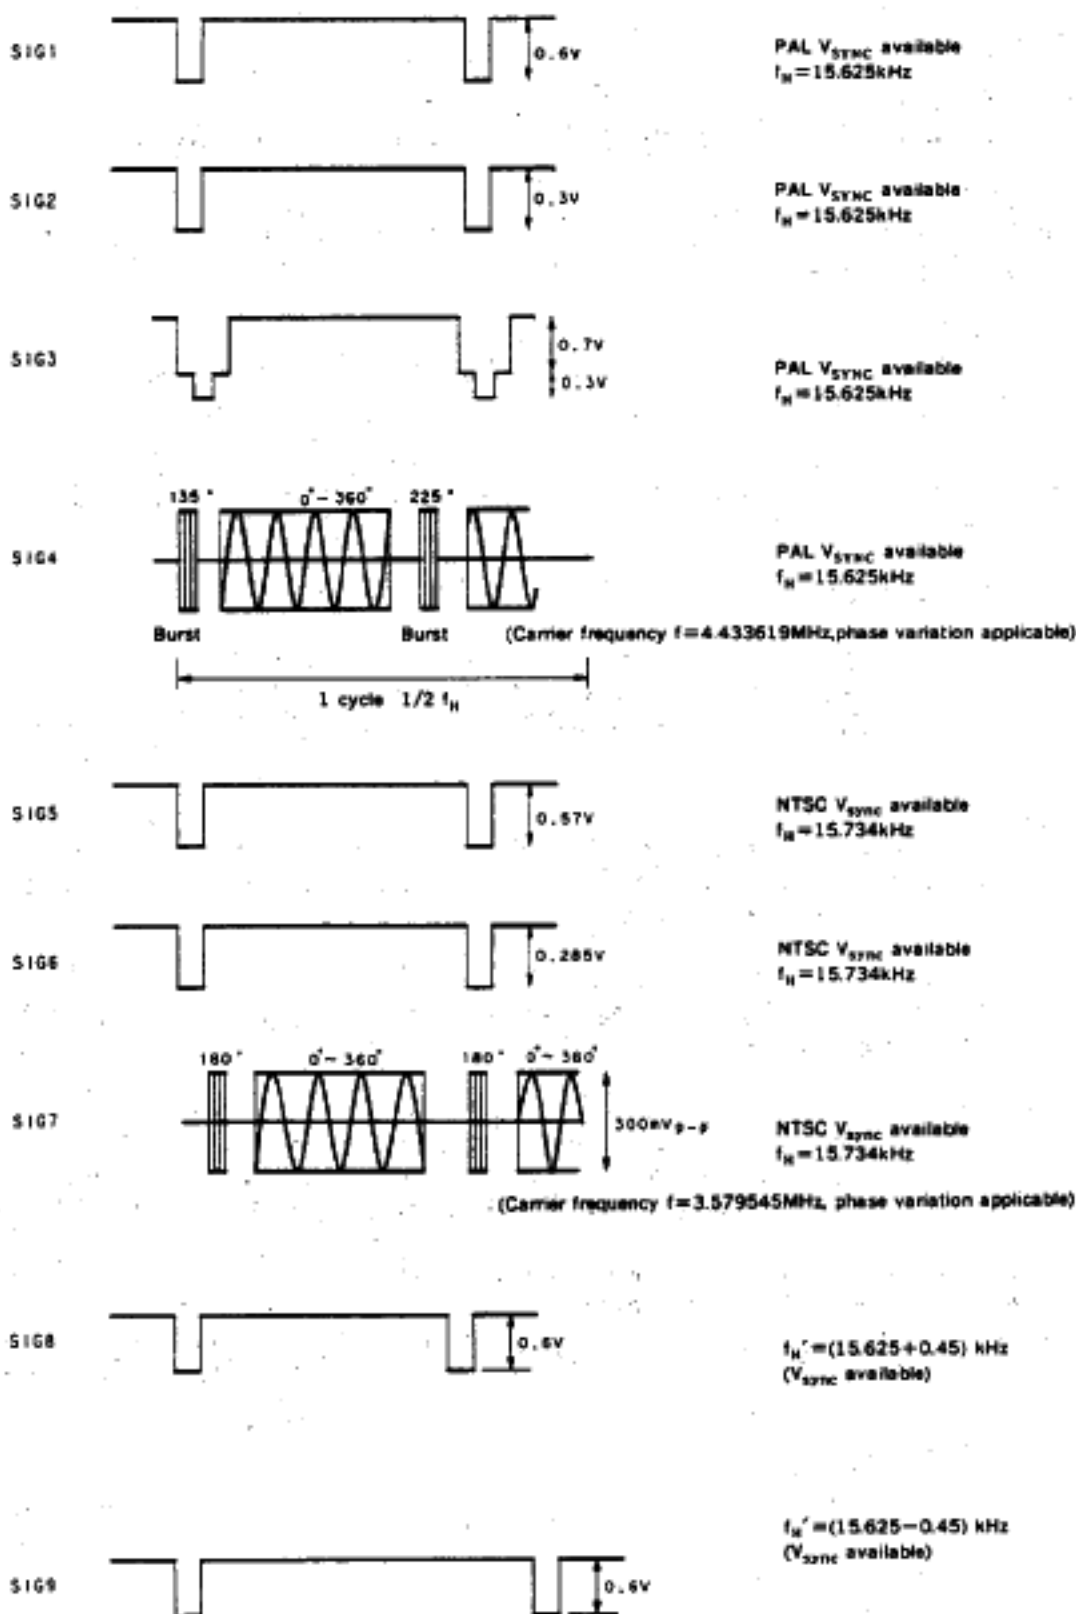


T-77-07-09

**Absolute Maximum Ratings (Ta=25°C)**

• Supply voltage	$V_{CC}$	12	V
• Storage temperature	$T_{stg}$	-65 to +150	°C
• Allowable power dissipation	$P_D$	2.2	W

**Recommended Operating Conditions**

• Supply voltage	$V_{CC}$	$9 \pm 1$	V
• Operating temperature	$T_{opr}$	-20 to +75	°C

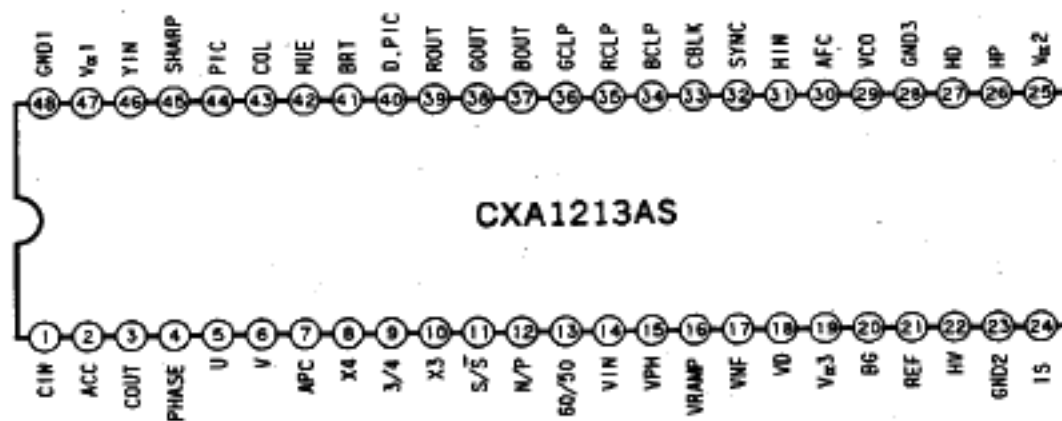**Pin Configuration**

**Operation Description****(1) Luminance signal system****(i) SHP circuit**

The luminance signal that is input from Pin 46 is emphasized around 3.0 MHz of luminance signal by SHP circuit. Connect Pin 45 to  $V_{CC}$  so that SHP circuit gets OFF when it is not necessary.

**(ii) BLK MUTE circuit**

Connecting Pin 41 to  $V_{CC}$  replaces BLK section to black level and connection with auto white balance IC (CXA1024S) applicable.

**(iii) Fast BLK circuit**

Inputting the character signal etc. to CBLK pin makes the function that attenuates the character signal part of video signals available.

**(iv) New Dynamic Picture circuit**

The function to expand black operates in the signals under 50IRE of input signal. Connecting Pin 40 at around 10k $\Omega$  resistance makes the function cancelled.

**(2) Chroma system****(i) ACC circuit**

Detects the burst signal (that is demodulated by average level detection) by ACC DET and applies return to ACC amplifier according to the detection output to keep the demodulated burst level always stable.

**(ii) APC circuit**

The input chroma component from Pin 1 composes B-Y signal and R-Y signal by detecting to the external crystal at Pin 8 (3.58MHz) or Pin 10 (4.43MHz), which are output of VCO by APC circuit, after it is amplified via ACC and color amplifiers.

**(iii) Matrix**

Composes G-Y signal by mixing B-Y and R-Y signals. Then, outputs at R,G, and B original signal by these signals and the luminance signal Y.

**(iv) ID correction**

PAL system is sent after R-Y (V) component of the signal gets inverted every 1H. Due to this reason, the demodulation axis also needs to be inverted every 1H. The R-Y axis is inverted every 1H synchronizing with HP in this IC, however, the flip-flop corrects it if it is wrong according to R-Y burst detection output.

**(v) SECAM system applicable (Combined with the CXA1214P)**

The combination with the CXA1214P enables the SECAM signal demodulated. (See Application Circuit 2) Inputting the direct voltage of H level (over 2.5V) and R-Y and B-Y signals, which SECAM signal is demodulated to R CLP (Pin 35) and B CLP (Pin 34) via direct capacitor make the original signals R,G, and B output.

## (3) Jungle system

The count down system is adopted by the  $32f_H$  ceramic oscillator.

Due to these reason, no adjustment of H and V free run frequency is realized and the number of pins and external parts get lesser.

The horizontal synchronization circuit adopts double loops. The input, VCO frequency and phase are combined and the HD pulse is generated in the first loop and the phase with FBP of deflection is combined in the second loop.

The burst gate pulse is generated synchronizing with the input horizontal sync, however this generates a artificial pulse at no signal with a artificial horizontal sync from the horizontal count down circuit.

The vertical synchronization circuit varies the width of input prohibition gate according to input frequency and shortens the section that vertical sync passes through to improve the elimination capacity of the noises going into vertical sync. (See Diagram of (i) Vertical Synchronization Prohibition Gate)

At the same time, the eliminated capacity of the noises are furthermore improved since the peak hold circuit is adopted at vertical sync separation circuit.

The auto discrimination circuit is built in when Switching 50 or 60Hz.

## (i) Vertical synchronization prohibition gate


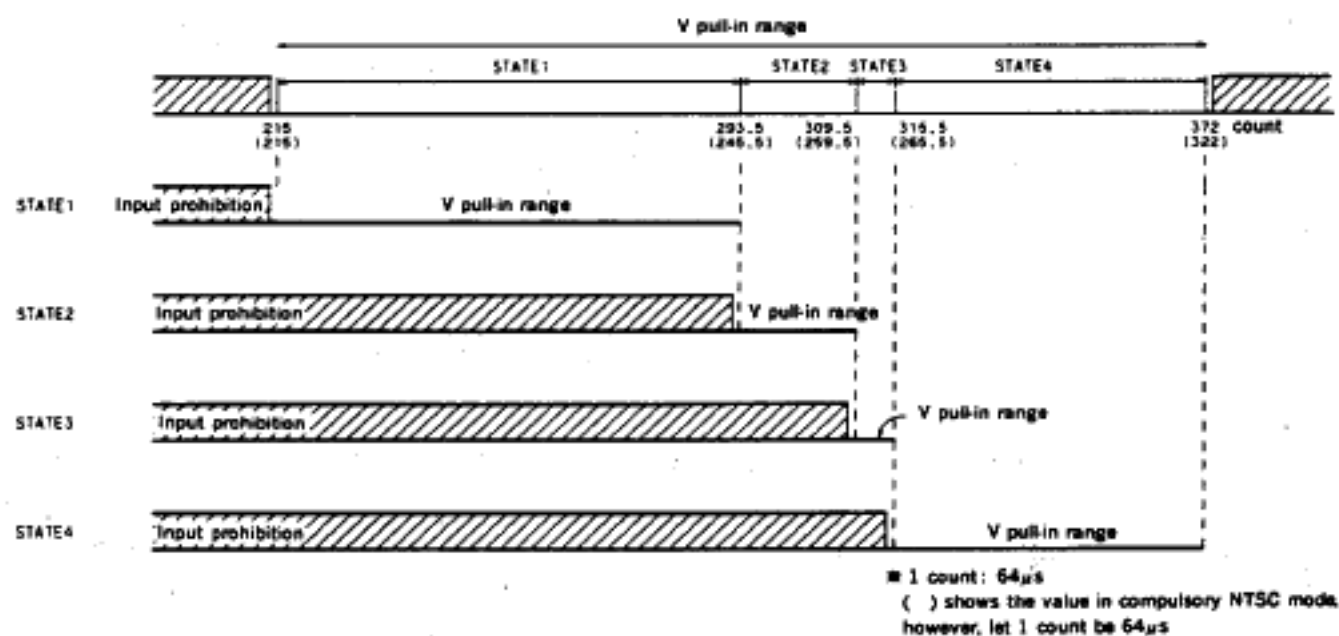


Diagram 1. Vertical pull-in range

This is synchronized in state 1 to 4 by vertical sync wavelength. The vertical pull-in range is composed as Diagram 1. Through this, the noise is eliminated as providing the input prohibition gate severely not to discriminate the non-continuous noise pulse besides vertical sync. (ex. VHS noise).

## (ii) 50/60Hz Discrimination Operation

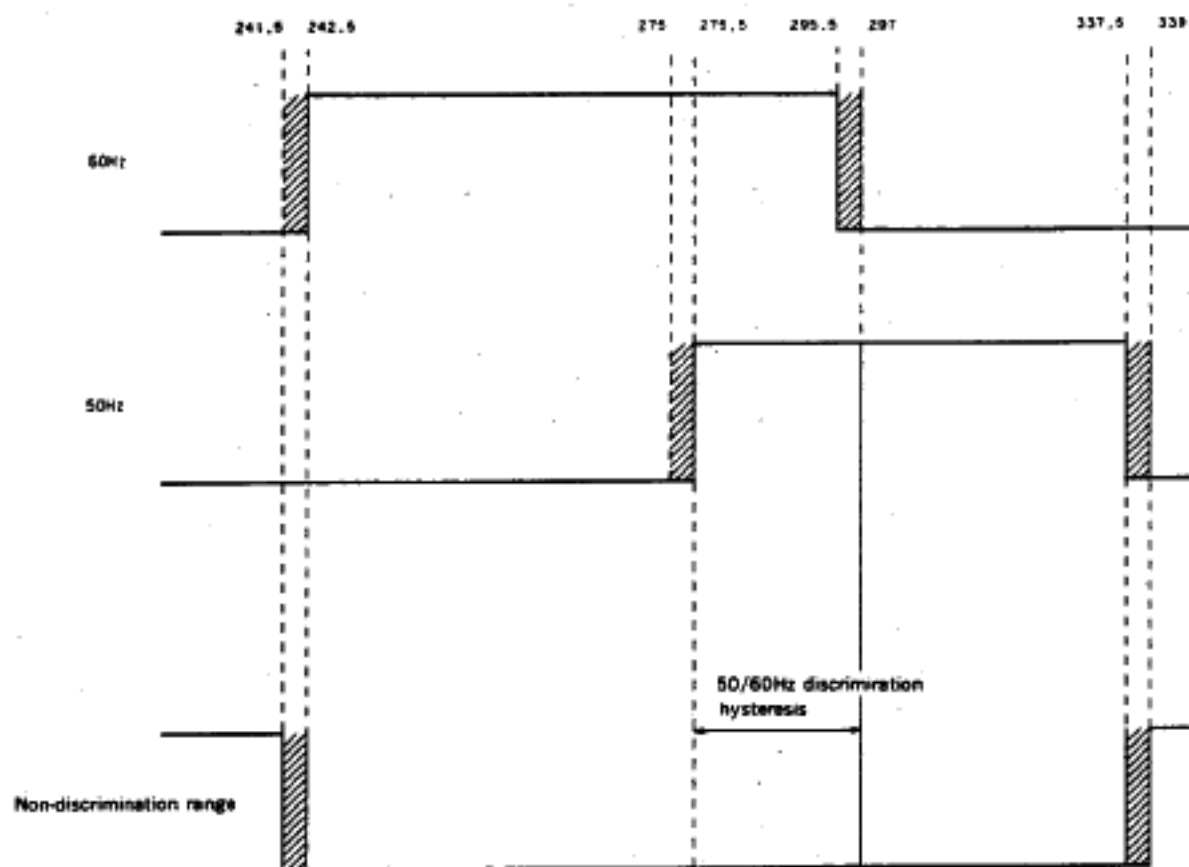


The count number is  $64\mu\text{s}$  by a count ( $=1/f_{\text{H}}$ )

**Diagram 2. 50/60Hz Discrimination Range**

This IC automatically discriminates the discrimination of 50Hz and 60Hz from the input vertical sync. The 50Hz has priority when the power supply is on and discriminates as in Diagram 2 by vertical sync wavelength. The discrimination output pin is Pin 13, and outputs as 60Hz mode H and 50Hz mode L.

For example, this discriminates as 60Hz mode when the input signal is from 242.5 to 295.5 counts and 50Hz mode when the input signal is from 275.5 to 337.5 counts. And the hysteresis is provided between the count from 275.5 to 295.5. No discrimination occurs besides those so that the discrimination output of former state is held.

The mark , which is a discrimination error occurs due to like an error of vertical sync separation circuit in this IC, is a state that discriminates as either 50Hz or 60Hz.







Bright Control Characteristics

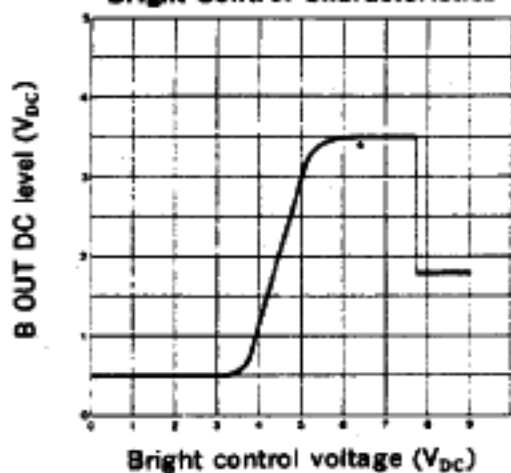


Fig. 1

Picture Control Characteristics

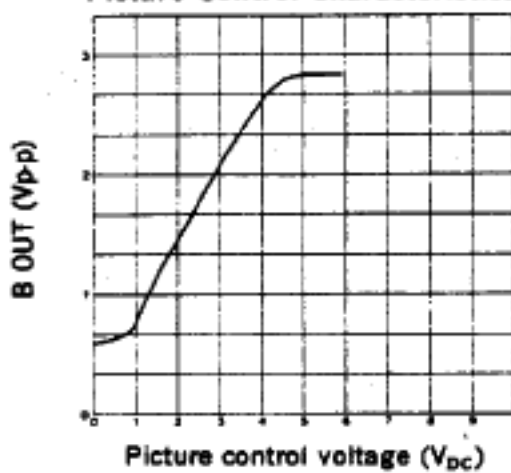


Fig. 2

New Dynamic Picture I/O Characteristics

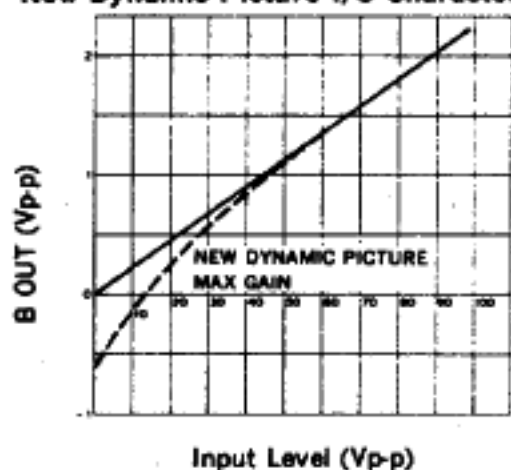


Fig. 3

Color Control Characteristics

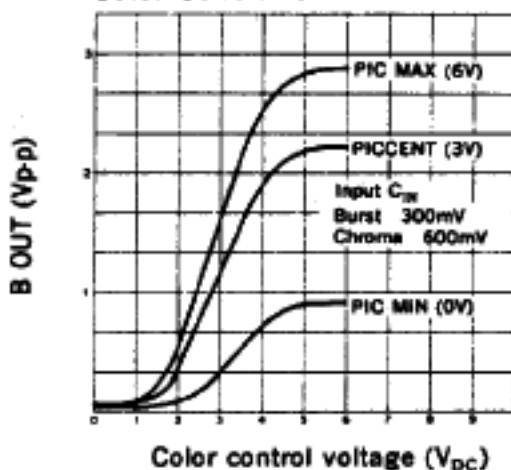


Fig. 4

ACC Characteristics

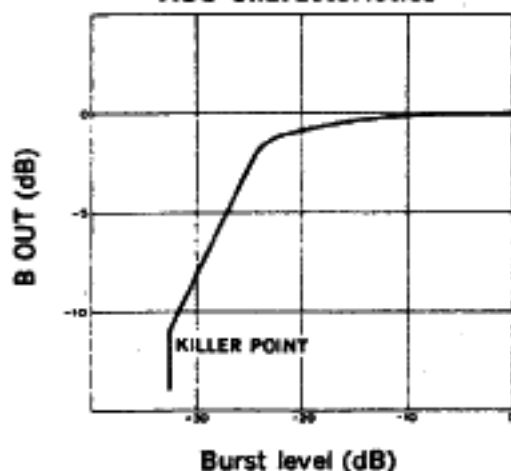


Fig. 5

Y. Signal Frequency Characteristics


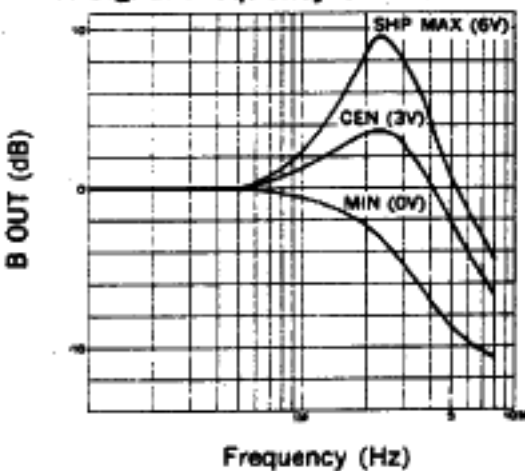


Fig. 6

## HUE Control Characteristics

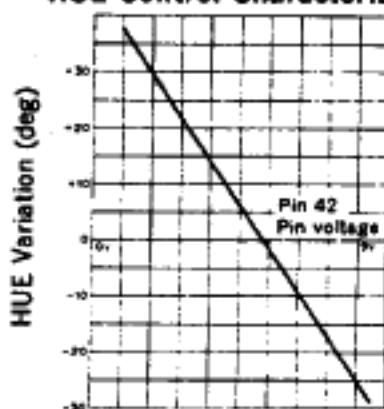

Pin voltage at pin 42


Fig. 7

## Notes or Operation






- (1) Recommend adjusting the free run frequency to 4.433619MHz and 3.579545MHz by using the trimmer capacitor.
- (2) The HUE characteristics 1 and 2 are tested at HUE pin voltage 8V and 2V. The HUE center is about 6.0V.
- (3) Adjust the detection axis of PAL mode B output to 0deg by controlling Pin 4 (PHASE).
- (4) Input the signal to Pin 33 in the emitter follower type when the high speed blanking function used.






## Package Outline Unit : mm

48pin SDIP (Plastic) 600mil 5.1g

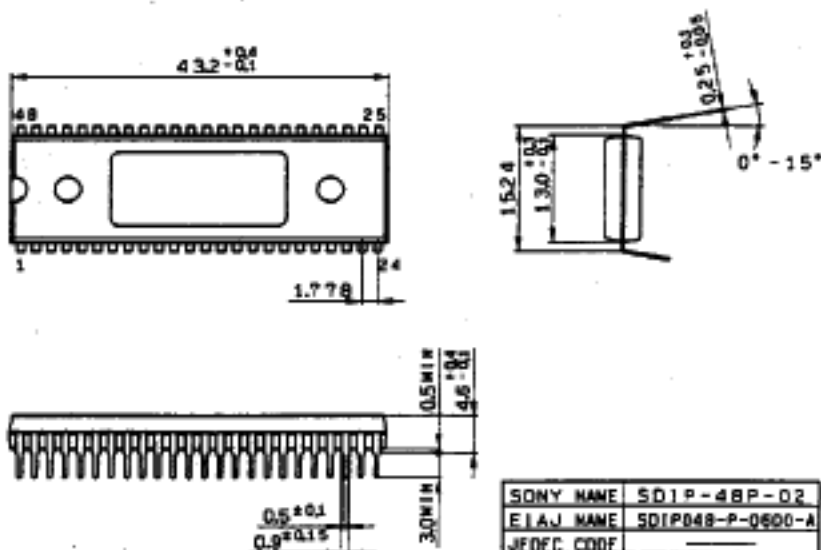

## Pin Description

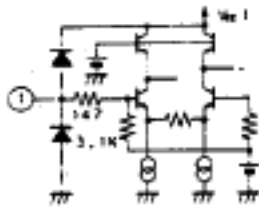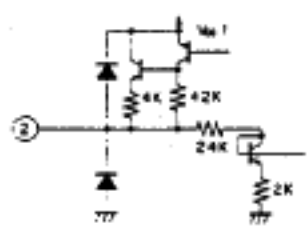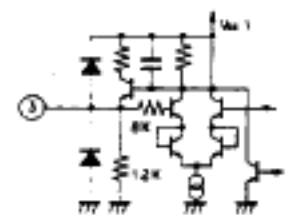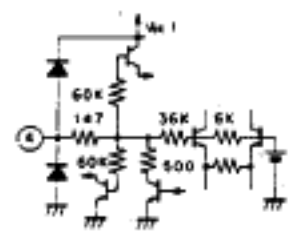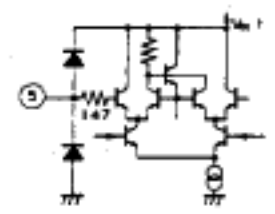No.	Symbol	Voltage	Equivalent circuit	Description
1	$C_{IN}$	2.5V		Chroma input pin. Input signal after passing chroma B.P.F via capacitor.
2	ACC	Approx. 5.5V (At Typ. input)		External capacitance pin for ACC control. This pin voltage is to be ACC voltage.
3	$C_{OUT}$	SECAM : 5.85V SECAM : 0V		ACC and chroma output pin after passing color control circuit. Pin voltage varies by SECAM/SECAM. At SECAM: $5.85V_{DC}$ At SECAM: $0V_{DC}$
4	PHASE	4.5V		Phase control voltage input pin for PAL. This pin is also applicable to forced killer input, killer output and $f_{sc}$ free run adjustment mode. $V_{DB}$ : Forced fsc free run adjustment 2 to 8V : Phase control GND : Forced killer input or killer output
5	U	—		U signal input pin after separating $C_{OUT}$ signal at Pin 3 to U and V by using 1H Delay Line.

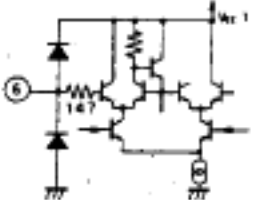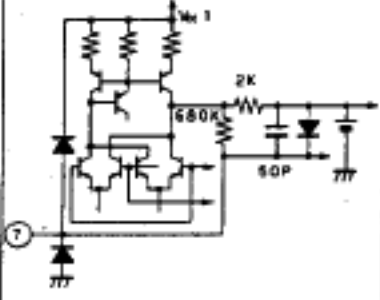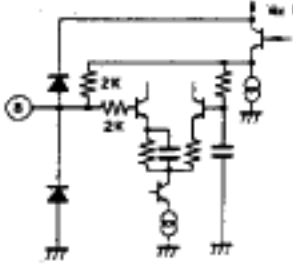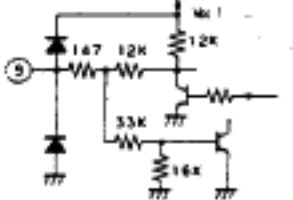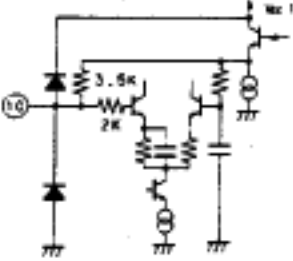No.	Symbol	Voltage	Equivalent circuit	Description
6	V	—		V signal input pin after separating C <sub>OUT</sub> signal at Pin 3 to U and V by using 1H Delay Line.
7	APC	6.7V		Lag lead filter pin for APC
8	X4			4.43MHz crystal pin for chroma VCO
9	3/4	At 3.58MHz output: 5.5V AT 4.43MHz output: GND		Discrimination output pin of VCO oscillation frequency. High level(5.5V) at oscillation frequency 3.58MHz, Low level at oscillation frequency 4.43MHz. Also input pin applicable: Forced 3.58MHz at mode H and 4.43MHz at mode L. Repeats H and L every 5 Vertical section at killer mode.
10	X3			3.58MHz crystal pin for chroma VCO.






No.	Symbol	Voltage	Equivalent circuit	Description
11	S/S	—		SECAM/SECAM input pin. Input high voltage over 2.7V at SECAM and low voltage under 0.3V at SECAM.
12	N/P	—		NTSC/PAL input pin. Input low voltage under 0.3V at PAL and high voltage over 3.0V at NTSC.
13	60/50	At 50Hz: 0V At 60Hz: 4V		Discrimination output pin of vertical frequencies 50Hz and 60Hz. Also input pin applicable: Forced 60Hz mode at $V_{CC}$ , Forced 50Hz mode at GND.
14	$V_{IN}$			Input pin for vertical sync separation. Slice level is decided by internal constant current of $40\mu A$ and protection resistance $R_p$ and external resistance. Video signal is input at 2Vp-p.
15	VPH	3.35V		Pin to detect slice level to take out V.sync peak of sync separation output is detected at this pin. Connect Capacitor or Capacitor and Resistance between GNDs for external fixing.

No.	Symbol	Voltage	Equivalent circuit	Description
16	VRAMP			Generates saw tooth wave for vertical deflection. Use the external capacitance which holds a stable temperature characteristics.
17	VNF	—		Feedback pin for vertical deflection. This is compared to saw tooth wave generated at Pin 16 with comparator and obtains almost the same waveform as internal saw tooth wave.
18	VD			Pin which outputs the difference of comparison between feedback waveform at Pin 17 and internal saw tooth wave.
19	V <sub>CCS</sub>	9V		Power supply pin for vertical drive circuit. This supplies a stable 9V voltage.
20	BG			Burst gate pulse is output. Artificial H.sync is supplied instead of H.sync when AFC is not locked like at no signal, and it outputs approx. 4μs width pulse.
21	REF	—		Pins 21 and 22 are the pins to detect over voltage and to make it hold down. This supplies reference voltage to Pin 21 and high voltage detection output to Pin 22.
22	HV	—		
23	GND2	0V		GND pin for Jungle.
24	IS	2.1V		Pin to generate the reference current to be used at internal IC. Use the external resistance at 27kΩ which holds a stable temperature characteristics since the reference current is 80μA.

No.	Symbol	Voltage	Equivalent circuit	Description
25	V <sub>CC3</sub>	9V		<p>Power supply pin for horizontal drive circuit. Shunt regulator provided inside and it regulates to 9V. Since the current flowed into is approx. 15mA, the R<sub>g</sub> value is obtained by the following formula when +B is +115V.</p> $R_g = \frac{(115-9)V}{15mA} = 7.07 \rightarrow 6.8k\Omega$
26	HP	4.3V		FBP input pin and inputs it via capacitor.
27	HD			Horizontal drive output pin and open collector output. Drive pulse width is 24μs constant.
28	GND3	0V		Horizontal drive GND pin.
29	VCO			Connect ceramic oscillator for 32f <sub>H</sub> VCO and dumping resistance. CSB500F2 for ceramic oscillator and 470Ω for dumping resistance are recommended.
30	AFC	5.2V		Pin that connects AFC loop filter.



No.	Symbol	Voltage	Equivalent circuit	Description
31	H <sub>IN</sub>	2.3V		Input pin for H.sync separator. The form of circuit is the same as V.sync separator, however, set the slice level lower and time constant shorter than V.sync Separator when H.sync separator.
32	Sync			Outputs sync pulled out in H.sync Separator circuit.
33	C BLK			C BLK output pin and BLK signal input pin. BLK input is ON: over 2.5V at H. OFF: under 0.3V at L Input in emitter follower circuit at input pin.
34	B CLP	6.2V		External Capacitor pin for B-Y signal color clamp. Also B-Y signal input pin of SECAM.
35	R CLP	6.2V		External Capacitor pin for R-Y signal color clamp. Also R-Y signal input pin of SECAM.

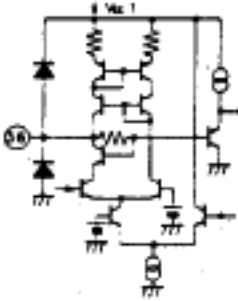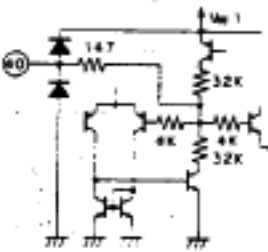No.	Symbol	Voltage	Equivalent circuit	Description
36	G CLP	6.2V		External Capacitor pin for G-Y signal color clamp.
37	B <sub>OUT</sub>			B signal output pin.
38	G <sub>OUT</sub>			G signal output pin.
39	R <sub>OUT</sub>			R signal output pin.
40	D. PIC	4V		External Resistance and Capacitor pin for black peak hold of New Dynamic Picture. Connect this pin to GND at 10kΩ when you want New Dynamic Picture OFF.