



Radial Leaded PTC Resettable Fuse: FRX 375-60F

1. Summary

- (a) **RoHS Compliant (Lead Free) Product**
- (b) **Applications: Wide variety of electronic equipment**
- (c) **Product Features: Low hold current, Solid state, Radial leaded product ideal for up to 60V**
- (d) **Operation Current: 3.75A**
- (e) **Maximum Voltage: 60V**
- (f) **Temperature Range : -40°C to 85°C**

2. Agency Recognition


- UL: File No. E211981
- C-UL: File No. E211981
- TÜV: File No. R 50004084

3. Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max.Time to Trip	Maximum Current	Rated Voltage	Typical Power	Resistance	
	I _H , A	I _T , A	at 5xI _H	I _{MAX} , A	V _{MAX} , Vdc	P _d , W	R _{MIN} ohms	R _{1MAX} ohms
FRX375-60F	3.75	7.50	24.0	40	60	3.20	0.03	0.08

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.
I_T=Trip current-minimum current at which the device will always trip at 23°C still air.
V_{MAX}=Maximum voltage device can withstand without damage at its rated current.
I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
P_d=Typical power dissipated from device when in tripped state in 23°C still air environment.
R_{MIN}=Minimum device resistance at 23°C.
R_{1MAX}=Maximum device resistance at 23°C, 1 hour after tripping .
Physical specifications:
Lead material: Tin plated copper, 20 AWG.
Soldering characteristics: MIL-STD-202, Method 208E.
Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement.

4. Production Dimensions (millimeter)

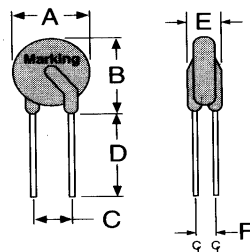


FRX 375-60F
Lead Size: 20AWG
Φ 0.81 mm Diameter

Part Number	A	B	C	D	E	F
	Maximum	Maximum	Typical	Minimum	Maximum	Typical
FRX375-60F	28.5	33.5	10.2	7.6	3.1	1.4


NOTE : Specification subject to change without notice.



5. Thermal Derating Curve

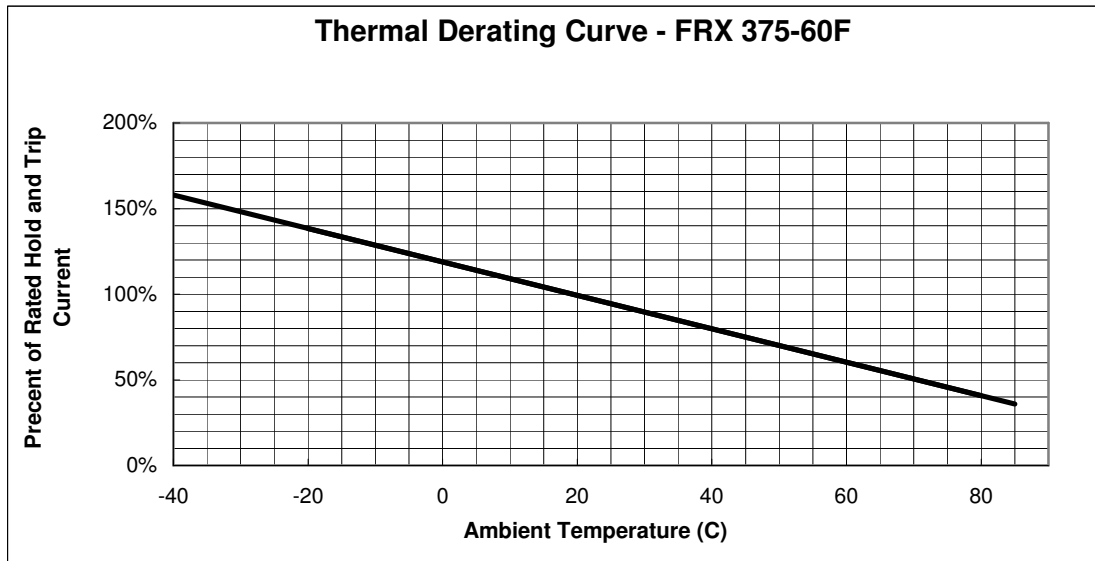

6. Typical Time-To-Trip at 23°C

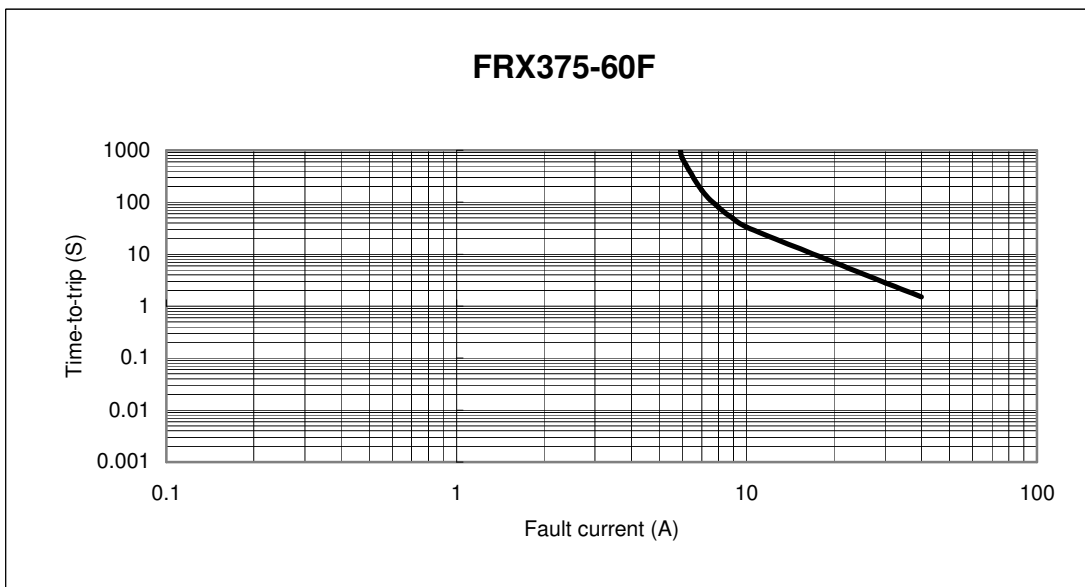

NOTE : Specification subject to change without notice.



7. Material Specification

Lead material : Tin plated copper, 20 AWG.


Soldering characteristics: MIL-STD-202, Method 208E.

Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement

8. Part Numbering and Marking System


Part Numbering System

F R X □ □ □ — □ □ F

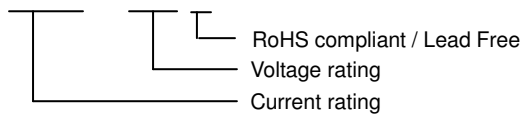

Example

Part Marking System

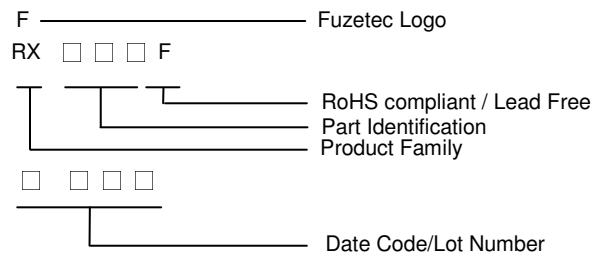

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.