
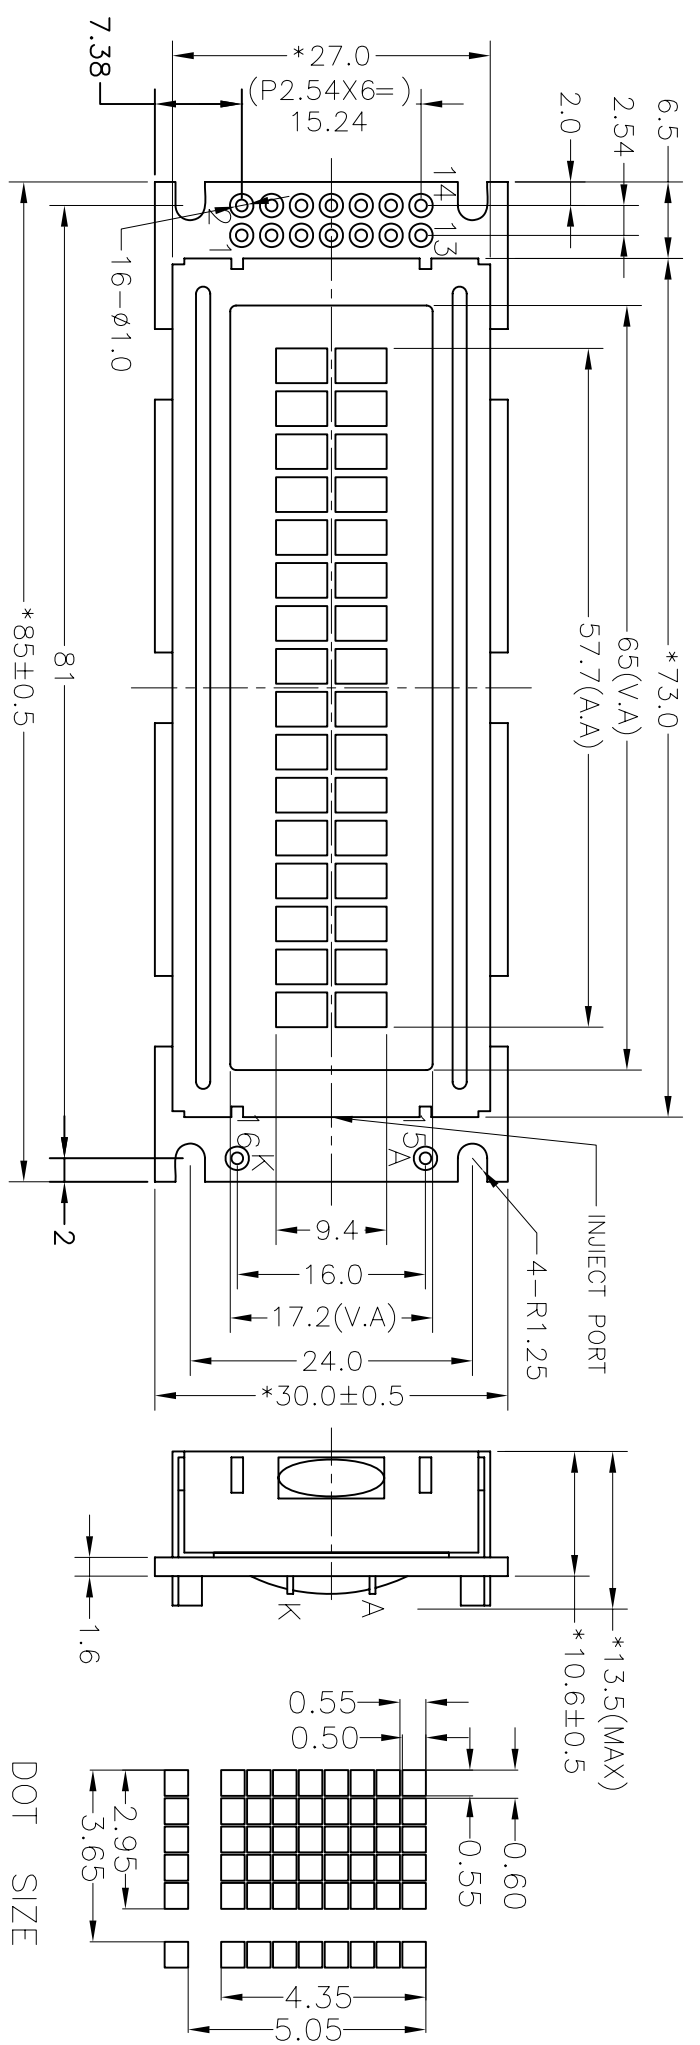


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	AUG-29-2007
B	Change LOGO 	DEC-03-2007

VIEWING DIRECTION 



DOT SIZE
SCALE: 4:1

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VDD	VSS	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.2V
- 2). Viewing direction: 12 O'clock
- 3). Display mode: STN/Positive/Transflective/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-001B-C(or compatible)
- 7). Backlight:Bottom, Y-G
- 8). Dimensions with mark "*" are important, with mark "()" are referenced
- 9). All the raw materials are RoHS compliant.





深圳秋田电子有限公司
SHENZHEN AVIDISPLAY CO.,LTD.

SCALE: FIT 适应图面
比例: 1 OR 1

SHEET: 1 OF 1
页次: 1

GENERAL TOL: ±0.3
公差: ±0.3

UNIT 单位: mm
日期: _____

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	DATE 日期
ABC016002F04-YKY-R-01			ABC016002F04-YKY-R-01	CHK: DWN:	

DO NOT SCALE THIS DRAWING.