



Note
 1-100% Testes No Short or Break Circuit
 2-Storage condition:
 Temp: 15°C ~ 25°C
 Humidity: 30 ~ 60RH%
 3-Conductor : 0.035x0.65mm
 4-Supporting Tapc: 0.225mm PET,BLUE
 5-Insulation: 0.043mm PET,White

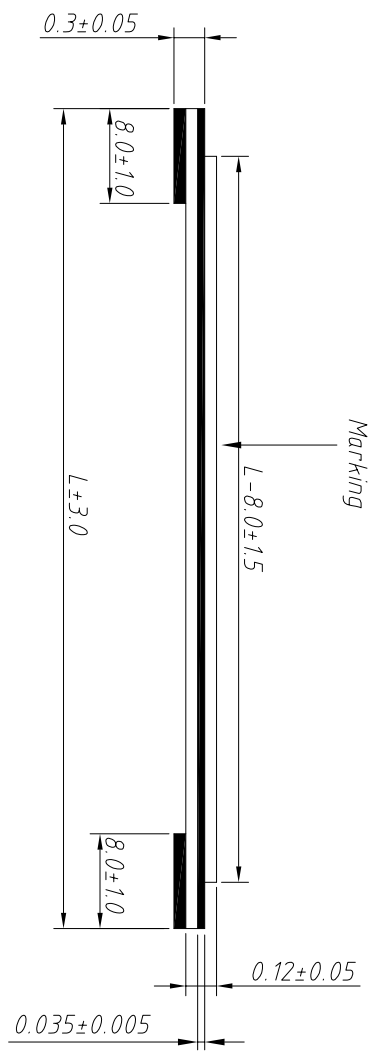

Order Information


L-KLS17-FFC-1.0-XXP-LXXX A 4/8

- L: RoHS
- 1.0: Pitch 1.0mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- A: Type
- 4/8: Strip Length/Supporting Tape Length

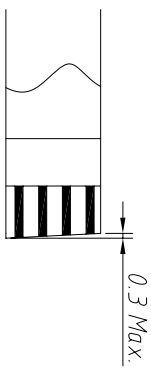


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	UNITS	⊕	Description:	
.X ±0.38	.X ±3°	SHEET SIZE	A4	Pitch 1.0mm FFC Cable A Type	
.XX ±0.25	.XX ±2°	KLS P/N:	KLS17-FFC-1.0-XXP-LXXXA4/8		
Draw by: Date					
Check by: Date					
SCALE	SHEET				

KLS ELECTRONIC CO., LTD.

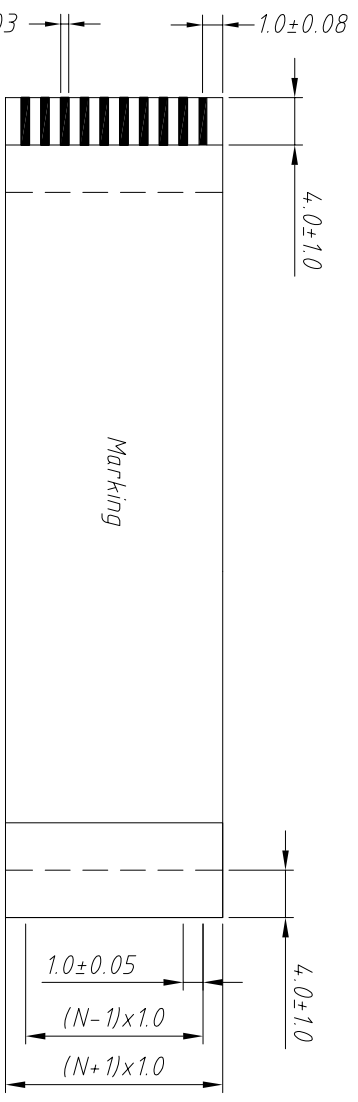


Note
 1-100% Testes No Short at Break Circuit
 2-Storage condition:
 Temp: 15°C ~ 25°C
 Humidity: 30 ~ 60RH%
 3-Conductor : 0.035×0.65mm
 4-Supporting Tapc: 0.225mm PET,BLUE
 5-Insulation: 0.043mm PET,White

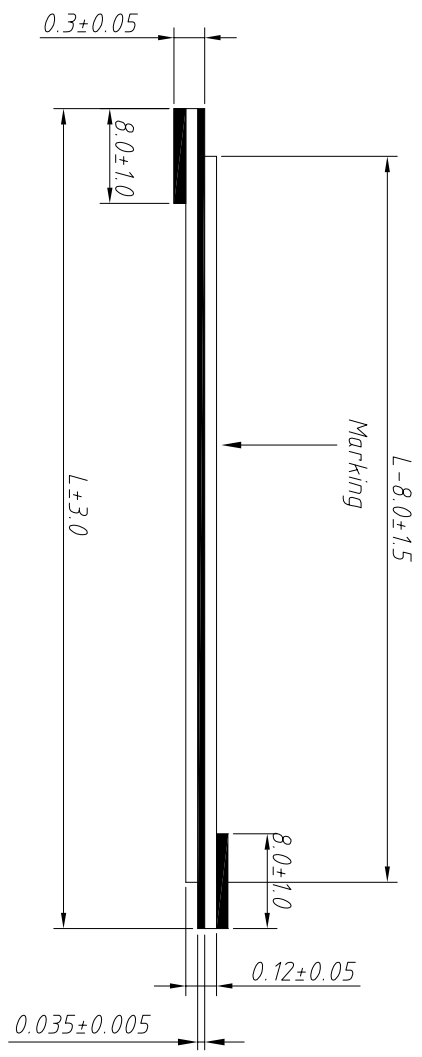

Order Information




L-KLS17-FFC-1.0-XXP-LXXX B 4/8

- L: RoHS
- 1.0: Pitch 1.0mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- B: Type
- 4/8: Strip Length/Supporting Tape Length

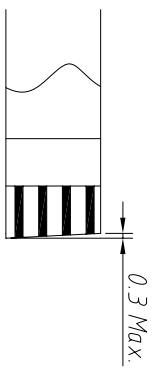

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	UNITS	⊕	⊖	Description:
X: ±0.38	X: ±3°	SHEET SIZE	mm	A4	Pitch 1.0mm FFC Cable B Type
XX: ±0.25	XX: ±2°	KLS P/N:	KLS17-FFC-1.0-XXP-LXXXB4/8		
Draw by: Date					
Check by: Date					
SCALE		SHEET			

KLS ELECTRONIC CO., LTD.

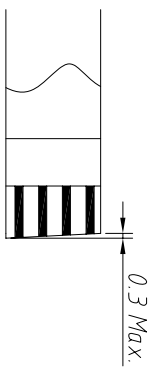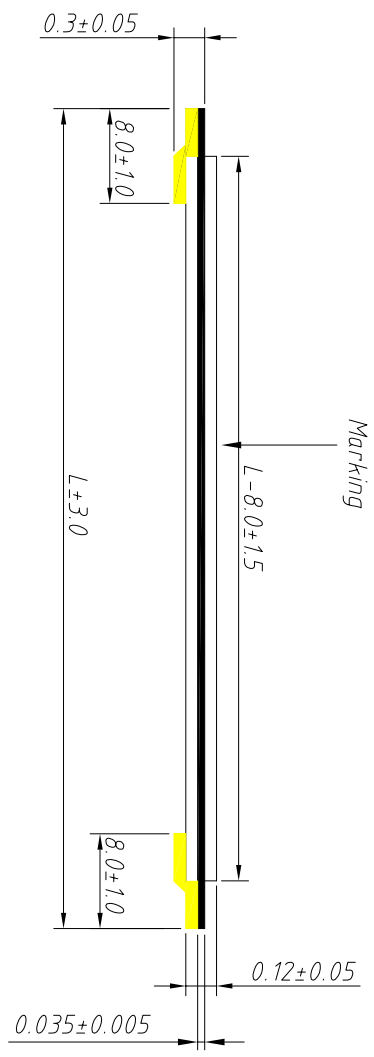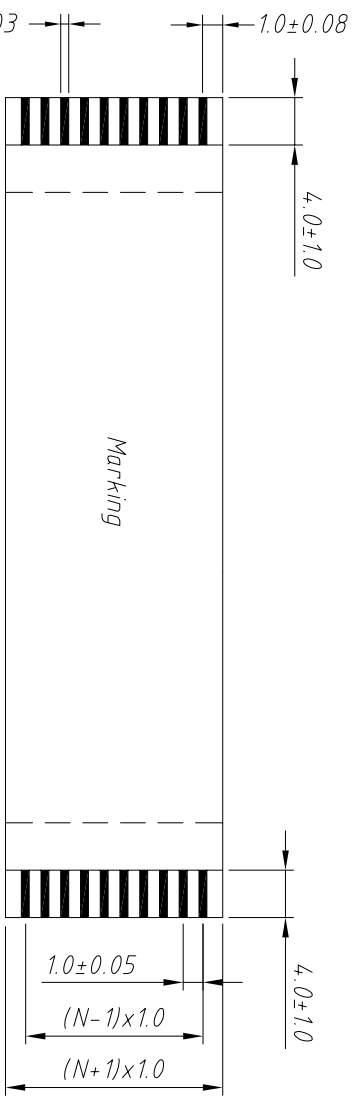




Note
 1-100% Testes No Short or Break Circuit
 2-Storage condition:
 Temp: 15°C ~ 25°C
 Humidity: 30 ~ 60RH%
 3-Conductor : 0.035×0.65mm
 4-Supporting Tapc: 0.225mm PET,BLUE
 5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-10-XXP-LXXX C 4/8

- L: RoHS
- 10: Pitch 10mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- C: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	⊕	⊖	UNITS	mm
X: ±0.38	X: ±3°	Description:		SHEET SIZE	A4
XX: ±0.25	XX: ±2°	Pitch 10mm FFC Cable C Type		KLS P/N:	KLS17-FFC-10-XXP-LXXXC4/8
Draw by: Date		KLS ELECTRONIC CO., LTD.			
Check by: Date					
SCALE		SHEET			

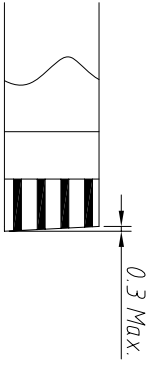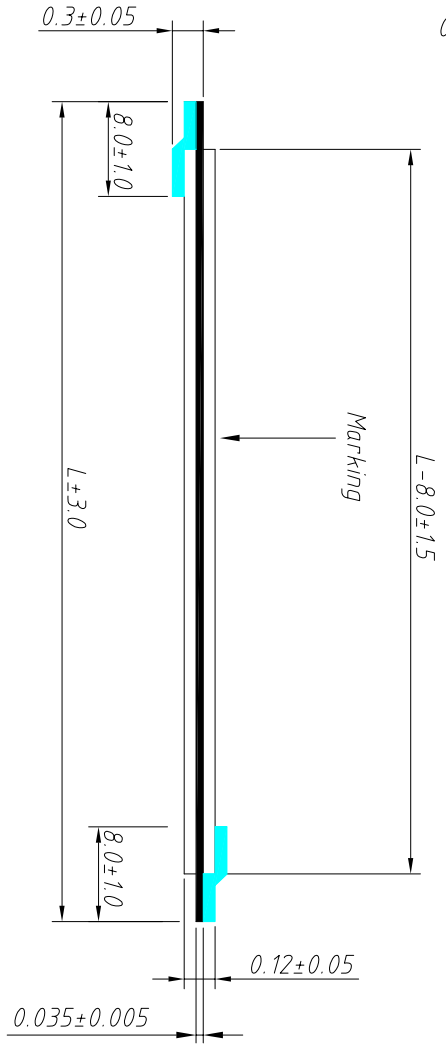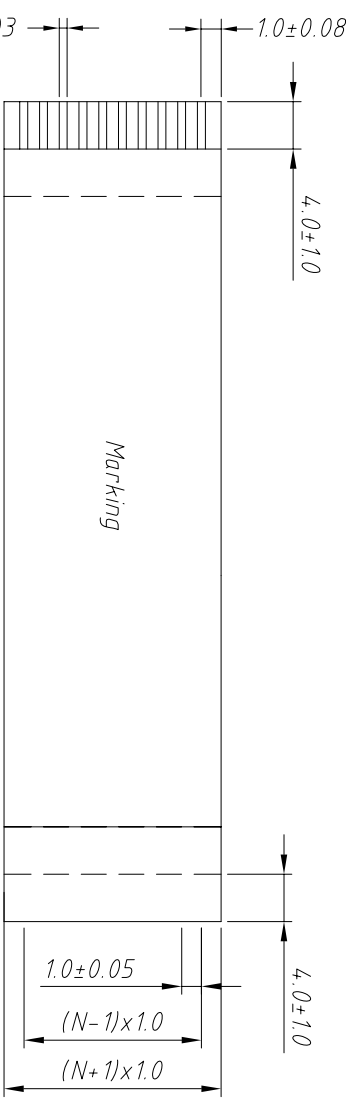

- Note
- 1-100% Testes No Short at Break Circuit
 - 2-Storage condition:
Temp: 15°C ~ 25°C
Humidity: 30 ~ 60RH%
 - 3-Conductor : 0.035×0.65mm
 - 4-Supporting Tape: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-1.0-XXP-LXXX D 4/8

- L: RoHS
- 1.0: Pitch 1.0mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- D: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	X: ±0.38	X: ±5°	X: ±3°	UNITS	mm	
XX: ±0.25		XX: ±2°		SHEET SIZE	A4	Pitch 1.0mm FFC Cable D Type
Draw by: Date		Check by: Date		KLS P/N:		
SCALE		SHEET		KLS17-FFC-1.0-XXP-LXXXD4/8		

KLS ELECTRONIC CO., LTD.