

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除非得到明确授权,否则禁止复制或传播本文件,否则将承担法律责任。本公司保留所有权利及专利,未经许可,不得复制或传播。

FOR-1755 Rev. 1.6

2

3

4



5

6

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

02P:Clasp on the left from this view


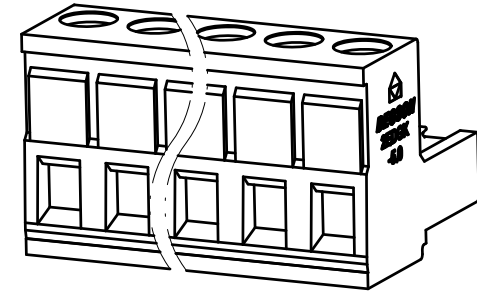
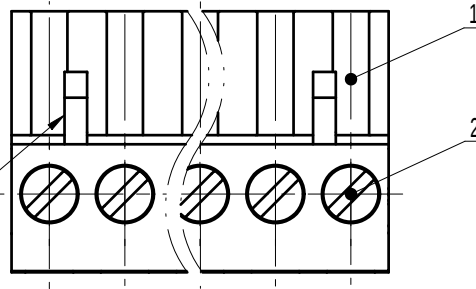


Note:

The A&Z(H) in the name means: A(H) and Z(H).

5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M2.5/Ni Plated
3	Cover	PA66	UL94V-0
2	Screw	Steel	M2.5/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28~12/ 1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

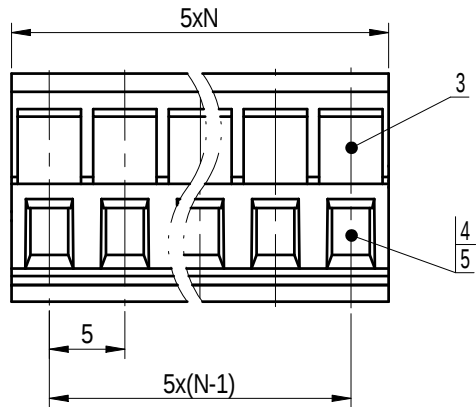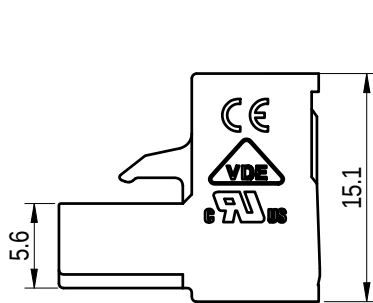

APPD: 兰春华 2022.11.01
CHKD: 龚耀志 2022.11.01

DRFT: 刘强 2022.11.01

MATERIAL:	SURFACE/COLOR:		
MAT NO./REV:	/ 00		
NAME	2EDGK-5.0-XXP-1Y-00A&Z(H)		
DRAWING NO.	200083612	TYPE	CUSTOMER DRAWING
DRAWING STATUS	已发布	SCALE	2:1
SHEET	1/1		

00			刘强	2022.11.01
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6