

| CH<br>FR | CH 1  | CH 2  | CH 3  | CH 4  | CH 5  | CH 6  | CH 7  | CH 8  |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| A        | 5865M | 5845M | 5825M | 5805M | 5785M | 5765M | 5745M | 5725M |
| B        | 5733M | 5752M | 5771M | 5790M | 5809M | 5828M | 5847M | 5866M |
| C        | 5705M | 5685M | 5665M | 5645M | 5885M | 5905M | 5925M | 5945M |
| D        | 5740M | 5760M | 5780M | 5800M | 5820M | 5840M | 5860M | 5880M |
| E        | 5362M | 5399M | 5436M | 5473M | 5510M | 5547M | 5584M | 5621M |
| R        | 5658M | 5695M | 5732M | 5769M | 5806M | 5843M | 5880M | 5917M |
| L        | 4990M | 5020M | 5050M | 5080M | 5110M | 5140M | 5170M | 5200M |


| OTG Single antenna receiving module                                                                                                                   |                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Weight : 19g(including antenna)                                                                                                                       | Working current : 5V/270mA             |
| Product size :52*31*6mm                                                                                                                               | Resolution : 720P                      |
| Scanning mode: Fully automatic                                                                                                                        | Connection mode: wired connection      |
| Interface :Micro-USB                                                                                                                                  | Frequency channel: Standard 56 channel |
| Mobile App: Support pocket . USB camera                                                                                                               | Mobile APP:Delay is about 100ms        |
| Use environment: open,no obstructionno interference1.27mm 4Pin                                                                                        |                                        |
| Note: High resolution may not be supported due to phone issues<br>The App can adjust: brightness, contrast, tone, saturation, backlight compensation; |                                        |

Long press the ② button ,  
Automatically search for channels



**SMA**

② Short press to switch Bands **A-L**

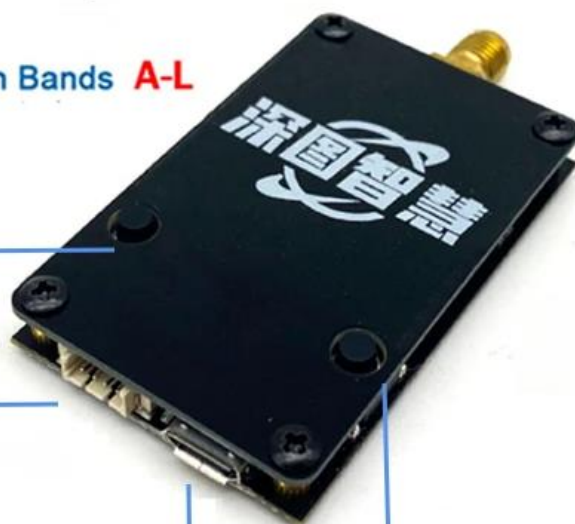

**Support external display**

White: Audio output  
Yellow: Video output  
Red: 5V  
Black: GND

① Short press to switch channels 1-8

**USB interface**




**Support external display**

White: Audio output  
Yellow: Video output  
Red: 5V  
Black: GND

**USB interface**



② Short press to switch Bands A-L

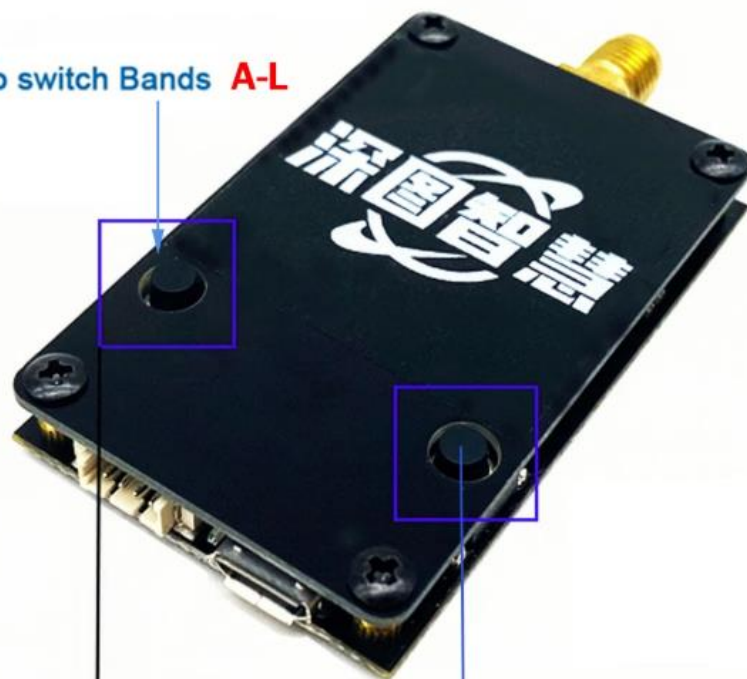

① Short press to switch channels 1-8

Long press the ② button ,  
Automatically search for channels