


## DESK TOP AC/DC ADAPTER ADPV12/16 series (30-40W)



### Features

- Universal AC input/Full range
- No load power consumption < 0.5W
- Meet energy star level IV(CEC)
- 2 pole AC inlet IEC-C8 or 3 pole AC inlet IEC320-C13/TU-333
- Class II power ((With earth pin for 3 pole , without earth pin for 2 pole)
- Protections : Short circuit /overload/over voltage/ over temp.
- Full enclosed plastic case
- Topology : Top switch circuit
- Approvals : UL/GS/CE/CB/CCC/PSE
- 1 year warranty

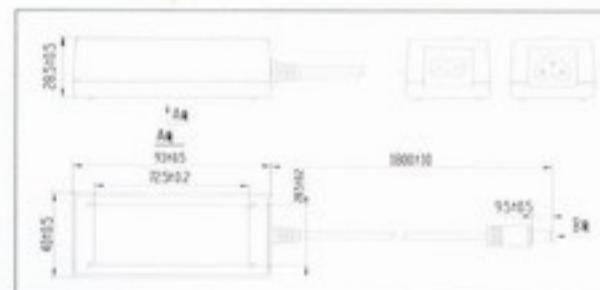


MODEL	INPUT	OUTPUT	DIMENSION(mm)
ADPV12-(5)	90-264VAC	5VDC@4A	93x40x28
ADPV12-(12)	90-264VAC	12VDC@2.5A	93x40x28
ADPV12-(24)	90-264VAC	24VDC@1.25A	93x40x28
ADPV16	90-264VAC	12VDC@3A	93x40x28
HGP-AD36A24	90-264VAC	24VDC@1.5A	93x40x28
HGP-AD40A48	90-264VAC	48VDC@0.83A	93x40x28

## ADPV58 series (40-50W)



### Features

- Universal AC input/Full range
- No load power consumption < 0.5W
- Meet energy star level IV(CEC)
- 3 pole AC inlet IEC320-14 or 2 pole AC inlet IEC-C8 .
- Class II power (With earth pin for 3 pole , without earth pin for 2 pole )
- Protections : Short circuit /overload/over voltage/ over temp.
- Topology : Top switch circuit
- Approvals : UL/CE/CCC
- 1 year warranty

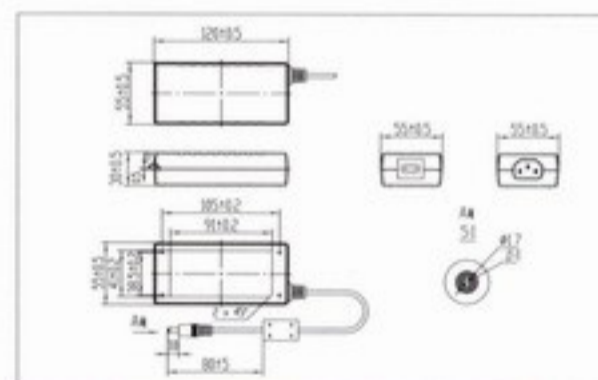

MODEL	INPUT	OUTPUT	DIMENSION(mm)
ADPV58A	90-264VAC	12VDC@4A	120x55x30
ADPV58B	90-264VAC	20VDC@2.4A	120x55x30
ADPV58C	90-264VAC	24VDC@2A	120x55x30
ADPV58D	90-264VAC	30VDC@1.6A	120x55x30
ADPV58E	90-264VAC	5VDC@5A	120x55x30
ADPV58F	90-264VAC	48VDC@1A	120x55x30
ADPV58G	90-264VAC	16VDC@3A	120x55x30
ADPV58K	90-264VAC	14VDC@3.5A	120x55x30