




GPS Antenna Specification

(Model: BY-GPS-07)

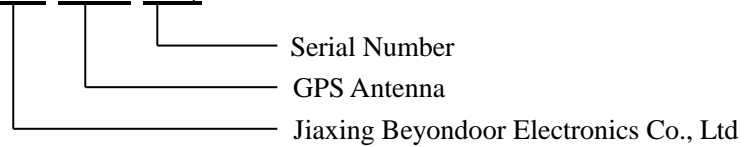

(I) Product Overview

(i) Dielectric Antenna

Center Frequency (MHz) : 1575.42±3

VSWR: 1.5:1

Bandwidth (MHz) : ±5

Impedance (Ω) : 50

Peak Gain >3dBi Based on 7cm×7cm ground plane

Gain Coverage >-4dBi at -90°<0 <+90°(over 75% Volume)

Polarization: RHCP

(ii) LNA/Filter

LNA Gain (Without cable) : 28 dBi Typical

Noise Figure (dB) : 1.5

Filter Out Band Attenuation (f0=1575.42 MHz)

7dB Min f0+/-20MHz ;

20dB Min f0+/-50MHz;

30dB Min f0+/-100MHz

VSWR <2.0

DC Voltage (V) : 2.7/3.0/3.3/3.0 to 5.0 etc.

DC Current (mA) : 10 Max

(iii) Mechanical

Weight (gram) <100

JIAXING BEYONDOOR ELECTRONICS CO.,LTD

Address: #101, Weiyi West Road, Dongzha Economic Zone ,Jiaxing 314000,Zhejiang,China

<http://www.beyondoor.com>

Tel:+86-573-82127009

Fax:+86-573-82052070

E-MAIL: sales@beyondoor.com or firstgps@hotmail.com

SKYPE NAME:beyondoorgps



Size (mm) : 37.2×34×11

Cable Length (m): 2,3 etc.

Connector: SMA/SMB/SMC/BNC/FME/TNC/MCX/MMCX etc.

Mounting: Magnetic base

Housing: Black

(iv) Environmental

Working Temp: -40℃~+85℃

Storage Temp: -45℃~+100℃

Vibration: Sine sweep 1g(0-p)10~50~10Hz each axis

Humidity: Humidity95%~100%RH

Weatherproof: 100%Waterproof

(II) Mechanical

