



Model:CZL611CD

Capacity:1-20KG


FEATURES:

Aluminum-alloy; Colorless anodized; Hermetically sealed with glue to IP65.


APPLICATIONS:

Electronic counting scales, kitchen scale etc.

LOAD INSTRUCTION:

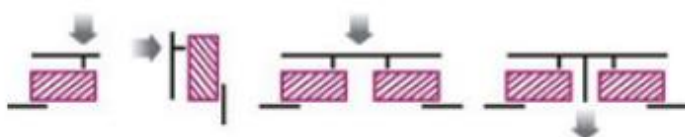

DIMENSIONS"

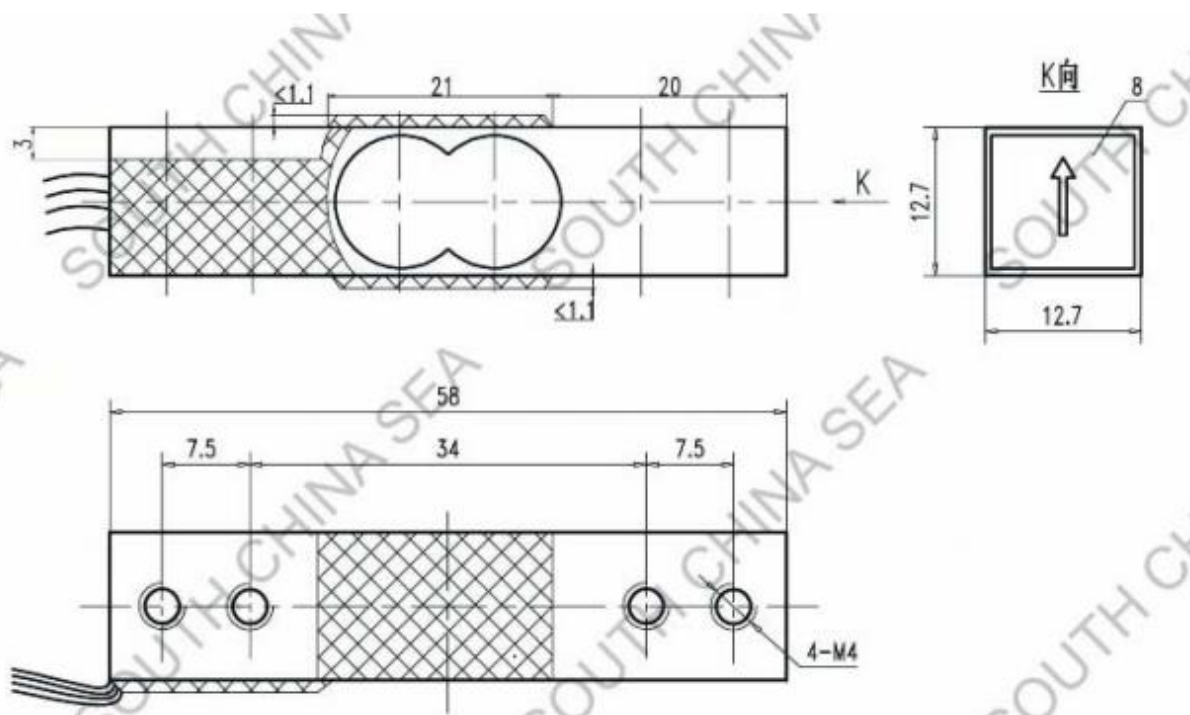

Precision: 0.05%F.S	Insulation resistance: $\geq 2000\text{M}\Omega(100\text{VDC})$
Rated output: $1.0 \pm 0.15\text{mV/V}$	Excitation voltage: 3VDC~10VDC
Non-linearity: 0.05%F.S	Compensated temp.range: $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
Hysteresis: 0.03%F.S	Use temp.range: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Repeat: 0.05%F.S	Temp.effect on zero: 0.03%F.S/ 10°C
Creep: 0.05%F.S/10min	Temp.effect on span: 0.02%F.S/ 10°C
Zero balance: $\pm 1\%$ F.S	Safe overload: 120%
Input resistance: $1000 \pm 10\Omega$	Ultimate overload: 150%
Output resistance: $1050 \pm 3\Omega$	Defense class: IP65
Wire Connection	
Red	(Input +)
White	(Output -)
Black	(Input -)
Green	(Output +)