


Password modification steps (default password 000)



Use a small tool to insert into the hole and press down.

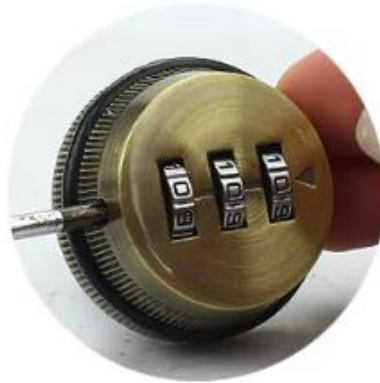

Change the password you want while pressing it.



After the modification is completed, you can release it (the password cannot be forgotten)



Measure the distance from the top of the cabinet to the center of the lock, determine the location of the opening, and open the hole



Insert the lock cylinder and tighten the nut to fix



Put on the snap ring and lock plate and fix the screw



The installation is complete