





# DEGSON ELECTRONICS CO., LTD.

## Product Specification

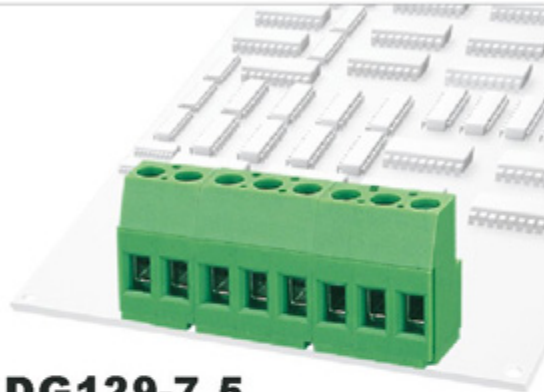

**DG129-5.0 DG129-7.5**  
**DG129-5.08 DG129-7.62**

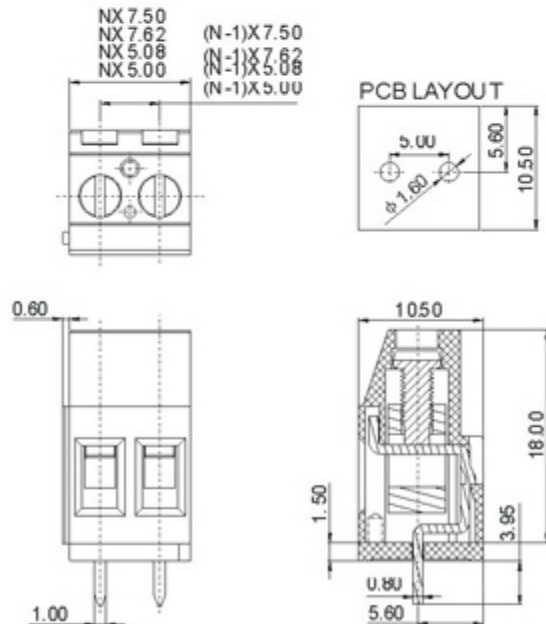


<b>Approval</b>		
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	250V, 450V
Rated current	20A	20A
Wire range	26-12AWG	0.5-2.5mm <sup>2</sup>
With standing voltage	AC2000V/1Min	

<b>Mechanical</b>	
Torque	0.5Nm(4.4Lb-In.)
Ambient temperature	-40°C~+105°C
Strip length	7mm

<b>Dimensions</b>	
Pitch	5.0mm(.197") 5.08mm(.200") 7.5mm(.295") 7.62mm(.300")
Poles	2P,3P-24P

<b>Material</b>	
Housing	PA66, UL94V-0
Screws	M3, steel, Cr <sup>3+</sup> Zn plated
Pin header	Brass, Tin plated
Cage	Brass, Ni plated

### HOW TO ORDER

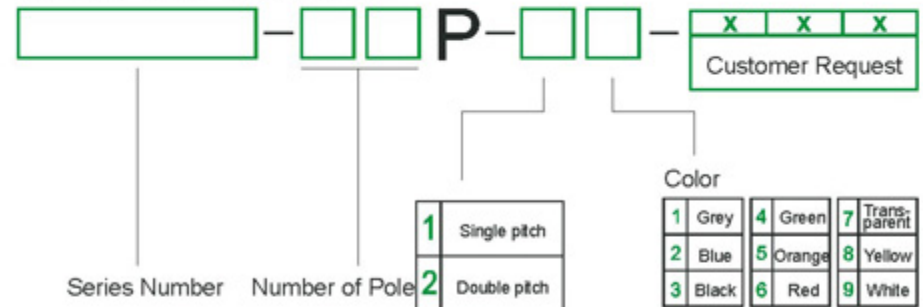

 	DEGSON ELECTRONICS CO., LTD. NAME <b>DG129-5.0 DG129-7.5</b> <b>DG129-5.08 DG129-7.62</b>
------	---