

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、名称权、商号权、域名权、其他知识产权等合法权益外，本公司保留对涉及发明、实用新型、外观设计、发明专利、软件著作权、商标、名称权、商号权、域名权、其他知识产权等合法权益的所有权利。

FOR-1755 Rev.1.7

2






3

4

5

6

PCB LAYOUT

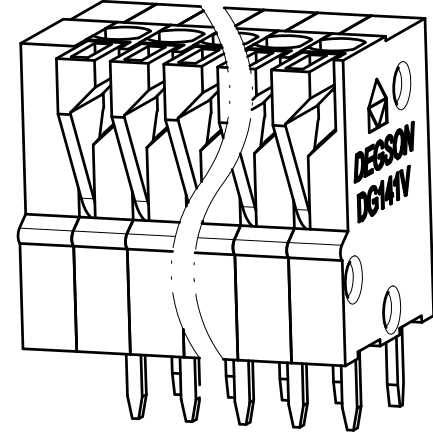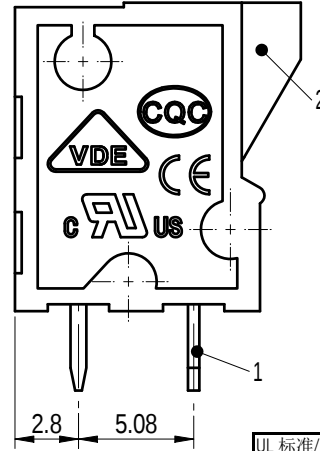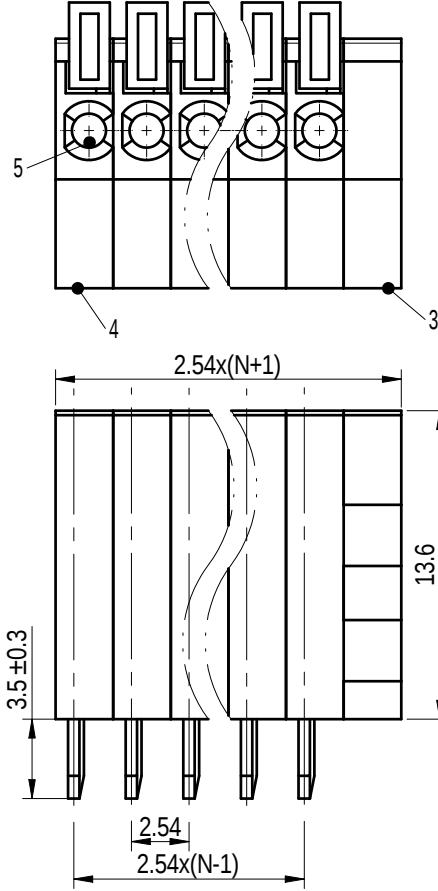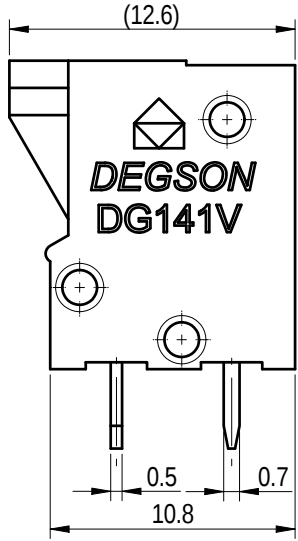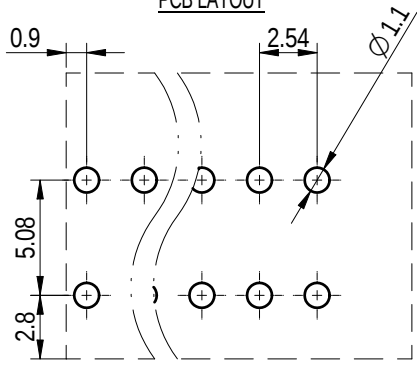

未注公差/General tolerances (mm)														0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Housing	PA66	UL94V-0
3	Cover	PA66	UL94V-0
2	Button	PA66	UL94V-0
1	Pin header	Copper alloy	Sn Plated

UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)		B	C
		150/2	150/2
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	130/6
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		AC1250	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		24~20/0.2~1.0	
间距/Pitch(mm)/线数范围/Poles		2.54/N=01~32P	
剥线长度/Stripping length(mm)		11	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

		MATERIAL: -		SURFACE/COLOR:		
MAT NO./REV: -		/ 00		MAT STATUS: 批量		
APPD: 兰春华	2022.08.31	NAME DG141V-2.54-XXP-1Y-00A&Z(H)				
CHKD: 陈招	2022.08.31					
DRFT: 袁路易	2022.08.30	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4	 (inch)	200074890	CUSTOMER DRAWING	已发布	3:1	1/1

00			袁路易	2022.08.30
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6