






DEGSON ELECTRONICS CO., LTD.

Product Specification



DG28H-A

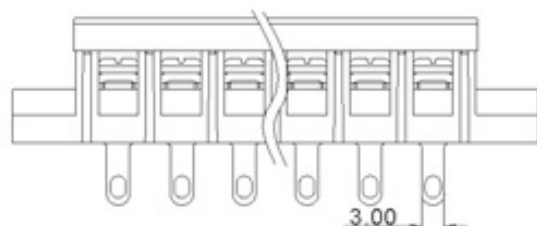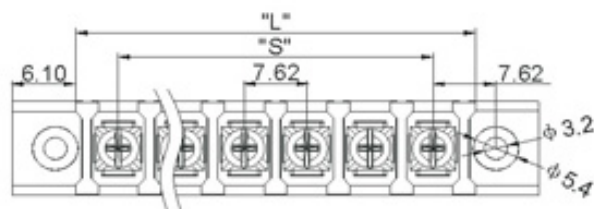

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.29	25.91	33.53	41.15	48.77	56.39	64.01	71.63	79.25	86.87	94.49	102.11	109.73	117.35
S(mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	124.97	132.59	140.21	147.83	155.45	163.07	170.69	178.31	185.93	193.55	201.17			
S(mm)	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	182.88	190.50			

Approval



Electrical

Standard

UL

IEC

Rated voltage

300V

250V

Rated current

15A

24A

Wire range

22-14AWG

2.5mm²

With standing voltage

AC2000V/1Min

Insulation Resistance

500MΩ/DC500V

Mechanical

Max. Torque Value

0.5Nm 4.4Lb.in

Ambient temperature

-40°C~+105°C

Dimensions

Pitch

7.62mm(.300")

Poles

2P-24P

Material

Housing

PA66+23%GF, UL94V-0

Terminal

Brass, 0.8t, Tin Plated

Screws

Steel, M3 Ni Plated

HOW TO ORDER

DG28H-A



P



Customer Request

Series Number

Number of Poles

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans-parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



DEGSON ELECTRONICS CO., LTD.

NAME

DG28H-A