
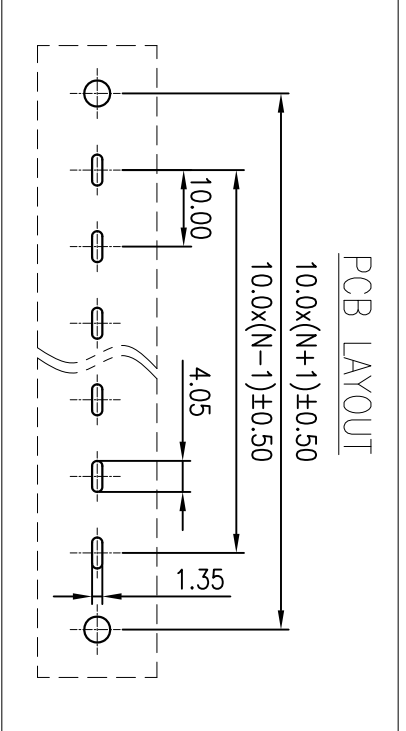

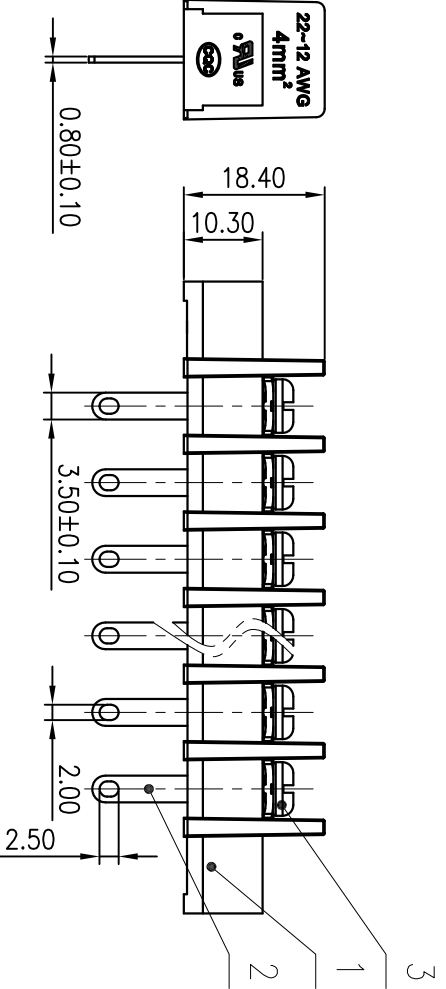


公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

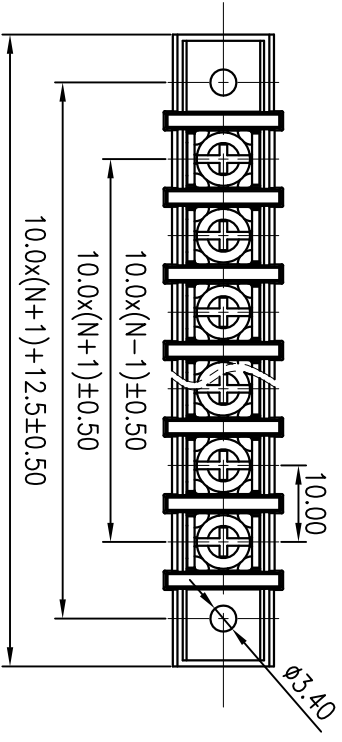

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/Rated Voltage(V)	Current(A)	300/20	300/20	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)	500/32	600/32	1000/32	
额定冲击电压(KV)/Rate Impulse Voltage(KV)	4	6	6	
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53			
线径范围(软线)/Wire Range(Flexible)(AWG)	22~12			
间距/Pitch(mm)/线数范围/Poles	10.00/N=02~24P			
剥线长度/Stripping length(mm)	9			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL: /  
SURFACE: /

MAT NO.: /  
STATUS: /

APPD: /  
CHKD: /

DRFT: WU NK 2020.5.26  
DRAWING NO.: DG55H-C04

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**宁波高松电子有限公司**

TYPE: CUSTOMER DRAWING  
SCALE: 1:1

REV T0  
SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE