


公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.45	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±3.15	±4.00	±5.00
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.45	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±3.15	±4.00	±5.00

please refer to the 3D model, for those unmarked dimensions

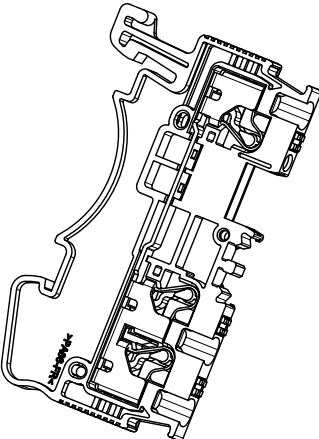

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/15	/	/
EC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	500/17.5	/	/
额定冲击电压/电压/Rate Impulse Voltage(KV)	6.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	/	/	/
线径范围 (导线和接线) /Wire Range(frigid and flexible)(mm <sup>2</sup> /AWG)	UL14~32 conductor cross section flexible with ferrule with plastic sleeve max.5mm(stripping length: 8mm)/26~16,KSXL		
间距/Pitch(mm) /线数范围/Poles	3.5/N=01P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: LI GL 2020.10.27	NAME: DS1.5-TW-01P-1Y-00A&Z(H)
CHKD: Mg EK 2020.10.27	DRAWING NO.: DS1.5-TW-C01
DFT: Mg EK 2020.10.27	TYPE: CUSTOMER DRAWING
SIZE: A4	SCALE: 2:1
	SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66+GF%	UL94V-0
1		PA66	UL94V-0

DEGSON® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD