

/ Product parameters /

DC CIRCUIT BREAKER


Standard	IEC60947-2	Max. fuse that can be connected to	100AgL(>10kA)
Characteristic curve	C	Selective grade	3
Working ambient temperature	-5°C~+40°C	Enclosed protective class	IP20
Electrical life	≥8000 times	Mechanical life	≥20000 times
Rated current	6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A		
Rated Breaking capacity	6KA		



1P 250VDC





2P 550VDC

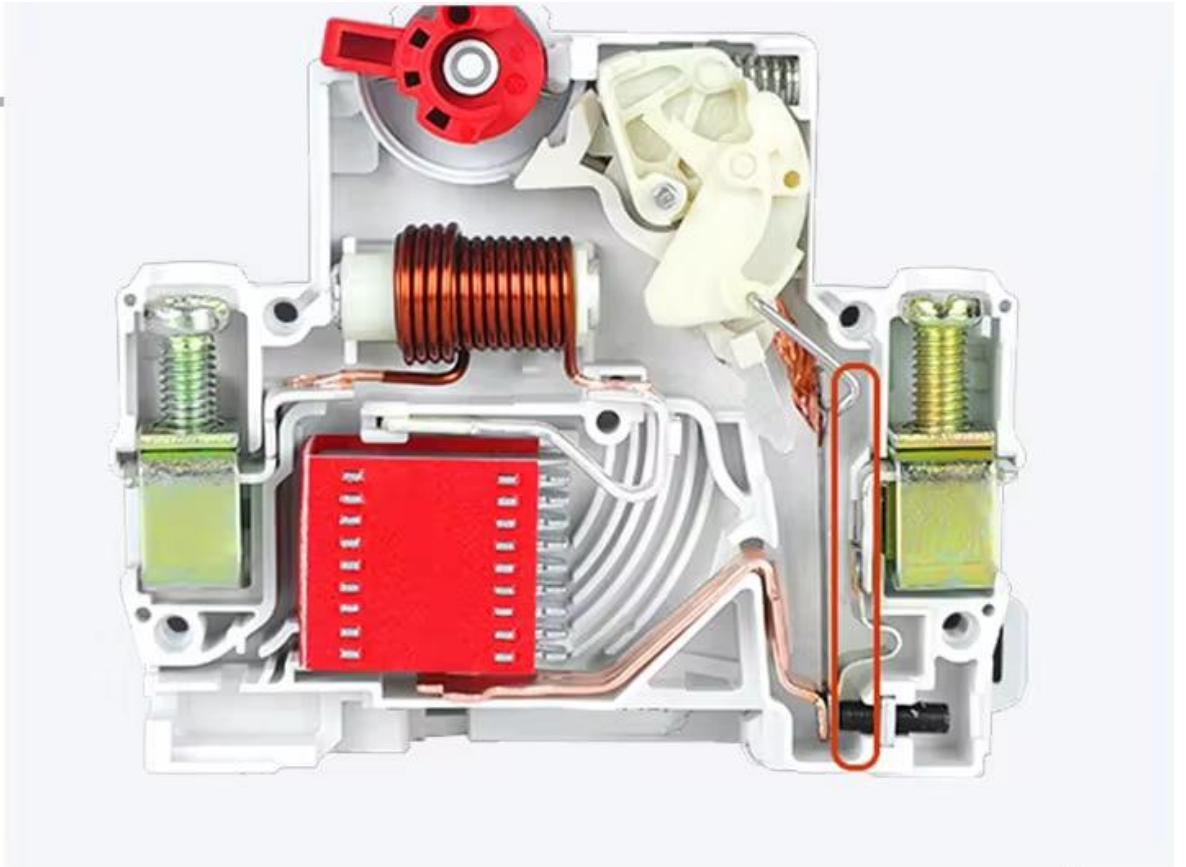


Arc-extinguishing room, swift arc breaking

/ Product dimensions /

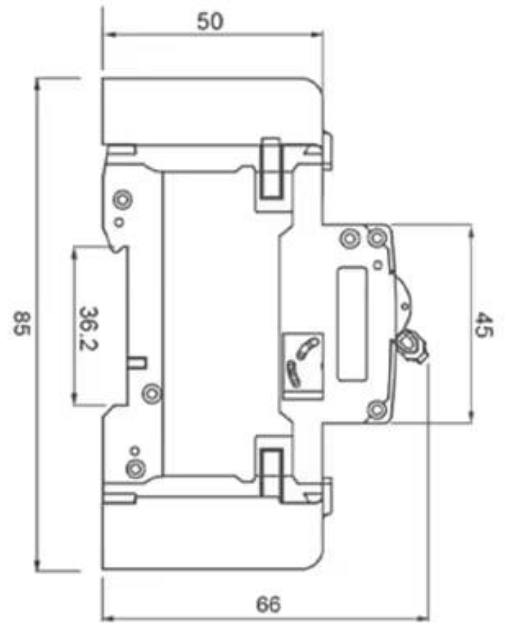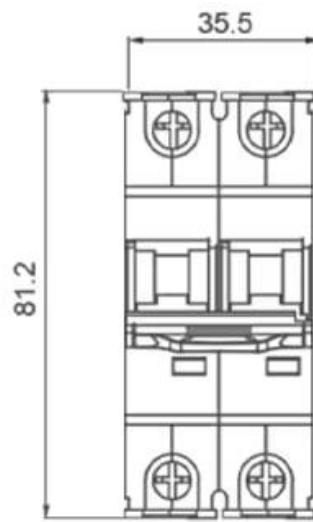

/ Wiring Diagram /

1P

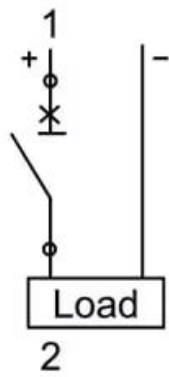

2P

