

Primary Lithium Battery Technology Specification

Customer _____

Part name Primary Lithium Battery

Model No ER14250 1200mAh 3.6V

Serial No _____

Produce No _____

Approved by		Drafted by	Xiaojun nie
Checked by		Signed by	Wenfei liang
Prepared by		Date	2021-03-12

Company address: 4th Building,Meitai Technology Park,Guanguang
Road,Longhua,Shenzhen,China

(Tel) : +86-755-86670672

(Fax) : +86-755-86670609

E-mail: sale5@pkcell.net sale5@pkcell.net

Website: <http://www.pkcell.net> <http://www.pkcell.com>

1.Scope

This specification is applied to the reference battery in this Specification and manufactured by ShenZhen PKCELL Battery Co., Ltd.

2.Product Specification (23±2°C)

No.	Item	General Parameter	Remark
1	Nominal Capacity	1200mAh	Discharge at 0.5mA to 2.0V
2	Rated Voltage	3.6V	Mean Operation Voltage
3	Max Constant Discharge Current	20mA	—
4	Max Pulse Discharge Current	45mA	—
6	Operating temperature range	-55~85°C	—
7	Avaliable Terminations	S :Standard Terminations	Special Termination are avaliable upon request ⁻³⁻
		T : Solder Tabs	
		P :Axial Pins	

3. Benefits

- High energy density, High voltage, stable during most of the application's lifetime
- Wide range of operating temperature
- Long self-dischager rate (≤1% per year during Storage)
- Long storage life (10 years under room temperature)


4. Main application

- Intelligent instrument and meter
- Memory and standby power, Alarms and security devices
- Automotive electronics, Electronic toll collection
- Millitary devices

5. Warning

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not use the battery beyond the permitted temperature range.

6. Dimension:

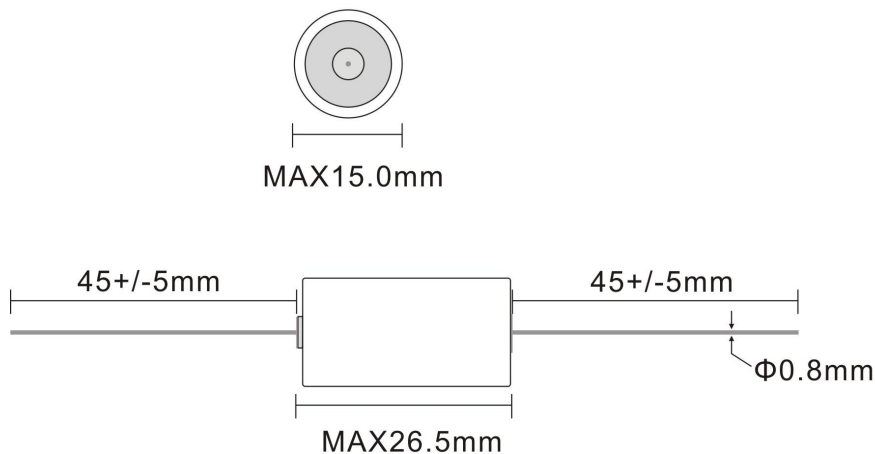

- 4 -

.....END.....