





Model: Eg003pb/Eg003Li

# HOW TO CHARGE IT?

SOCKET CHARGING

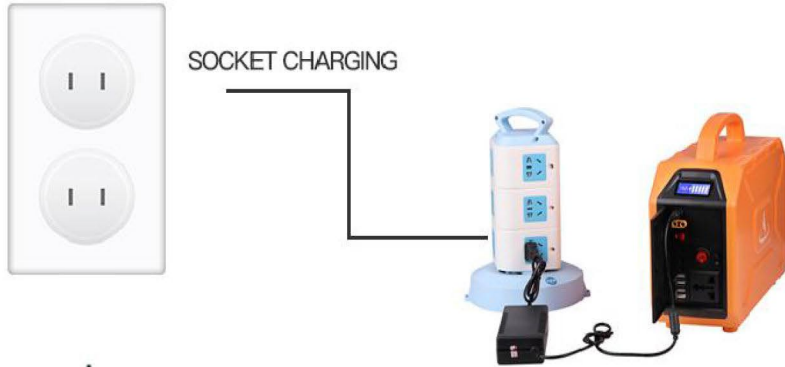

SOLAR ENERGY CHARGING

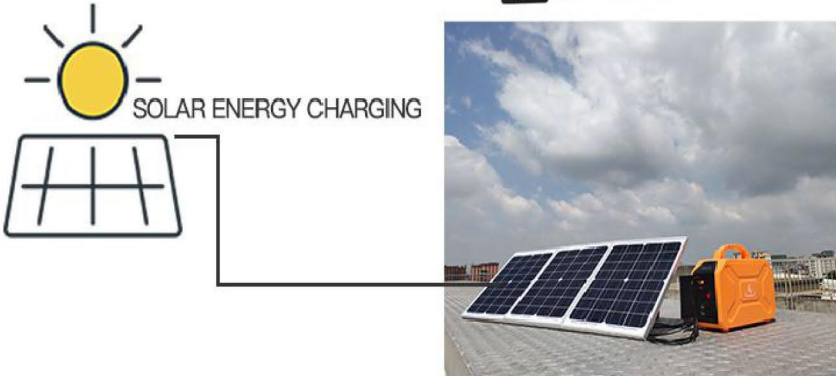

## Accessories



## INTERFACE DESCRIPTION



# 200W Portable Power Station



Charger Charging



Solar Panel Charging



Outdoor Camping Power Supply



Eg003 Technical Parameter Table		
Model	Eg003pb	Eg003Li
Rated Power	200W	
AC Output Voltage	220V±15%/110V±15%(To be customized)	
AC Output Frequency	50Hz±2Hz/60Hz±2Hz(To be customized)	
Output Waveform	Modified Sine Wave	
Conversion Efficiency	Maximum Value>90%	
Solar Panel Optional Specifications	16V 60~100W(Max)	
Charging Interface	External Charger Port and Solar Panel Charging Port-1PCS	
AC Output Socket	Universal Socket-1PCS	
DC Output Voltage	USB DC5.1V1A-2PCS; USB DC5.1V2.1A-2PCS; DC12V3A-3PCS 12V Small Car Ignition Port-1PCS	
Backup Time (When Fully Charged)		
Battery Capacity	12V30AH	280.8Wh
1 PCS 12V5W LED Light	62 hours	64 hours
1 PCS 15W Digital Product	20.8 hours	22 hours
1 PCS 40W AC Fan	6 hours	6.2 hours
1 PCS 50W Laptop	4.1 hours	4.8 hours
1 PCS 55-inch 110W LCD TV	1.8 hours	2.2 hours
Built-in Battery		
Battery Type	Lead-Acid Maintenance-Free Battery	Lithium Battery Pack
Charging Current	3A Typical, 6A Maximum	
Charging Time	90% battery capacity in 10 hours after full discharge	
LCD Display	Battery Capacity, Battery Voltage	
LED Display Light	USB Output Status, AC Charging Status	
Heat Dissipation	Intelligent Temperature Control Cooling Fan	
Noise	1 Meter Distance < 45 dB	
Protection Functions	Low Voltage, Over Voltage, Over Load, Over Temperature, Short Circuit	
Product Features	<ol style="list-style-type: none"> <li>1. DC/AC fully isolated.</li> <li>2. High frequency design, small size.</li> <li>3. Pure copper transformer.</li> <li>4. CPU control all-round protection.</li> <li>5. High efficiency DC/AC inverter, low no-load loss.</li> <li>6. AC output and DC output have independent switch function.</li> </ol>	
Environmental Characteristics		
Operating Ambient Temperature	-10~40℃	
Operating Environment Humidity	10~85%	
Storage Ambient Temperature	-20~70℃ Without Condensation	
Storage Environment Humidity	5~90%	
Structural Characteristics	ABS Fireproof Enclosure	
Net Weight(kg)	9.1	3.9
Product Size W*D*H(mm)	310*120*200	