



Model: Eg006Li

HOW TO CHARGE IT?



SOCKET CHARGING



SOLAR ENERGY CHARGING




Accessories



1000W Portable Power Station



Charger Charging

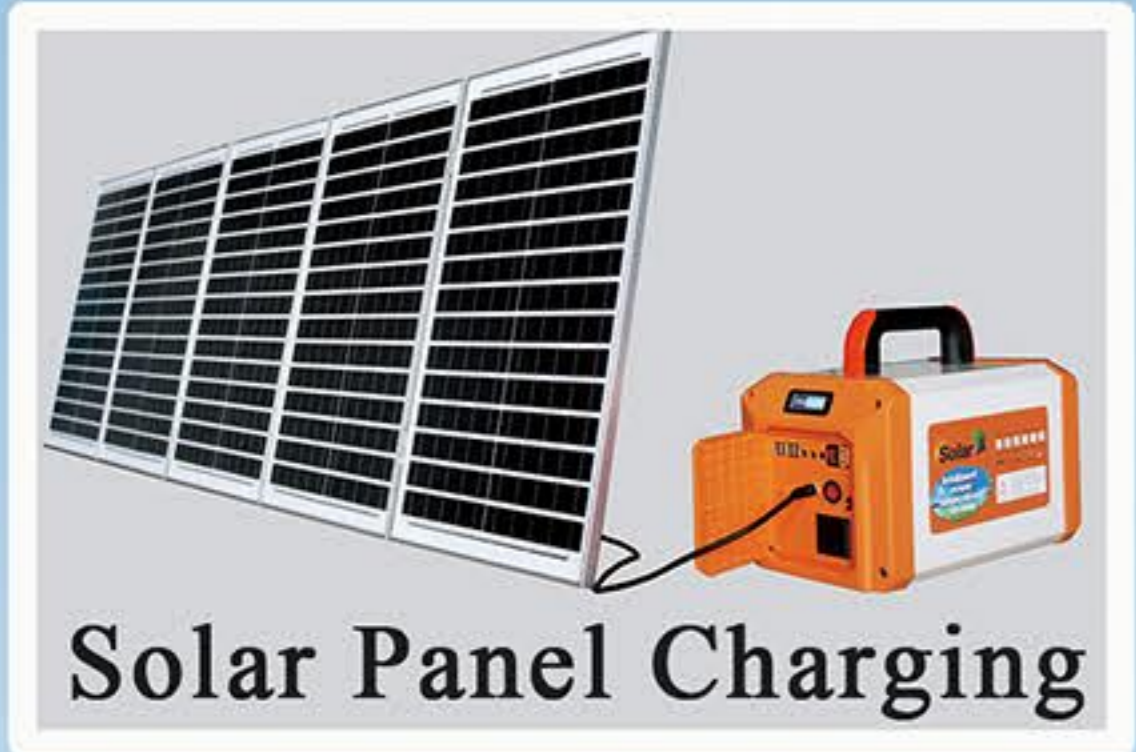

Solar Panel Charging



Outdoor Camping Power Supply



Eg006Li Technical Parameter Table	
Model	Eg006Li
Rated Power	1000W
Output Waveform	Pure Sine Wave
AC Output Voltage	220V±15%/110V±15%(To be customized)
AC Output Frequency	50Hz±0.5Hz/60Hz±0.5Hz(To be customized)
Conversion Efficiency	Maximum Value>90%
Solar Panel Optional Specifications	14V~40V 150~200W(max)
Charging Interface	External Charger Port and Solar Panel Charging Port-1PCS
AC Output Socket	American Standard/European Standard/Universal optional-1PCS
DC Output Voltage	USB DC5.1V1A-2PCS; USB DC5.1V2.1A-2PCS; DC12V3A-3PCS 12V Small Car Ignition Port-1PCS
Backup Time (When Fully Charged)	
Battery Capacity	888Wh
1 PCS 40W AC Fan	18.9 hours
1 PCS 50W Laptop	15.1 hours
1 PCS 55-inch 110W LCD TV	6.9 hours
1 PCS 180W Desktop Computer	4.2 hours
Built-in Battery	
Battery Type	Lithium Battery Pack
AC Adapter Specifications	12.6V 10A
Charging Current	10A Maximum
Charging Time	90% battery capacity in 10 hours after full discharge
LCD Display	Battery Capacity, Battery Voltage
LED Display Light	USB Output Status, AC Charging Status
Heat Dissipation	Intelligent Temperature Control Cooling Fan
Noise	1 Meter Distance < 45 dB
Protection Functions	Low Voltage, Over Voltage, Over Load, Over Temperature, Short Circuit
Product Features	<ol style="list-style-type: none"> 1. DC/AC complete isolation. 2. High frequency design, small size. 3. Pure copper transformer, high efficiency, low no-load loss. 4. Microprocessor, digital control, all-round protection. 5. Built-in solar charger, intelligent charge and discharge management. 6. AC output and DC output have independent switch function.
Environmental Characteristics	
Operating Ambient Temperature	-10~40℃
Operating Environment Humidity	10~85%
Storage Ambient Temperature	-20~70℃ Without Condensation
Storage Environment Humidity	5~90%
Structural Characteristics	ABS Fireproof Enclosure
Net Weight(kg)	10
Product Size W*D*H(mm)	355*200*212