


3 in 1 LED Controller (WiFi + 2.4G)

One controller = triple function (RGB / RGBW / RGB+CCT)
Decrease the model number of your stock, manage stock easily




Product Parameters

- **Product Name: 3 in 1 LED Controller (WiFi+2.4G)**
- Model No.: FUT037W+
- Working Voltage: DC12~24V
- Output: 6A/Channel
- Total Output: Max 12A
- WiFi Standard: IEEE 802.11b/g/n 2.4GHz
- Bluetooth Protocol: Bluetooth 4.2 (low power consumption)
- RF: 2.4GHz
- Remote Control Distance: 30m
- Working Temperature: -10~40°C

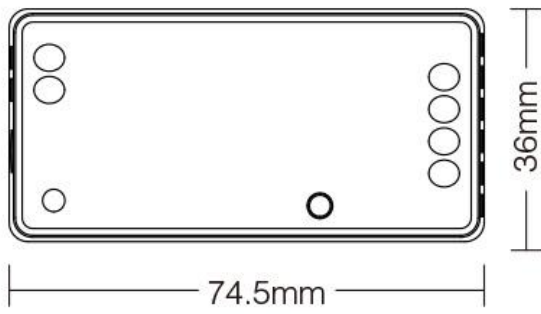

1PC/BOX
G.W.: 0.041KGS

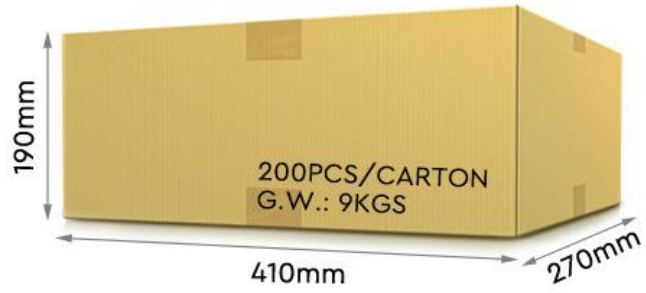

16 Millions of colors to choose



Color temperature 2700K~6500K



Saturation control




Stepless dimming brightness



Frequency switched High(16KHz) / Low(250Hz)

Compatible with
Mi-Light / MiBoxer
2.4GHz series remote

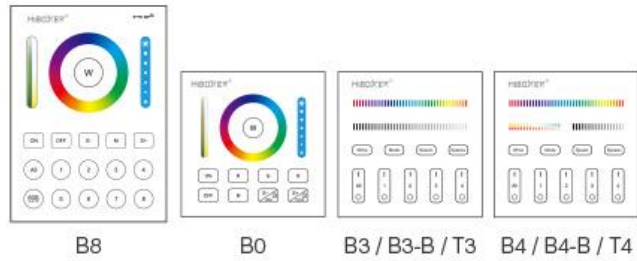

Switching 3 output mode via one button

RGB / RGBW / RGB+CCT



[Tuya Smart] app control

No need 2.4GHz gateway to experience more functions



Timing setting



Music rhythm



Tap-to-Run & automation



Do not disturb mode



Scene customization



Device sharing



Support third party voice control

which can control ON/OFF, brightness, etc. through voice



Signal transmitting


One LED controller can transmit the signals from the remote control to another LED controller within 30m, as long as there is a LED controller within 30m, the remote control distance can be limitless.

Modes synchronization

Different LED controller can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.



2.4G Remote

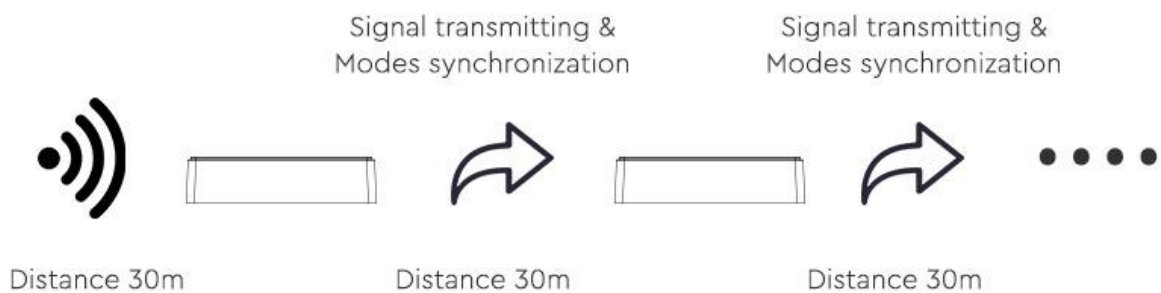


MIBOXER® | Mi·Light
Subordinate New Brand
3 in 1 LED Controller (WiFi+2.4G)

Model No.: FUT037W+
Input Voltage: DC12V~24V
Output: 6A/Channel
Total Output: Max 12A
2.4G Control Distance: 30m
Working Temp.: -10~40°C

Indicator Output Mode	
Red	RGB
Green	RGBW
Blue	RGB+CCT

Press "SET" button 1 time to activate linking mode
Press "SET" button continuously to change output mode
Long press "SET" button 3 seconds to activate WiFi pairing mode while indicator flashes quickly


SET

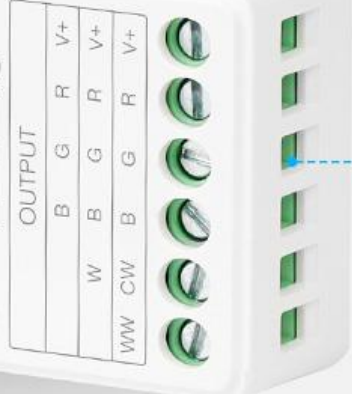

LED light interface

Classic PC material
high quality

Two power interfaces
Wiring port / DC5.5*2.1

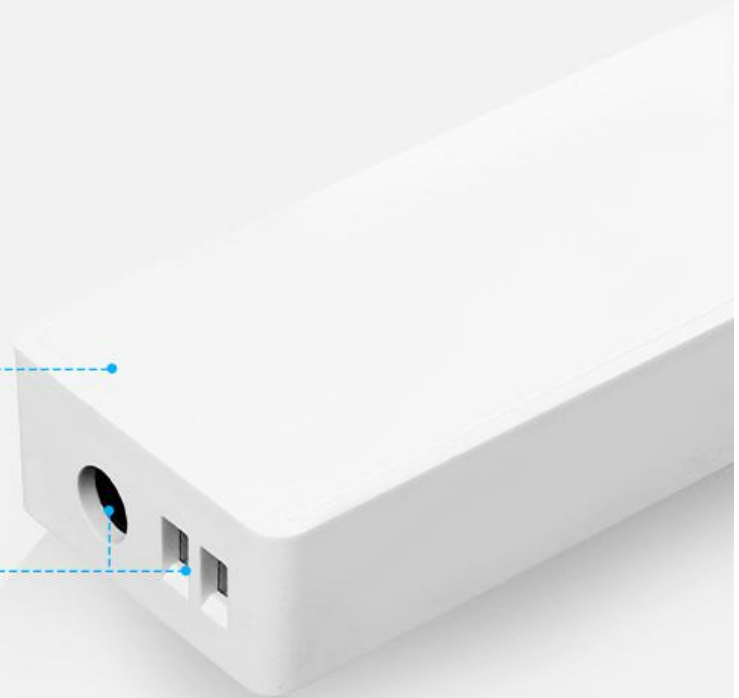

MIBOXER® | Mi·Light
Subordinate New Brand
3 in 1 LED Controller (WiFi+2.4G)

Model No.: FUT037W+
Input Voltage: DC12V~24V
Output: 6A/Channel
Total Output: Max 12A
2.4G Control Distance: 30m
Working Temp.: -10~40°C

Indicator Output Mode	
Red	RGB
Green	RGBW
Blue	RGB+CCT

• Press "SET" button 1 time to activate linking mode
• Press "SET" button continuously to change output mode
• Long press "SET" button 3 seconds to activate WiFi pairing mode while indicator flashes quickly

SET



SET button

- Press "SET" button 1 time to activate linking mode
- Press "SET" button continuously to change output mode
- Long press "SET" button 3 seconds to activate WiFi pairing mode while indicator flashes quickly