


METAL CASE SWITCHING POWER SUPPLY

GK-150/200 series (150/200W with single output, dual output & triple output)

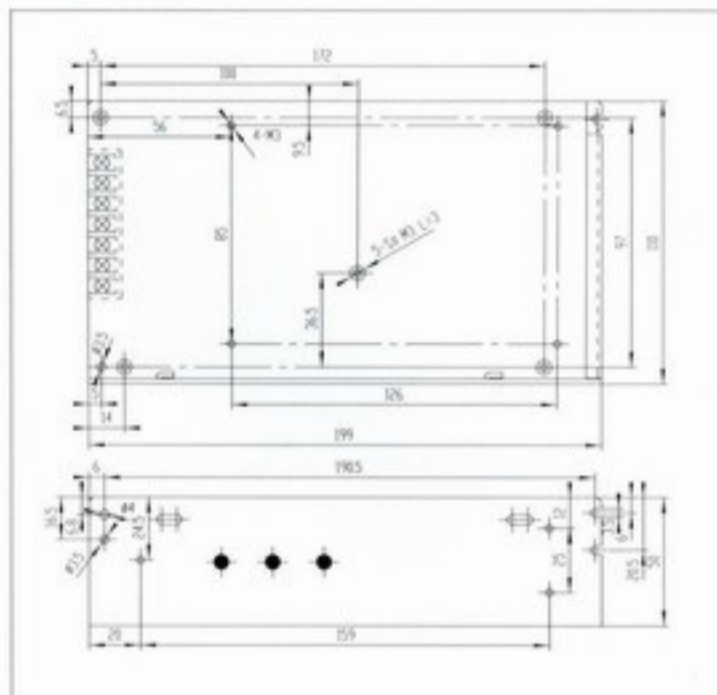

Features

- AC input range selected by switch
- Class II power
- Protections : Short circuit /overload/over voltage/ over temp.
- Cooling by free air convection
- 100% full load burn-in test
- Approvals : UL/CE/CCC
- 1 year warranty

MODEL	INPUT	DC OUTPUT	DIMENSION(mm)
GK-150-5	85-132Vac,185-264Vac	5V 30A	199x110x50
GK-150-12	85-132Vac,185-264Vac	12V 12.5A	199x110x50
GK-150-24	85-132Vac,185-264Vac	24V 6.5A	199x110x50
GK-150-48	85-132Vac,185-264Vac	48V 3.2A	199x110x50
GK-150D-A	85-132Vac,185-264Vac	5V/12A & 12V/5A	199x110x50
GK-150D-B	85-132Vac,185-264Vac	5V/10A & 24V/4A	199x110x50
GK-150D-C	85-132Vac,185-264Vac	12V/11.5A & 5V/3A	199x110x50
GK-150D-D	85-132Vac,185-264Vac	24V/5.8A & 5V/3A	199x110x50
GK-150D-E	85-132Vac,185-264Vac	12V/10A & 6V/5A	199x110x50
GK-150D-F	85-132Vac,185-264Vac	24V/4A & 12V/4A	199x110x50
GK-150T-A	85-132Vac,185-264Vac	5V/15A & 12V/2A & -12V/2A	199x110x50
GK-150T-B	85-132Vac,185-264Vac	12V/10A & 5V/2A & -5V/2A	199x110x50
GK-150T-C	85-132Vac,185-264Vac	24V/5A & 5V/2A & -5V/2A	199x110x50
GK-200-5	85-132Vac,185-264Vac	5V 40A	199x110x50
GK-200-12	85-132Vac,185-264Vac	12V 16.7A	199x110x50
GK-200-24	85-132Vac,185-264Vac	24V 8.4A	199x110x50
GK-200-48	85-132Vac,185-264Vac	48V 4.2A	199x110x50