

GK50A5 (5V/8A)

SPECIAL FEATURES	
※ Universal AC input	※ High efficiency
※ Low output ripple	※ Built-in EMI filter
※ Short circuit protection	※ Over load protection

INPUT	
Input range	85 ~ 264 VAC
Input frequency	47 ~ 63 Hz
Inrush current	< 20A at 115VAC; < 40A at 230VAC; cold start at 25°C
Input current	2.5A Max
Leakage current	< 1.5 mA at 50/60 Hz 264VAC input

OUTPUT	
Rated output power	40 Watts
Output voltage	5 V $\pm$ 4% (4.80V $\leq$ V _{output} $\leq$ 5.30V)
Output current	8A
Output load efficiency	$\geq$ 80% at 100VAC full load; $\geq$ 80% at 264VAC full load
Max power	40 Watts for convection
Adjustment range	fixed
Hold-up time	30 ms at full load and 230 VAC nominal line
OL protection	96% to 104% above peak rating
Ripple & noise	$\leq$ 60mV at rated load


ISOLATION	
Input to output	AC3.0 KV/1 min.
SAFETY APPROVAL	
UL CCC CE	

ENVIRONMENTAL	
Operating temp.	0 °C to 50 °C ambient derate each output at 4.0% per degree from 50 °C to 60 °C
Storage temp.	- 40 °C to 85 °C
Operating humidity	5% to 95% (non-condensing)
MTBF	100,000 hours at full load and 25 °C ambient conditions (demonstrated)
Size	120×60×30

Special specification can be provided on customer' s request

OUTSIDE FRAME DRAWING

HGPOWER®

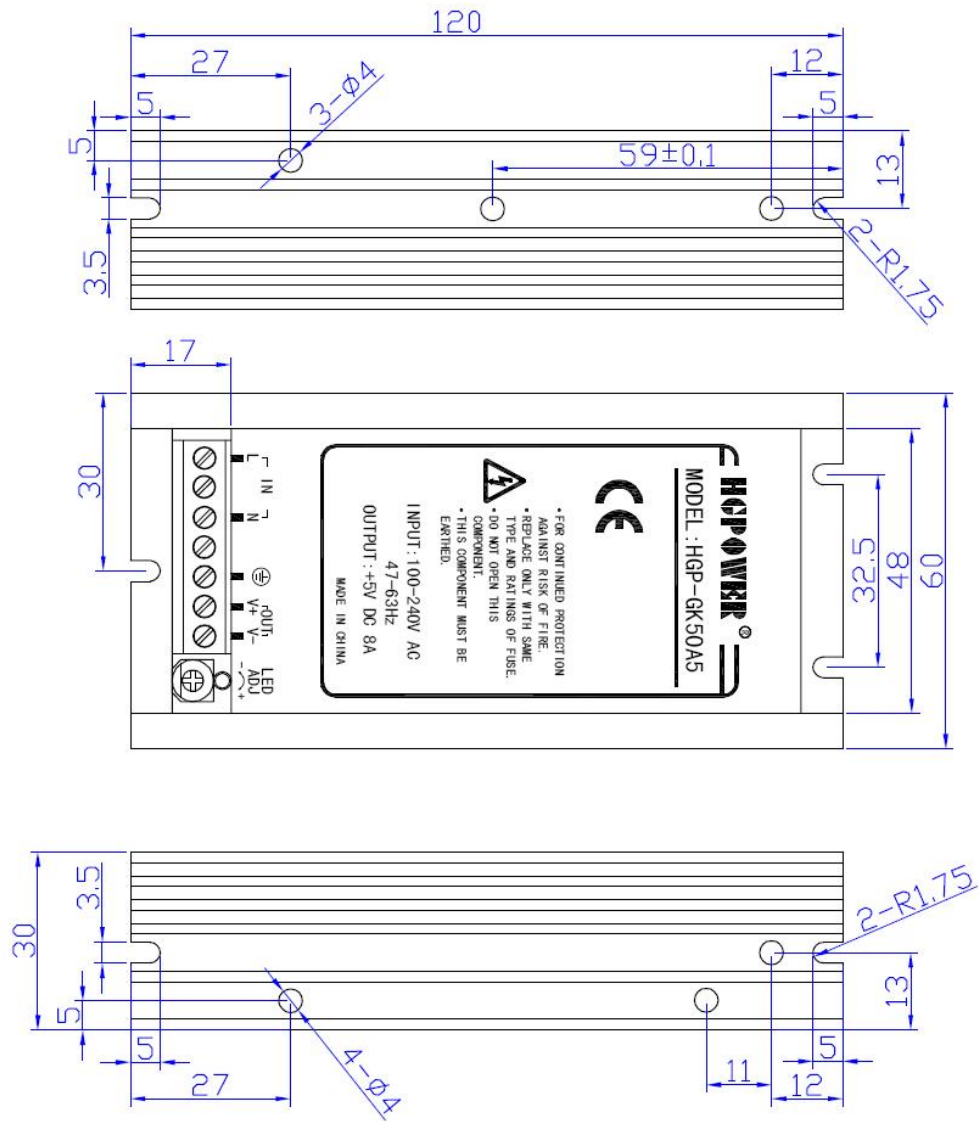

DESIGN	fankai	HGP-GK50A5					HGPOWER					
CHECK												
DATE		REJIGGER	AMOUNT	CHANGE NUM.	SIGN	DATE	MATERIAL: ALUMINUM					
STANDARDIZATION							SCALE	MARK	PAGE	TOTAL	WEIGHT	RATE
APPROVE												