


### 基本参数(SPEC):



- 1.额定范围Rating: 50mA 12VDC
- 2.接触电阻Contact Resistance : 50mΩ max(initial)
- 3.绝缘电阻Insulation Resistance: 100MΩ ( minDC 250V)
- 4.耐压强度Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.机械寿命Electrically Life:50,000cycles
- 6.环境温度Environment temperature: -25℃-70℃
- 7.操作力度Operating Force: 180/250(±30gf)

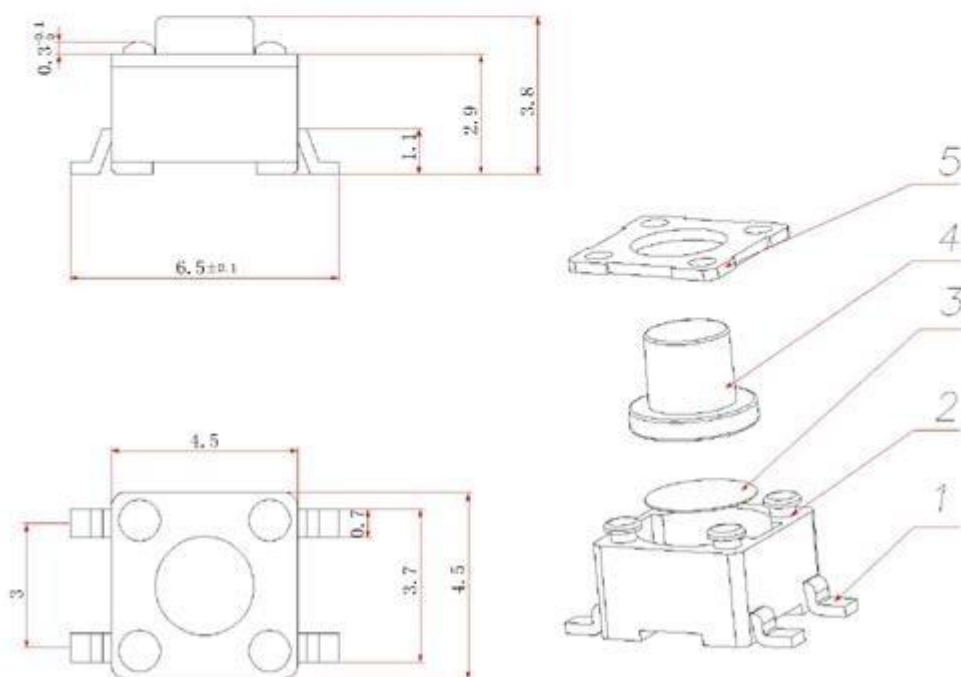

Type:	Snap-in	Operating force:	0.98N
Operating Direction:	Top Push	Travel:	0.25mm
Operating Life:	Over 100,000 cycles	Initial contact resistance:	100mΩ max.
Stem color:	Black	Operating Temperature:	-40℃~+90℃
Stem height:	H=3.8,4.3,4.8,5.0,7.0mm	Series type:	SMD
Rating (max.):	50mA 12V DC	Rating (min.):	10μA 1V DC