
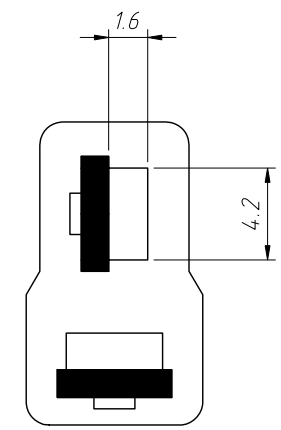
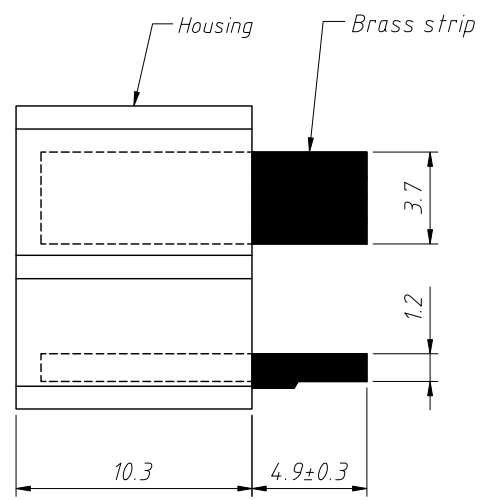


1
RoHS Compliance

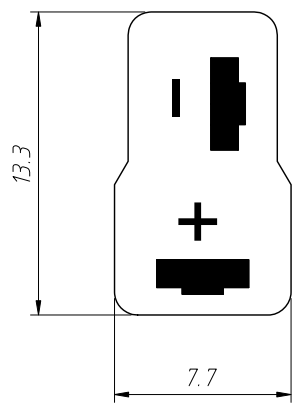


Material:
Housing: PA66 UL94-V2, Red Color
Brass strip: Gold-plated

Instructions:
Allowable carrying current: 30~50A
Operating temperature: -30°C~120°C
Weight: 1.95g
With "L-KLS1-XT01-M-6" Supporting the use
Product in a single welding line processing shall not exceed 10 seconds,
otherwise there will be high temperature oxidation welding.

Order Information:
L-KLS1-XT01-F-6
L: RoHS
Product series
Type: F-Female
Color: 6-Red

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		T Type Female plug Red	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-XT01-F-6
x.xx ±0.20	Draw:	Daniel	2022-08-25
x.xxx ±0.10	Check:	Daniel	2022-08-25



NingBo KLS ELECTRONIC CO.,L.TD.