


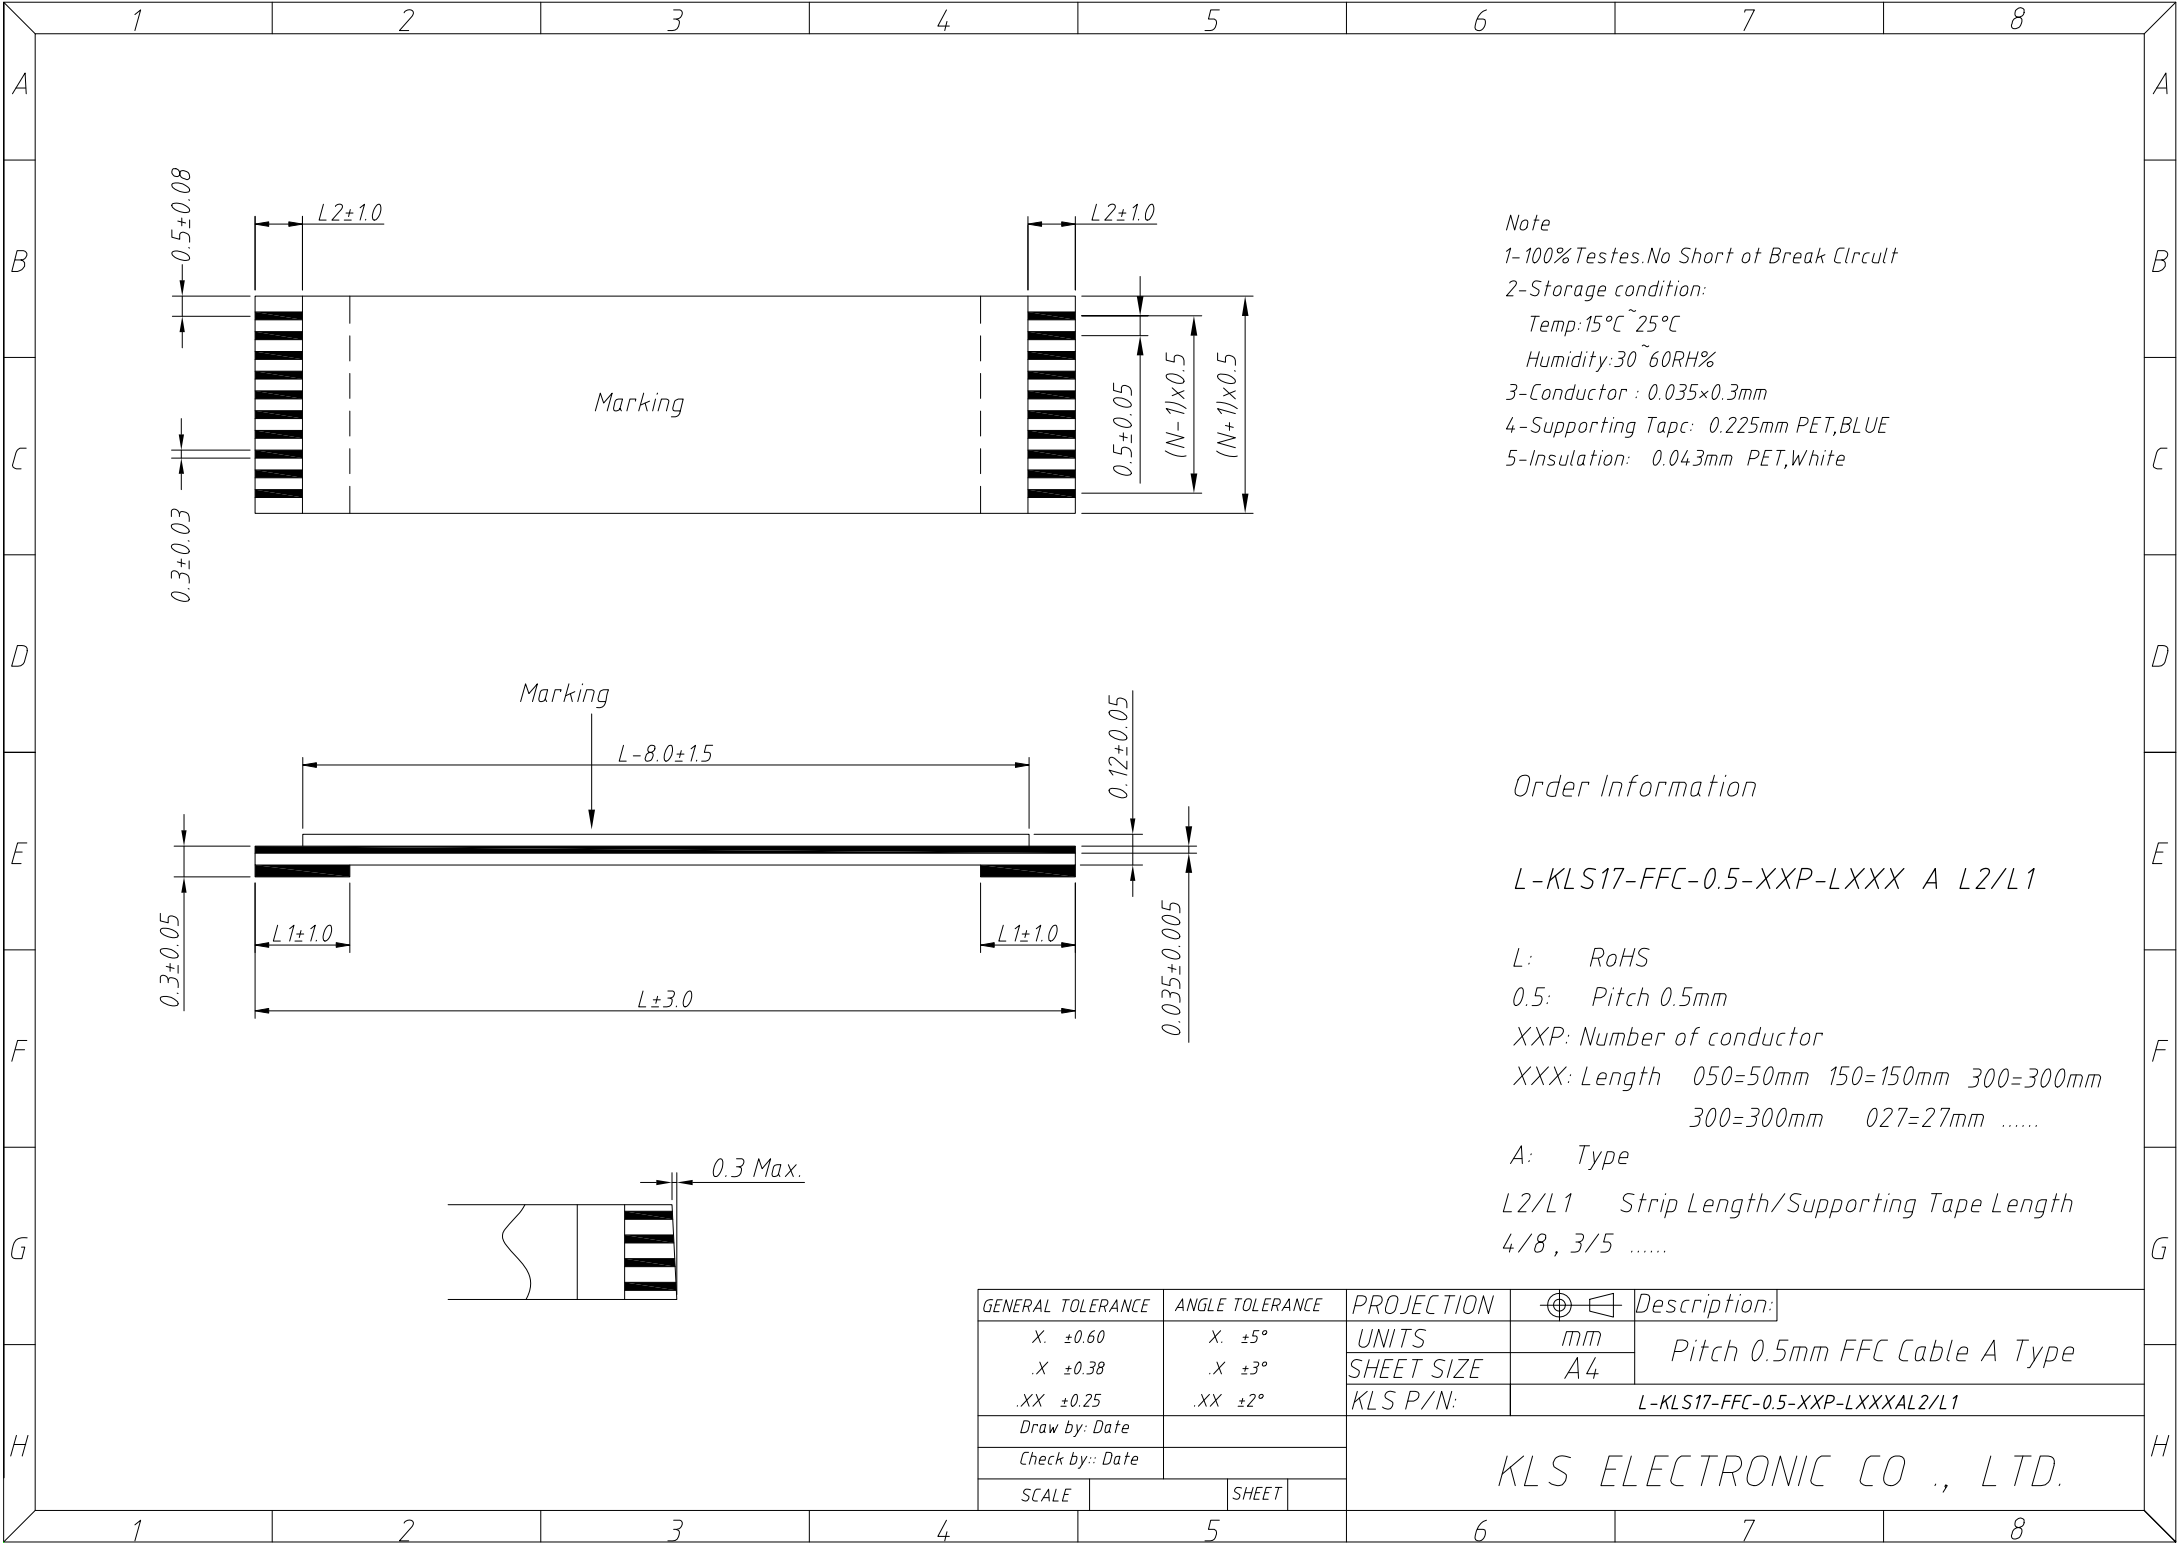

Note
1-100% Testes.No Short at Break Circult
2-Storage condition:
Temp:15℃~25℃
Humidity:30~60RH%
3-Conductor : 0.035×0.3mm
4-Supporting Tapc: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX A L2/L1

L: RoHS
0.5: Pitch 0.5mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm 300=300mm
300=300mm 027=27mm

A: Type
L2/L1 Strip Length/Supporting Tape Length
4/8, 3/5

GENERAL TOLERANCE		ANGLE TOLERANCE	PROJECTION	 Description:
X. ± 0.60	.X ± 0.38	X. $\pm 5^\circ$	UNITS	
.XX ± 0.25	.XX $\pm 2^\circ$		SHEET SIZE	Pitch 0.5mm FFC Cable A Type
Draw by: Date			KLS P/N:	L-KLS17-FFC-0.5-XXP-LXXXAL2/L1
Check by: Date				
SCALE		SHEET		

KLS ELECTRONIC CO., LTD.