

Lii-MP2 charger data

Brand: LiitoKala

Model: Lii-MP2

Input: 5V / 2A;9V/2A;12V/1.5A

Output:

Battery DC 4.2V=2A*2; 2A*1; 1A*2

Power Bank USB QC3.0 & PD3.0


DC 9V/2A;12V/1.5V;5V/2A

Suitable battery: 18650 21700

Orders include: Lii-MP2 * 1

USB cable * 1

Note: Only applicable to 3.7V 18650 and 21700 batteries. 18650 PCB is applicable, but 21700 PCB is not applicable.

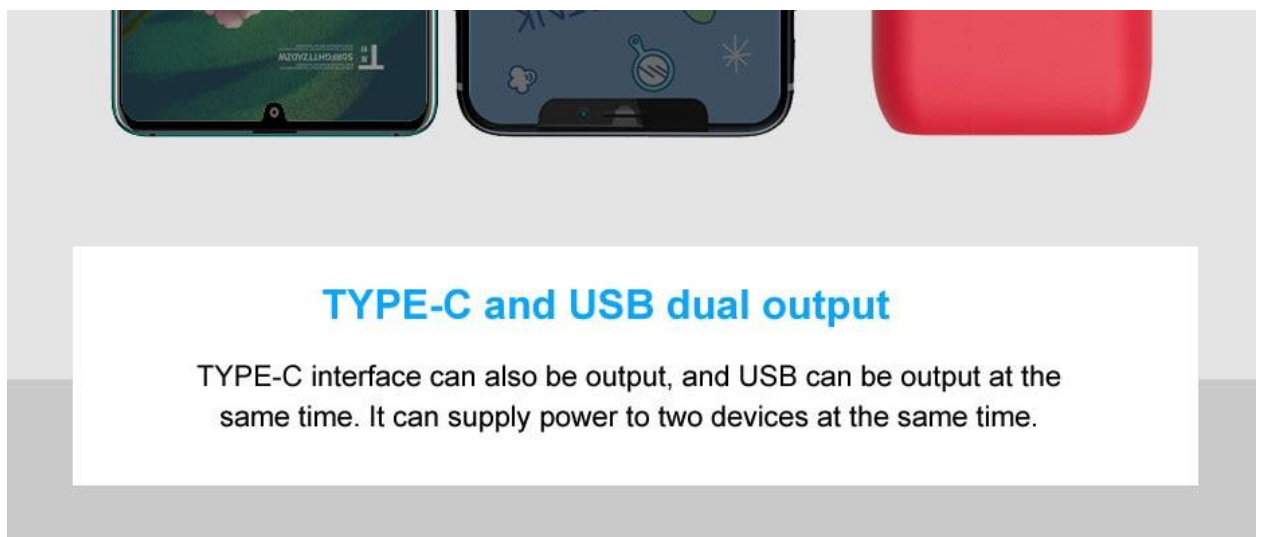

PRODUCTS SHOW





PRODUCT DATA

Input	QC3.0&PD3.0(DC:9V-2A / 12V-1.5V) / DC:5V-2.0A
Output	4.20V=2A*2
	USB POWER BANK OUTPUT: QC3.0&PD3.0 (DC:9V-2A / 12V-1.5A) / DC:5V-2.0A
Display	DIGITAL DISPLAY
Standby current	<=15mAh
Size	128*57*30mm
Weight	88g