


SPECIFICATION FOR APPROVAL

Metallized Polyester Film Capacitor - MKT Series

Customer:	Issue No.
Capacitance: 0.15 uF	Tolerance: ±5 %
Lot No.	Part No. MKT154J2EB
	W V 250 VDC

Diagram of Dimensions : (Unit : mm)


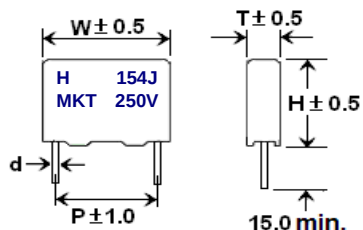


W: 13.0 ± 0.5
H: 11.0 ± 0.5
T: 5.0 ± 0.5
P: 10.0 ± 1.0
d: $\phi 0.6 \pm 0.05$

Marking :

H: SYMBOL OF HITANO
154: CAPACITANCE
J: TOLERANCE
MKT: SERIES
250V: RATED VOLTAGE

Specification	Materials
1 Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$	1 Element : Metallized Polyester film
2 Dissipation Factor : 1%MAX AT 1KHz, 20°C	2 Metal spray: Special solder (Lead Free)
3 Insulation Resistance : $> 10,000 \text{ M}\Omega$	3 Lead wire : Tinned copper clad-steel wire. (Lead Free)
4 Testing Voltage : 375 VDC for 1~3 sec.	4 Inner coating: Epoxy resin (UL-94V-0 Standard)
5 Characteristics Curves :	5 Outer Case: Plastic Case (UL-94V-0 Standard)

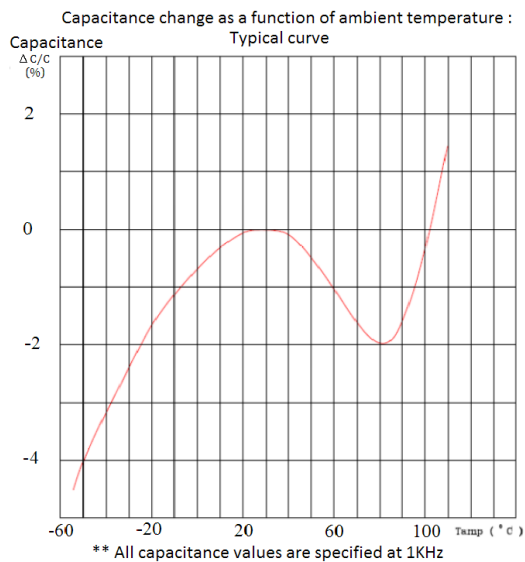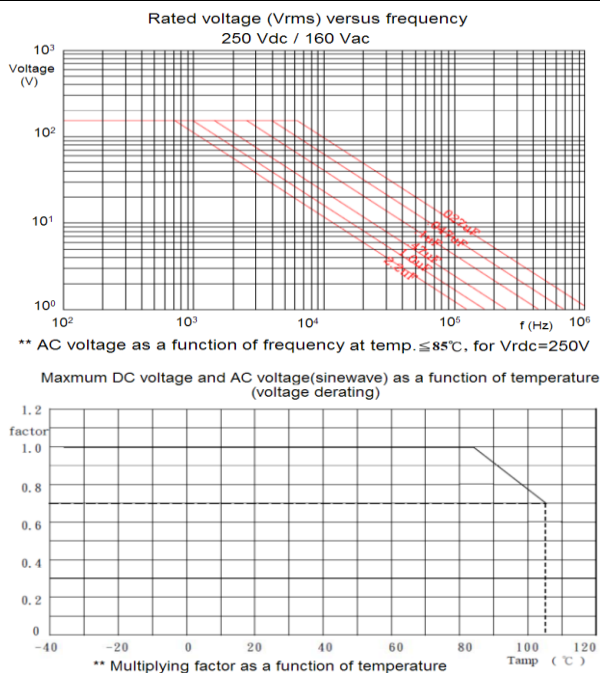

APPROVED BY CUSTOMER

Your Confirmation

- ☐ Approval
☐ Conditional Approval
☐ Rejection

(Please send a copy for our ref.)

REMARK :

For further details please visit the following link of our website:

[MKT_20160126.pdf](#)

Inspected by		Checked by	游弘明	Approved by	蘇彥華
--------------	--	------------	-----	-------------	-----