
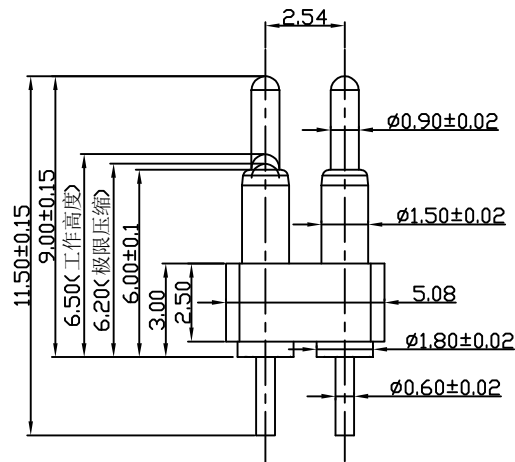
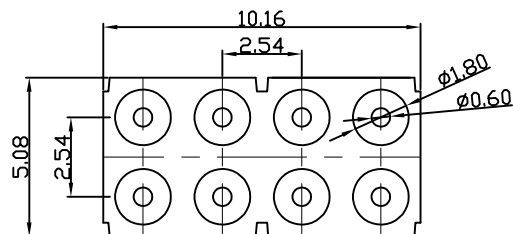
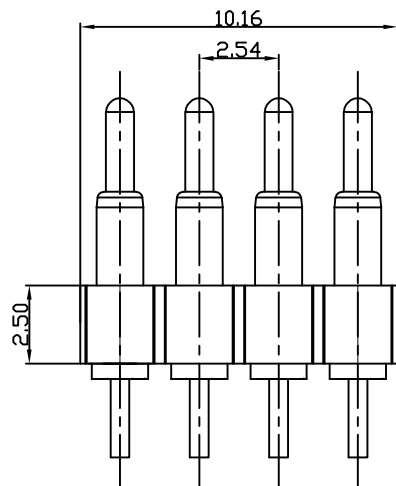


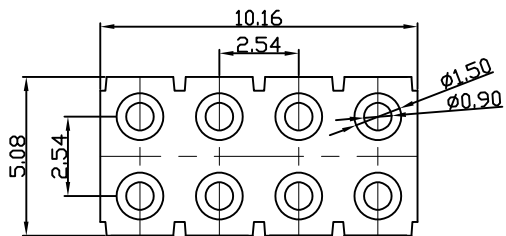

REVISIONS (变更)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE		2021.2.27

NOTE;

1.Material

Plunger: brass C3064

Barrel: brass C3604

Spring: SUS304

2.Plating

Plunger: 1 micro-inch minimum Au over 50~100 micro-inch nickel

Barrel : 1 micro-inch minimum Au over 50~100 micro-inch nickel

3.Electrical

Rated current & voltage: DC12V; 1A.

Contact resistance: 50 mohm maximum at working height(quietence)

4.Mechanical

Spring force: **100g $\pm$ 20g** at Normal working height

Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operate it based on the working height

Based on the engineering drawings,shall not exceed the maximum

allowed compression

6.RoHS & HF complied product.

DRAW (设计)	WANG	SCALE (比例)	UNIT (单位)	mm	XXXX			THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)ANGLE (角度)				深圳市元升电子有限公司		
CHECK (校对)		SHEET (页数)	PROJECT (视图)		MATERIAL (材质)	3604(国标钢)								
AUDIT (审核)		COUNTER SIGN (会签)	Seeing notes(见备注)		DATE (日期)	2021.2.27	VER	D.0	0~6.0±0.05mm0.±2.0°	>6~30±0.10mm0.0±1.0°	>30~120±0.15mm0.00±0.50°	PG1.8-11.5-3.0-W0.6-2.5-8P-2.54PH-2.5H-2R	DRAWING NO. (图号)	Y032
APPROVE (核准)		PLATE (镀层)			TITLE (品名)	Pogo pin 1P.								