

PMR10D Series

10W, Encapsulated DIP Package AC/DC Power Converters

Features

- ▶ Rated power: 10W
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ Regulated single output
- ▶ Isolation voltage 4000VAC
- ▶ Typical efficiency 74 ... 85%
- ▶ Energy saving, standby power only about 0.1W
- ▶ Operating temperature range: -40~+85°C
- ▶ RoHS compliance
- ▶ Compact DIP package
- ▶ Over current and short circuit protection
- ▶ *Meet IEC/EN/UL62368-1, EN60335, EN61558, CISPR32, EN55032 Class B
- ▶ 3 year warranty



*UL Certification is pending.

Overview

PMR10D series are compact size AC/DC power converters, featuring universal input voltage range, low stand by power consumption, high efficiency. Designed for high reliability industrial applications, these converters are encapsulated to protect from dust and moisture. They meet IEC/EN/UL62368, EN60335, EN61558, and EMC performance meets CISPR32, EN55032 Class B, ideally suitable for industrial, and critical commercial applications.

Model Numbers

Model Number	Input Voltage [VAC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
PMR10D-033	85~305VAC 100~430VDC	3.3	2600	74	3000
PMR10D-050		5	2000	79	3000
PMR10D-090		9	1100	81	1000
PMR10D-120		12	830	84	820
PMR10D-150		15	660	84	680
PMR10D-240		24	410	85	220

* Only typical models are listed, other models may be available, upon request.

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load.

Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Input voltage range	AC in	85	-	305	VAC	
	DC in	100	-	430	VDC	
Input frequency		47	-	63	Hz	
Nominal input voltage		100	-	277	VAC	
Input current	115VAC	-	-	0.23	A	
	230VAC	-	-	0.15	A	
Inrush current Cold start	115VAC	-	25	-	A	
	230VAC	-	40	-	A	
Leakage current	230VAC, 50Hz	-	-	0.1	mA RMS	
Output voltage accuracy		-	± 2	-	%	
Line regulation	Full load	-	± 0.5	-	%	
Load regulation $I_{OUT}=0\% \sim 100\%$ of $I_{OUT, rated}$		-	± 1.0	-	%	
Ripple and noise 20MHz bandwidth, peak to peak		-	50	150	mV	
Temperature coefficient		-	± 0.02	-	%/ $^{\circ}\text{C}$	
Standby power consumption		-	0.10	-	W	
Hold up time Full load	115VAC	-	8	-	mS	
	230VAC	-	40	-	mS	
Over current protection	Automatic recovery	110	-	-	% I_{OUT}	
Short circuit protection		Continuous, hiccup mode, automatic recovery				
Recommended External Fuse		2A, 300V slow blow *required*				
Minimum load		No minimum load is required				

* Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uF ceramic capacitor and a 10uF electrolytic capacitor in parallel.

General Specifications


Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Isolation voltage 1 minute, leakage current 5mA max	I/P to O/P	4000	-	-	VAC	
Isolation resistance 500VDC, 25°C, 70%RH	I/P to O/P	100	-	-	M Ohm	
Switching frequency		-	65	-	KHz	
Operating temperature range	See "Derating Curve"	-40	-	85	°C	
Storage temperature		-40	-	85	°C	
Storage humidity		10	-	95	%RH	
Operating altitude		-	-	5000	m	
Soldering temperature	Wave Manual	-	260 360	-	°C	
Case material		Black plastic UL94-V0				
Cooling method		Free air convection				
Vibration		10Hz to 55Hz, 10G, 30 minutes along X, Y and Z axis				
Class II power		Yes, no FG				
MTBF	MIL-HDBK-217F	> 300,000 Hours, 25°C				
Design based on standards		RoHS5 compliant, UL/IEC/EN62368, EN60335, EN61558				
Safety certifications		IEC/EN62368, EN60335, EN61558				
EMC		CISPR32, EN55032 Class B				
Size, and Weight		40.0x25.4x21.0mm, 40g				

Characteristic Curves


Derating Curves

Output vs Ambient Temperature


$V_{OUT}=3.3, 5V$

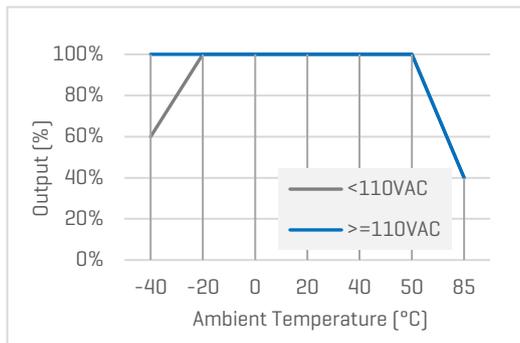


$V_{OUT}=9 \dots 24V$

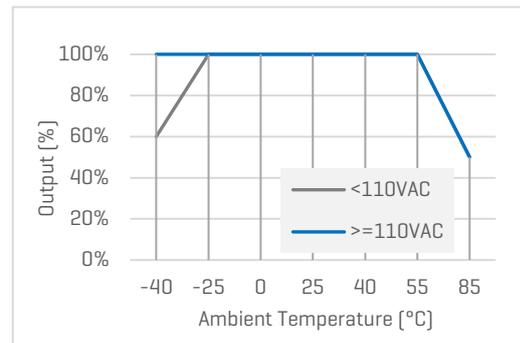

Output vs Input Voltage

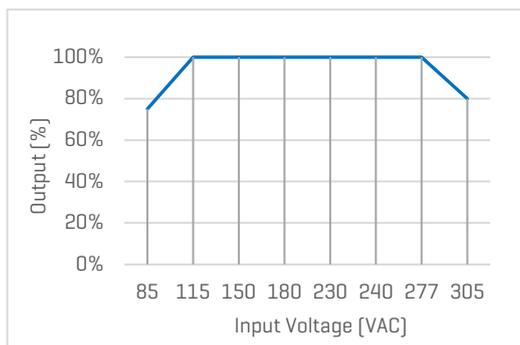


Output vs Altitude

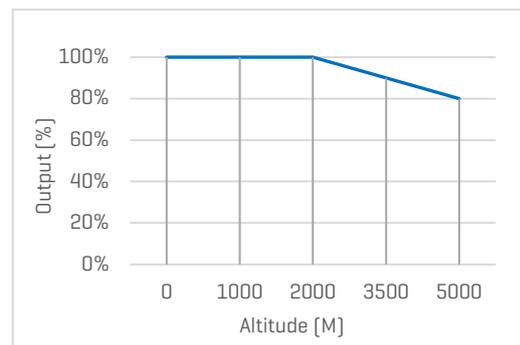


Efficiency Curves

Efficiency vs Input Voltage

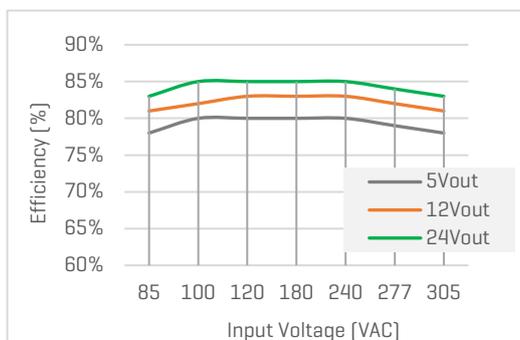

Efficiency vs Load

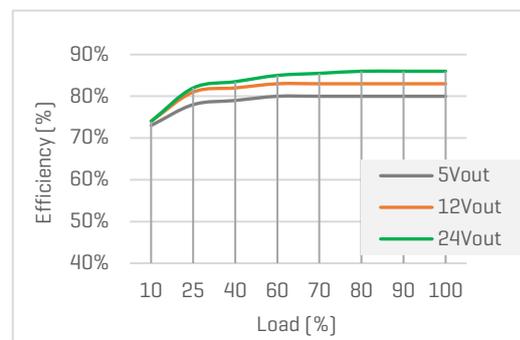

Recommended External Circuits

Typical External Circuit

Components with "" are required. The other components are highly recommended.

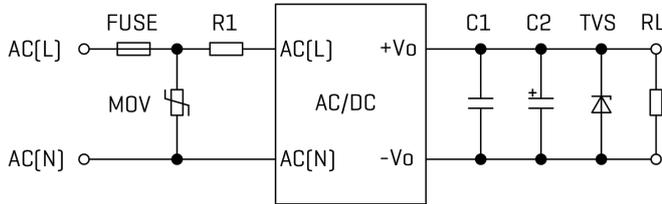


Figure 1. Typical external circuit

Recommended Components [Table 1]

SPEC	FUSE*	MOV	R1*	C1	C2	TVS
$V_{out}=3.3, 5V$	2A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	220uF, 16V	SMBJ7.0A
$V_{out}=9V$	2A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	100uF, 35V	SMBJ12A
$V_{out}=12, 15V$	2A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	100uF, 25V	SMBJ20A
$V_{out}=24V$	2A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	100uF, 35V	SMBJ30A

* For further questions contact one of our sales representatives.

EMC Enhancement for EN55032 Class B

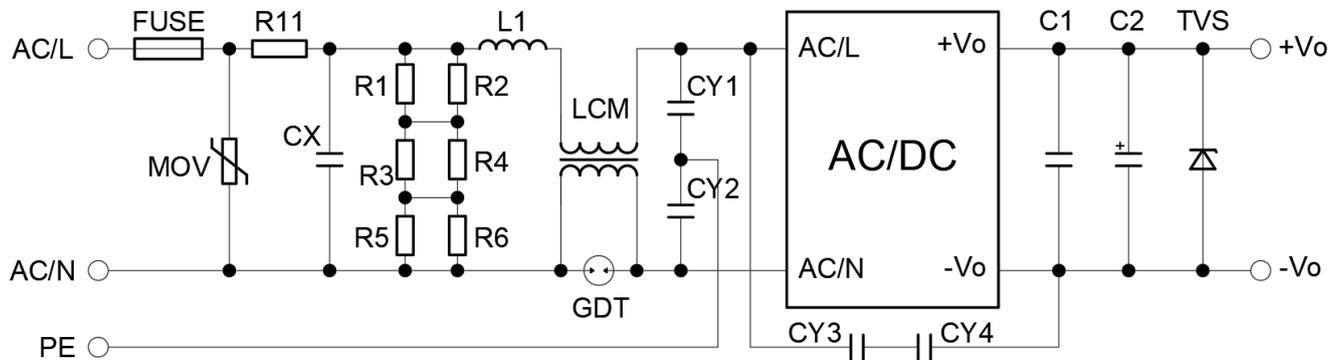


Figure 1. Circuit for EMC Enhancement




[Table 2] Recommended Components

MOV	CX	R11	L1	LCM	GDT	CY1, CY2	CY3, CY4
S14K350	334K, 305VAC	12 Ohm, 5W	1.2mH, 0.5A	20mH	300V, 1KA	2.2nF, 400VAC	1nF, 400VAC

*R1 ... R6 is the bleeder resistance of CX - 1.5Mohm, 150VDC

*Other components see the same in Table 1

Mechanical Specifications

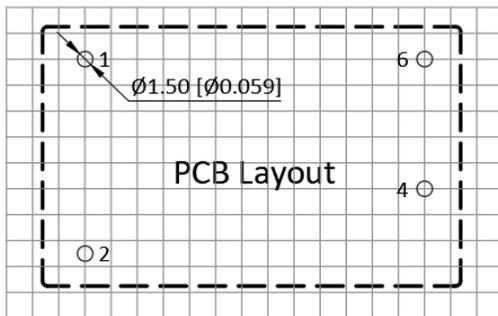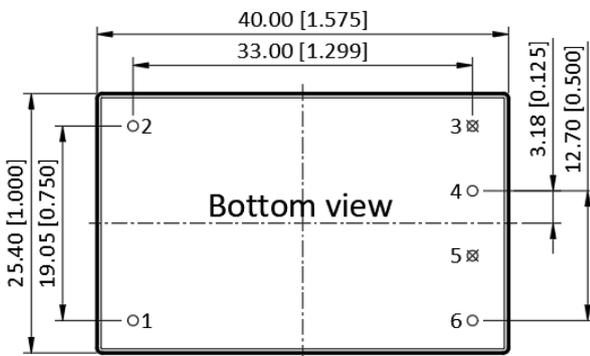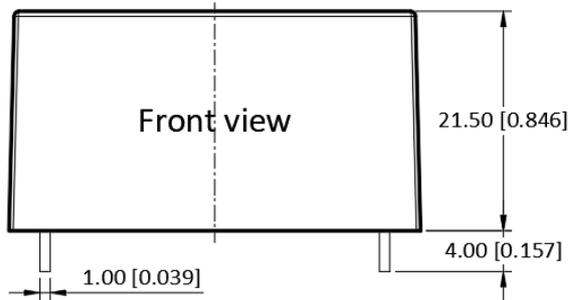

Pin Definition

Pin #	Single Out
1	AC [L]
2	AC [N]
3	No Pin
4	+V _{OUT}
5	No Pin
6	-V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ±1.00 [±0.040]

* Pin thickness: ±0.15 [±0.006]

* Pin distance: ±0.50 [±0.020]

* Footprint grid 2.54 x 2.54 mm

FAVOTEK LIMITED

#17 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong
 Tel: +852 8191 6662 Eml: info@favotek.com
 www.favotek.com

Favotek reserves the right to make changes to the product at any time without notice. Information provided by Favotek is believed to be accurate and reliable. However, no responsibility is assumed by Favotek for its use, nor for any infringements of patents or other rights of third parties which may result from its use.