


Features

- ▶ Rated power: 1 ... 5W Max
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ Non-isolated, regulated output
- ▶ Typical efficiency up to 77%
- ▶ Energy saving, standby power only 0.1W typ.
- ▶ Operating temperature range: -40~+85°C
- ▶ RoHS compliance
- ▶ Compact SIP package
- ▶ Over current and short circuit protection
- ▶ Comply to IEC/EN 62368-1, CISPR32, EN55032
- ▶ 3 year warranty



Overview

PNZR series are non-isolated AC/DC power converters, featuring universal input voltage range 85~305VAC, low standby power consumption, high efficiency. They are certified to IEC/EN 62368-1, and EMC performance meets CISPR32, EN55032, ideally suitable for industrial, and critical commercial applications.

Model Numbers

Model Number	Output Power [W]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
PNZR01S-050	1	5	200	60	500
PNZR03S-120	3	12	250	73	330
PNZR04S-120	4	12	330	75	160
PNZR05S-150	5	15	330	76	160
PNZR05S-180	5	18	280	77	160

* Only typical models are listed, other models may be available, upon request.

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load.

Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Input voltage range	AC in	85	-	305	VAC	
	DC in	70	-	430	VDC	
Input frequency		47	-	63	Hz	
Nominal input voltage		100	-	277	VAC	
Input current	115VAC	-	-	0.20	A	
	230VAC	-	-	0.14	A	
	277VAC	-	-	0.06	A	
Inrush current Cold start	115VAC	-	25	-	A	
	277VAC	-	40	-	A	
Output voltage accuracy $I_{OUT}=10\%\sim 100\%$ of $I_{OUT, rated}$		-	± 5	± 8	%	
Line regulation Full load		-	± 1.5	-	%	
Load regulation $I_{OUT}=10\%\sim 100\%$ of $I_{OUT, rated}$		-	± 3	-	%	
Ripple and noise 20MHz bandwidth, peak to peak		-	50	150	mV	
Standby power consumption	230VAC	-	0.10	0.40	W	
Temperature coefficient		-	± 0.15	-	%/ $^{\circ}\text{C}$	
Minimum load		10	-	-	%	
Over current protection	Automatic recovery	110	-	-	% I_{OUT}	
Short circuit protection	Automatic recovery	Continuous, hiccup mode				
Recommended external fuse		1A, 300V slow blow *required*				

* Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uF ceramic capacitor and a 10uF electrolytic capacitor in parallel.

General Specifications


Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Isolation voltage	Input to Output	-	0	-	VAC	
Operating temperature range	See "Derating Curve"	-40	-	85	°C	
Storage temperature		-40	-	105	°C	
Storage humidity		-	-	95	%RH	
Soldering temperature	Wave Manual	-	260 360	-	°C	
Cooling method		Free air convection				
Safety class		Class II, no FG				
MTBF	MIL-HDBK-217F	>1,000,000 Hours, 25°C				
Design based on standards		IEC/EN/UL 62368-1				
Safety certifications		IEC/EN 62368-1				
EMC		CISPR32, EN55032 Class B with external circuit				
Size, and Weight		16.1 x 15.1 x 9.5 mm, 4.2g				

Characteristic Curves


Derating Curves

Output vs Ambient Temperature


PNZR01S, PNZR03S

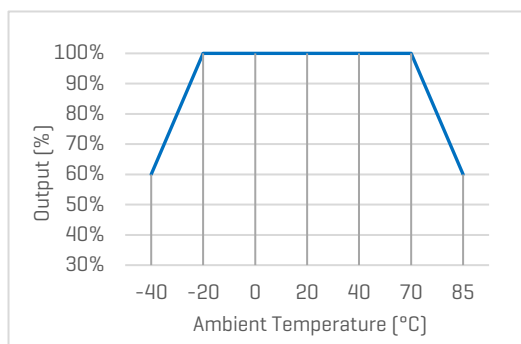

PNZR04S, PNZR05S

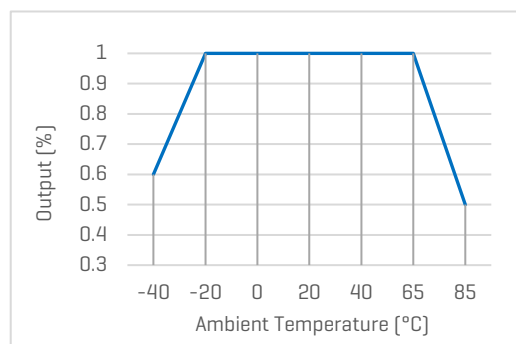

Output vs Input Voltage

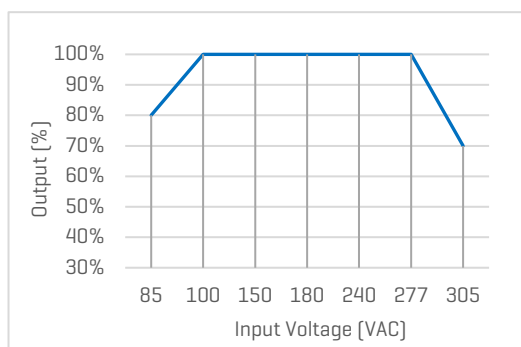

Recommended External Circuits

Typical External Circuit

This circuit is the basic design reference, components with "" are required for the converter's operating.

*FUSE to be 1A, slow blow and is also required for safety.

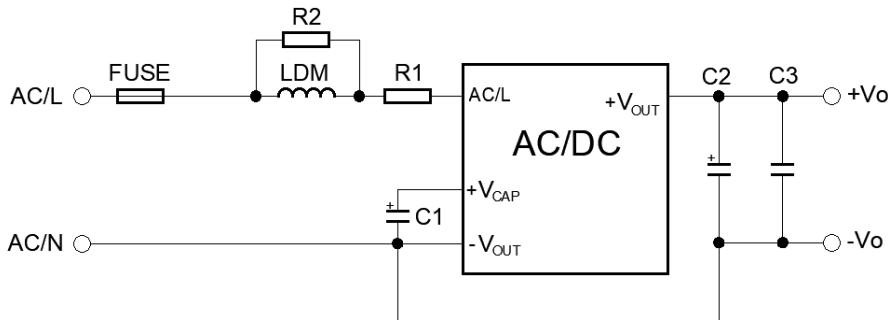


Figure 1. Typical external circuit

Recommended Component Spec [Table 1]

Model Number	LDM*	R1*	R2	C1*	C2*	C3
PNZR01S-050	1.2mH	-	-	22uF, 450V	220uF, 16V	-
PNZR03S-120	1.2mH	-	-	22uF, 450V	220uF, 16V	-
PNZR04S-120	2.2mH	2 0hm, 2W	8.2K0hm, 0.25W	22uF, 450V	470uF, 35V	0.1uF, 50V
PNZR05S-150	2.2mH	2 0hm, 2W	8.2K0hm, 0.25W	22uF, 450V	470uF, 35V	0.1uF, 50V
PNZR05S-180	2.2mH	2 0hm, 2W	8.2K0hm, 0.25W	22uF, 450V	470uF, 35V	0.1uF, 50V

EMC Enhancement for EN55032 Class B

*This application circuit is recommended for EMC enhancement. It is not mandatory if this is not critical in the application.

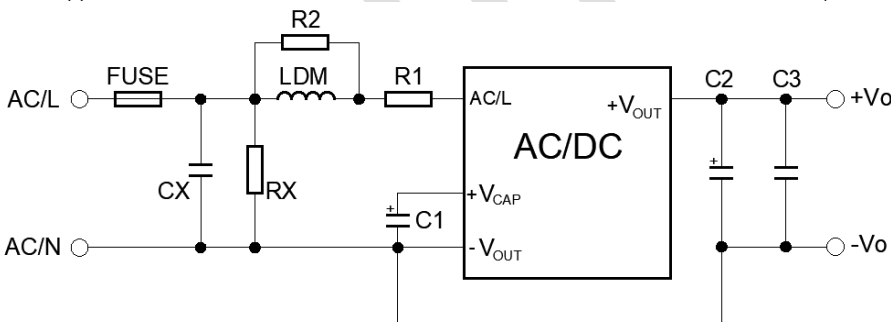


Figure 2. External circuit for EMC enhancement


Recommended Component Spec [Table 2]

Item	CX	RX*
Spec	0.1uF, 310VAC	5M ... 8M 0hm

Components above with "" are required for the converter's operating.

*Refer to Table 1 for other components

Mechanical Specifications

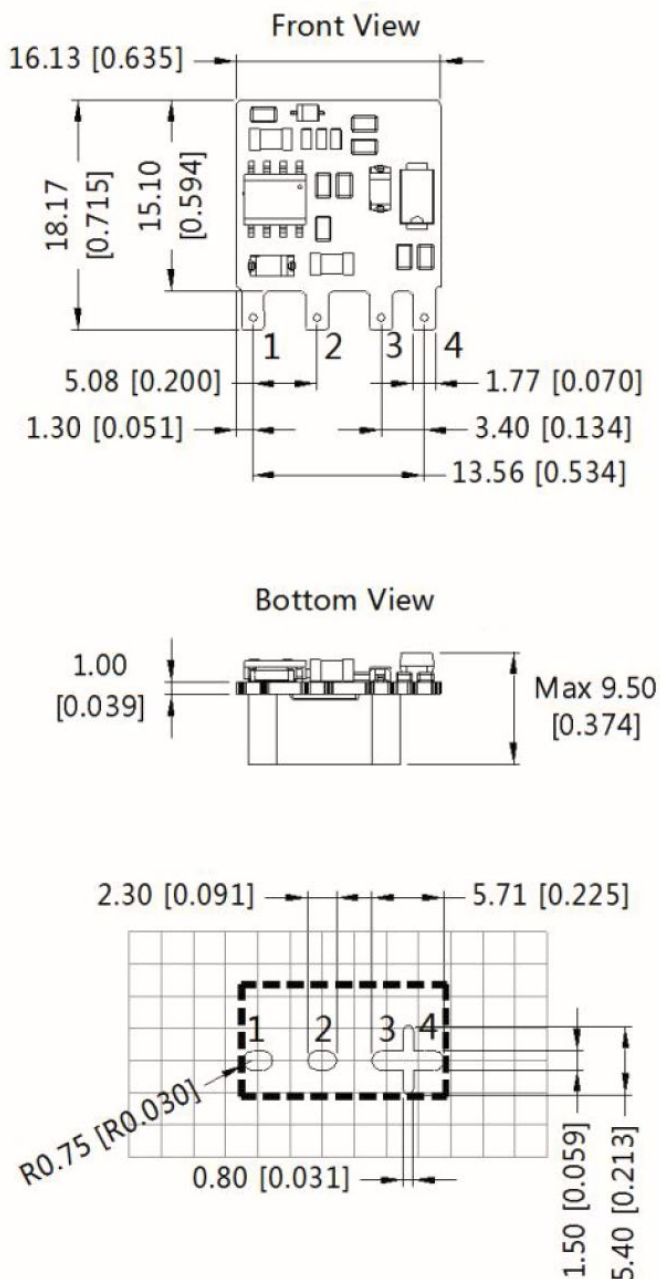

Pin Definition

Pin #	Single Out
1	AC [L]
2	+V [CAP]
3	AC [N] / -V _{OUT}
4	+V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ± 1.00 [± 0.040]

* Pin thickness: ± 0.10 [± 0.004]

* Footprint grid 2.54 x 2.54 mm

FAVOTEK LIMITED

#17 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong
 Tel: +852 8191 6662 Eml: info@favotek.com
 www.favotek.com

Favotek reserves the right to make changes to the product at any time without notice. Information provided by Favotek is believed to be accurate and reliable. However, no responsibility is assumed by Favotek for its use, nor for any infringements of patents or other rights of third parties which may result from its use.