

Data Sheet

Customer: _____

Product: Thick Film Chip Resistor. General Purpose RC Series

Size : 0201/0402/0603/0805/1206/1210/2010/2512

Issued Date: 04-Oct.-2023

Edition: Ver. 4

Record of change

Date	Ver.	Description	Page
1-Apr.-2015	1		
08-Apr-2021	2	Packing	7
21-Jun-2021	3	ppm	
04-Oct.-2023	4	Add size 01005 & revise rating	1~3

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
04-Oct.-2023	04-Oct.-2023	04-Oct.-2023	
Hwa Wu	Andy Hsu	Arthur Su	

THICK FILM CHIP RESISTORS

RC SERIES


■ Features

- Suitable for lead free soldering.
- Compatible with wave and reflow soldering
- RoHS compliant & Halogen Free

■ Applications


- Portable Devices
- Consumer Electronics
- Measurement instrument
- Computer / Motherboard

■ Configuration

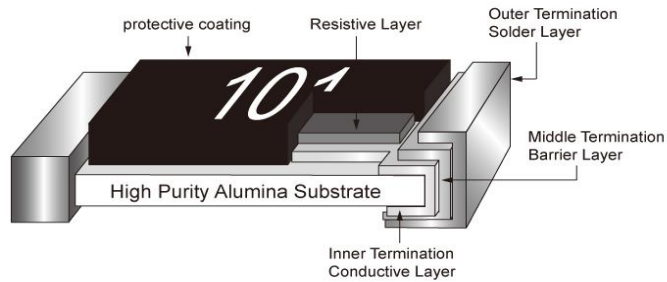

Construction of Chip-Resistor

■ Dimensions



Size	L	W	C	D	T
01005	0.40±0.02	0.20±0.02	0.08±0.03	0.10±0.03	0.13±0.02
0201	0.60±0.03	0.30±0.03	0.10±0.05	0.15±0.05	0.23±0.03
0402	1.00±0.05	0.50±0.05	0.20±0.10	0.25±0.10	0.35±0.05
0603	1.60±0.10	0.80±0.10	0.30±0.20	0.30±0.20	0.45±0.10
0805	2.00±0.10	1.25±0.10	0.40±0.20	0.40±0.20	0.50±0.10
1206	3.10±0.10	1.60±0.10	0.50±0.20	0.50±0.25	0.55±0.10
1210	3.10±0.10	2.60±0.15	0.50±0.25	0.50±0.25	0.55±0.10
2010	5.00±0.20	2.50±0.20	0.60±0.25	0.60±0.25	0.60±0.10
2512	6.40±0.20	3.20±0.20	0.60±0.25	0.90±0.25	0.60±0.15

(unit: mm)

■ Part Numbering:

RC 0805 F R = 100R

Size 01005 0201 0402 0603 0805 1206 1210 2012 2512	Tolerance F=±1% J=±5%	Packing style R = Paper K = Embossed Plastic	Special Type - = 7 inch Dia. Reel (Standard) 10 = 10 inch Reel (non preferred) 13 = 13 inch Reel	Resistance Value for example 1R 10KR 10R 100KR 100R 1MR 1KR 10MR
--	------------------------------------	--	--	--

THICK FILM CHIP RESISTORS

RC SERIES

■ Resistance Marking

E - 24 SERIES



3 digits for 0603/0805/1206/1210, ±5%, E24

examples: **473** $47 \times 10^3 = 47K\Omega$

1R5 $= 1.5\Omega$



4 digits for 2010/2512, ±5%, E24

examples: **4702** $470 \times 10^2 = 47K\Omega$

1R50 $= 1.5\Omega$

E - 96 SERIES



4 digits for ±1%, E24

examples: **1542** $154 \times 10^2 = 15K4\Omega$

22R1 $= 22.1\Omega$




3 digits for 0603, ±1%, E96

examples: **02C** (Table 1)


$102 \times 10^2 = 10K2\Omega$

※ No Marking of 0402 / 0201 / 01005

■ Power Derating Curve

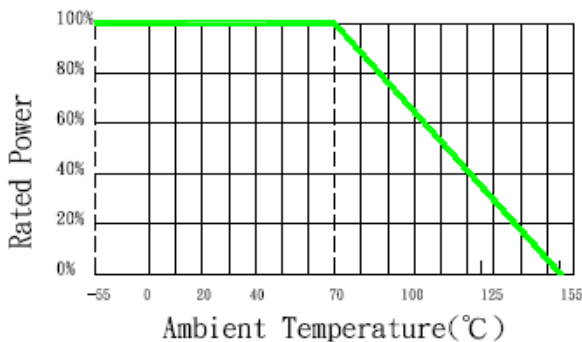

Maximum dissipation in percentage of rated power as a function of the ambient temperature for 0402,0603,0805,1206,1210,2010,2512

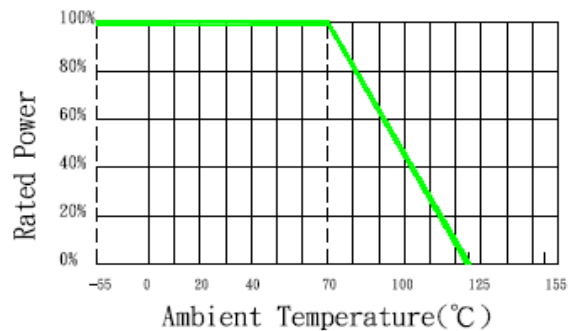

Maximum dissipation in percentage of rated power as a function of the ambient temperature for 01005,0201

THICK FILM CHIP RESISTORS

RC SERIES

Rating

Type	Size	Power Rating at 70°C	Max. RCWV	Max. Overload Voltage	Resistance Tolerance (%)	Temperature Coefficient (TCR; ppm/°C)	Resistance Range(Ω)		Standard Resistance Values
							Min.	Max.	
RC01005	01005	1/32W	15V	30V	±1%(F)	±200	100	1M	E-96
						±300	10	91	E-96
						-200 ~ +600	0 & .4.7	9.76	E-96
					±5%(J)	±200	100	1M	E-24
						±300	10	91	E-24
						-200 ~ +600	0 & .4.7	9.1	E-24
RC0201	0201	1/20W	25V	50V	±1%(F)	±200	10	10M	E-96
						-200 ~ +600	1	9.76	E-96
					±5%(J)	±200	10	10M	E-24
RC0402	0402	1/16W	50V	100V	±1%(F)	±100	10.2	10M	E-96
						-200 ~ +400	1	10	E-96
					±5%(J)	±200	10.2	10M	E-24
RC0603	0603	1/10W	75V	100V	±1%(F)	±50	20	510K	E-96
						±100	10.2	10M	E-96
					RC0805	0805	1/8W	150V	300V
±200	10.2	10M	E-24						
RC1206	1206	1/4W	200V	400V					
					±100	10.2	10M	E-96	
RC1210	1210	1/3W	200V	400V	±1%(F)	±100	10.2	10M	E-96
						±200	1	10	E-96
RC2010	2010	3/4W	200V	400V	±1%(F)	±200	1	10	E-96
						±5%(J)	±200	0 & .1	10M
RC2512	2512	1W	250V	500V	±5%(J)	±200	0 & .1	10M	E-24

※ Resistance 1~10Ω, TCR 100ppm available upon special request.

◎ For size : 0603/0805/1206/2010/2512

※ Resistance "0" means Jumper or 0Ω :

◎ 01005 size maximum resistance $R_{max} < 50m\Omega$ and rated current $I_R \leq 0.8A$


◎ 0201,0402,0603 size maximum resistance $R_{max} < 50m\Omega$ and rated current $I_R \leq 1A$

◎ 0805,1206,1210,2010,2512 size maximum resistance $R_{max} < 50m\Omega$ and rated current $I_R \leq 2A$


◎ ±1% Jumper or 0Ω is available, all size $R_{max} < 30m\Omega$.

◎ TCR parameter is not applicable of jumper.

Soldering Temperature Curve

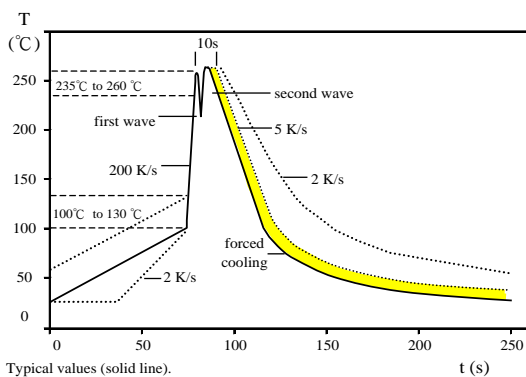

WAVE soldering.

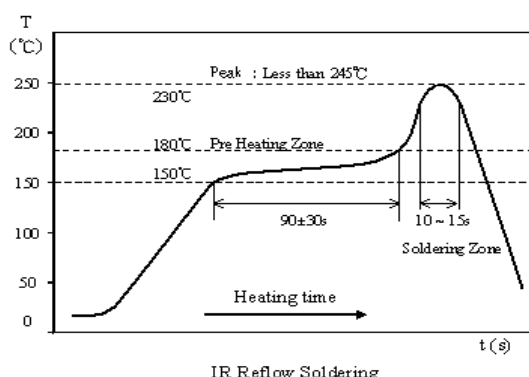

IR Reflow Soldering

THICK FILM CHIP RESISTORS

RC SERIES

■ RC ≥ 1Ω Specification And Test Methods

ITEM	SPECIFICATION	TEST METHOD
DC Resistance	J: ±5% , F: ±1% Zero ohm Jumper < 50mΩ	IEC 60115-1 / JIS C 5201-1, Clause 4.5 Measure the resistance value.
Short time Overload	J: $\Delta R \leq \pm(2\% + 0.1\Omega)$ F: $\Delta R \leq \pm(1\% + 0.05\Omega)$	IEC 60115-1 / JIS C 5201-1, Clause 4.13 2.5×Rated voltage or Max. Overload Voltage for 5 sec. measure resistance after 30 minutes
Solderability	Over 95% of termination must be covered with Solder	IEC 60115-1 / JIS C 5201-1, Clause 4.17 After immersing flux, dip in the 245±2°C molten solder bath for 3±0.5 sec
Resistance to Solder Heat	J: $\Delta R \leq \pm(1\% + 0.1\Omega)$ F: $\Delta R \leq \pm(0.5\% + 0.05\Omega)$ No mechanical damage	IEC 60115-1 / JIS C 5201-1, Clause 4.18 With 260±5°C for 10±1 sec.
Temperature Coefficient of Resistance (TCR)	Refer to the rating table information.	IEC 60115-1 / JIS C 5201-1, Clause 4.8 Test temperature : 25°C (T1) → -55°C (T2) 25°C (T1) → +155°C (T2) $TCR (\text{ppm}/^\circ\text{C}) = \frac{R2-R1}{R1} \times \frac{1}{T2-T1} \times 10^6$ T1: 25°C T2: Test temperature R1: Resistance at reference temperature (T1) R2: Resistance at test temperature (T2)
Load Life Humidity	J: $\Delta R \leq \pm(3\% + 0.1\Omega)$ F: $\Delta R \leq \pm(1\% + 0.05\Omega)$	IEC 60115-1 / JIS C 5201-1, Clause 4.24 Maintain the temperature of the resistor at 40±2°C and 90~95% R.H. with the rated voltage applied. Cycle ON for 1.5 hours and OFF for 0.5 hour for 1000+48/-0 hours. After 1~4 hour, measure the resistance value.
Load Life	J: $\Delta R \leq \pm(3\% + 0.1\Omega)$ F: $\Delta R \leq \pm(1\% + 0.05\Omega)$	IEC 60115-1 / JIS C 5201-1, Clause 4.25 Permanent resistance change after 1000+48/-0 hours (1.5 hours ON, 0.5 hour OFF) at RCWV or Max. Keep the resistor at 70±2°C ambient
Temperature Cycle	J: $\Delta R \leq \pm(1\% + 0.1\Omega)$ F: $\Delta R \leq \pm(0.5\% + 0.05\Omega)$ No mechanical damage	IEC 60115-1 / JIS C 5201-1, Clause 4.19 Repeat 5 cycles as follows -55°C (30 min.) + 25°C (2~3 min.) +155°C (30 min.) + 25°C (2~3 min.)
Insulation Resistance	Between termination and coating must be over 1000MΩ	IEC 60115-1 / JIS C 5201-1, Clause 4.6 Test voltage: 100±15V
Bending Strength	J: $\Delta R \leq \pm(1\% + 0.1\Omega)$ F: $\Delta R \leq \pm(0.5\% + 0.05\Omega)$ No mechanical damage	IEC 60115-1 / JIS C 5201-1, Clause 4.33 Resistance change after bended on the 90mm PCB. Bend: 3mm for 01005、0201、0402、0603、0805 2mm for 1206、1210、2010、2512

■ Storage & Handling

... Products are recommended to be used up within one year as ensured shelf life.

Check solder ability in case shelf life extension is needed.

... To store products with following condition:

Temperature: 5 to 40°C ; Humidity: 20 to 70% relative humidity.


THICK FILM CHIP RESISTORS

RC SERIES

SPECIFICATION

■ Tape And Reel Package

- Taping specs are according to EIA RS-481

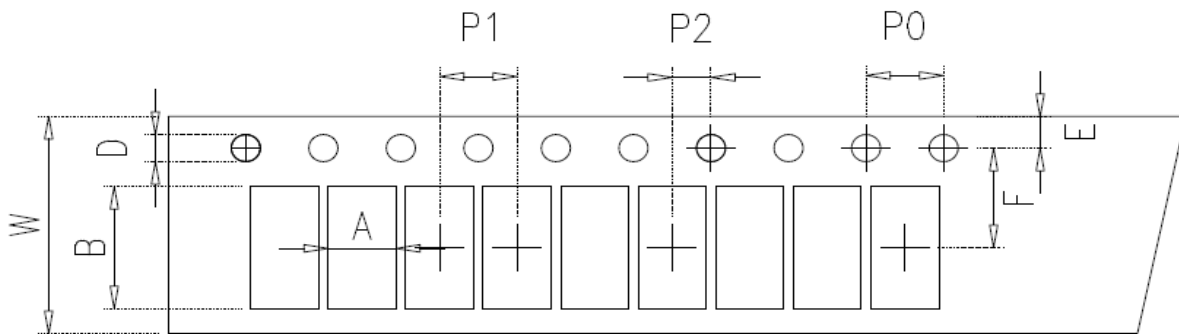

Accumulated dimensional tolerance 40±0.2mm


Size	A	B	W	F	E	P1	P2	P0	D
01005	0.24±0.03	0.45±0.03	8.00±0.20	3.50±0.05	1.75±0.10	2.00±0.05	2.00±0.05	4.00±0.10	1.50+0.10/-0
0201	0.37±0.05	0.67±0.05	8.00±0.20	3.50±0.05	1.75±0.10	2.00±0.05	2.00±0.05	4.00±0.10	1.50+0.10/-0
0402	0.70±0.10	1.20±0.10	8.00±0.30	3.50±0.05	1.75±0.10	2.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
0603	1.10±0.20	1.90±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
0805	1.65±0.20	2.40±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
1206	2.00±0.20	3.60±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
1210	3.00±0.20	3.60±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
2010	2.80±0.20	5.50±0.20	12.00±0.30	5.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
2512	3.50±0.20	6.70±0.20	12.00±0.30	5.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0

(unit: mm)

THICK FILM CHIP RESISTORS

RC SERIES

• Reel Package

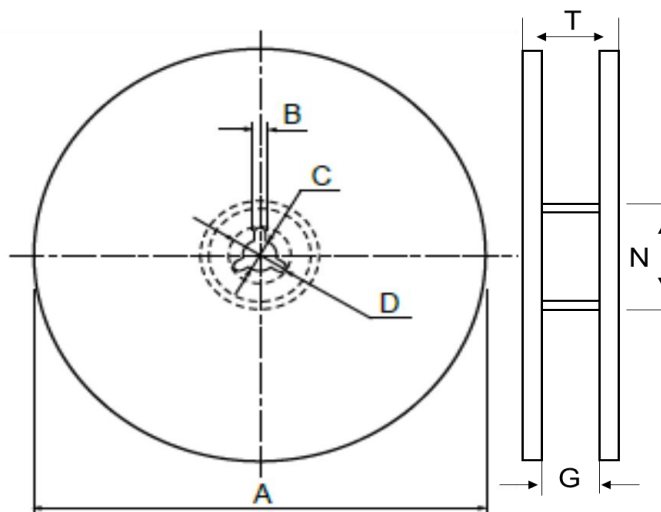

Size	Packaging Q'ty	A	N	C	D	B	G	T
01005	20Kpcs / Reel	178.0±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	9.0±1.0	14.9 max.
0201	15Kpcs / Reel	178.0±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	9.0±0.5	14.9 max.
	70Kpcs / Reel	330.0±2.0	100.0±1.0	13.0±0.5	20min	2.0±0.5	9.0±0.5	14.9 max.
0402	10Kpcs / Reel	178.0±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	10.0±1.5	14.9 max.
0603 0805 1206 1210	1Kpcs / Reel	100.0±0.5	52.0±0.5	13.0±0.5	20min	2.0±0.5	9.0±0.5	12.5 max.
	5Kpcs / Reel	178.0±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	10.0±1.5	14.9 max.
	10Kpcs / Reel	254.0±2.0	100.0±1.0	13.5±0.5	20min	2.0±0.5	10.0±1.5	14.9 max.
	20Kpcs / Reel	330.0±2.0	100.0±1.0	13.5±0.5	20min	2.0±0.5	10.0±1.5	14.9 max.
2010 2512	4Kpcs / Reel	178.0±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	13.8±1.5	16.7 max.
	8Kpcs / Reel	254.0±2.0	100.0±1.0	13.5±0.5	20min	2.0±0.5	13.8±1.5	16.7 max.
	16Kpcs / Reel	330.0±2.0	100.0±1.0	13.5±0.5	20min	2.0±0.5	13.8±1.5	20.0 max.

(unit: mm)

THICK FILM CHIP RESISTORS

RC SERIES

0603 1% Marking Table (Table 1)

Code	E48	E96	Code	E48	E96	Code	E48	E96	Code	E48	E96
01	100	100	25	178	178	49	316	316	73	562	562
02		102	26		182	50		324	74		576
03	105	105	27	187	187	51	332	332	75	590	590
04		107	28		191	52		340	76		604
05	110	110	29	196	196	53	348	348	77	619	619
06		113	30		200	54		357	78		634
07	115	115	31	205	205	55	365	365	79	649	649
08		118	32		210	56		374	80		665
09	121	121	33	215	215	57	383	383	81	681	681
10		124	34		221	58		392	82		698
11	127	127	35	226	226	59	402	402	83	715	715
12		130	36		232	60		412	84		732
13	133	133	37	237	237	61	422	422	85	750	750
14		137	38		243	62		432	86		768
15	140	140	39	249	249	63	442	442	87	787	787
16		143	40		255	64		453	88		806
17	147	147	41	261	261	65	464	464	89	825	825
18		150	42		267	66		475	90		845
19	154	154	43	274	274	67	487	487	91	866	866
20		158	44		280	68		499	92		887
21	162	162	45	287	287	69	511	511	93	909	909
22		165	46		294	70		523	94		931
23	169	169	47	301	301	71	536	536	95	953	953
24		174	48		309	72		549	96		976

Code	A	B	C	D	E	F	G	H	X	Y	Z
Multiplier	10^0	10^1	10^2	10^3	10^4	10^5	10^6	10^7	10^{-1}	10^{-2}	10^{-3}

Standard resistance value

E3	10				22				47								
E6	10		15		22		33		47		68						
E12	10	12	15	18	22	27	33	39	47	56	68	82					
E24	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43	47
	51	56	62	68	75	82	91										
E96	100	102	105	107	110	113	115	118	121	124	127	130	133	137	140	143	147
	150	154	158	162	165	169	174	178	182	187	191	196	200	205	210	215	221
	226	232	237	243	249	255	261	267	274	280	287	294	301	309	316	324	332
	340	348	357	365	374	383	392	402	412	422	432	442	453	464	475	487	499
	511	523	536	549	562	576	590	604	619	634	649	665	681	698	715	732	750
	768	787	806	825	845	866	887	909	931	953	976						