


Specifications	RCD3115-900KV	
Stator Diameter	定子外径	31
Stator Thickness	定子厚度	15
No. of Stator Arms	定子槽数	12
No. of Stator Poles	定子极数	14
Motor KV	电机KV值	900
No-Load Current (25.2V)	空载电流 (25.2V)	2.5A Max
Motor Resistance	电机电阻	60mΩ (Ref)
Weight	电机重量	112g+/-2g
Outside Diameter	转子直径	37.5+/-0.2 mm
Body Length	电机长度	33.6+/-0.5 mm
Outside View		

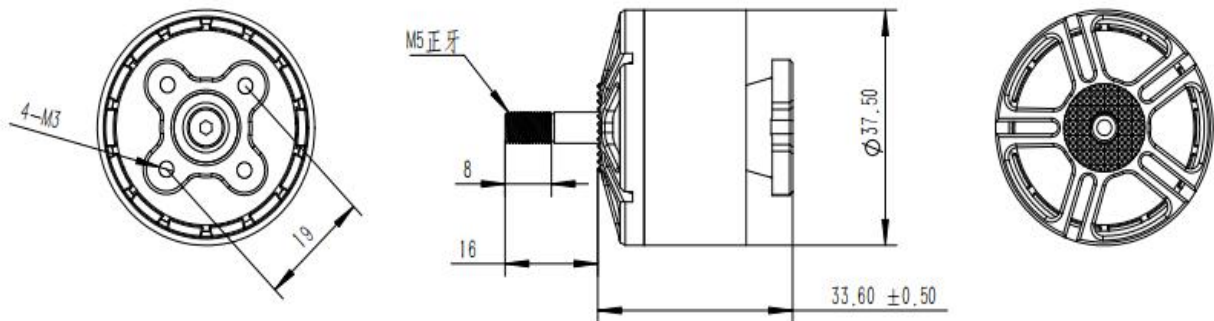

电机	油门 - %	PWM - us	电压 - V	电流 - A	拉力 - gf	扭矩 - N*m	换相转速 - RPM	红外温度 - ℃	总(电) 功率 - W	电机效率 - %	桨力效 - gf/W	环境温度 - ℃
3115-900KV 1050桨	20	1080	25.32	0.74	128	0.027	2984	58.6	18.7	45	15.2	25.9
	30	1220	25.2	3.25	469	0.086	5293	56.9	81.9	58.2	9.8	25.8
	40	1360	24.96	8.55	1024	0.173	7452	55.2	213.4	63.3	7.6	25.6
	50	1500	24.5	18.25	1781	0.294	9547	54	447.1	65.7	6.1	25.2
	60	1640	23.86	32.18	2526	0.411	11286	54	767.8	63.3	5.2	25.3
	70	1780	23.12	47.34	3178	0.514	12599	54.9	1094.5	62	4.7	25.1
	80	1920	22.22	64.2	3651	0.599	13600	57.8	1426.5	59.8	4.3	25.1
	90	1900	22.1	66.2	3870	0.622	14000	58.6	1463	58.4	4.2	26.3
	100	2000	22.1	68	3960	0.650	14650	59.1	1502	57.1	4	26.8

备注：电机颜色可订制，电机可镭雕，电机KV值可订制，出线长度可订制
同款电机有3110/3115等