

Specification parameter

Shell material: thermoplastic PA66

Insulator: thermoplastic PPS high temperature resistant 260

Contact material: copper (gold plated, silver plated)

Sealing ring: silica gel

Housing gender: male female seat

Connection: thread connection

Operating temperature: -35 degrees C~110 degrees C



Relative humidity: 90%~95% (40 + 2 degrees C)

Sealing: in line with IP68

Applicable wire diameter: diameter 3.0~6.5mm

Mechanical life: more than 500 times

SP1310 Docking Size

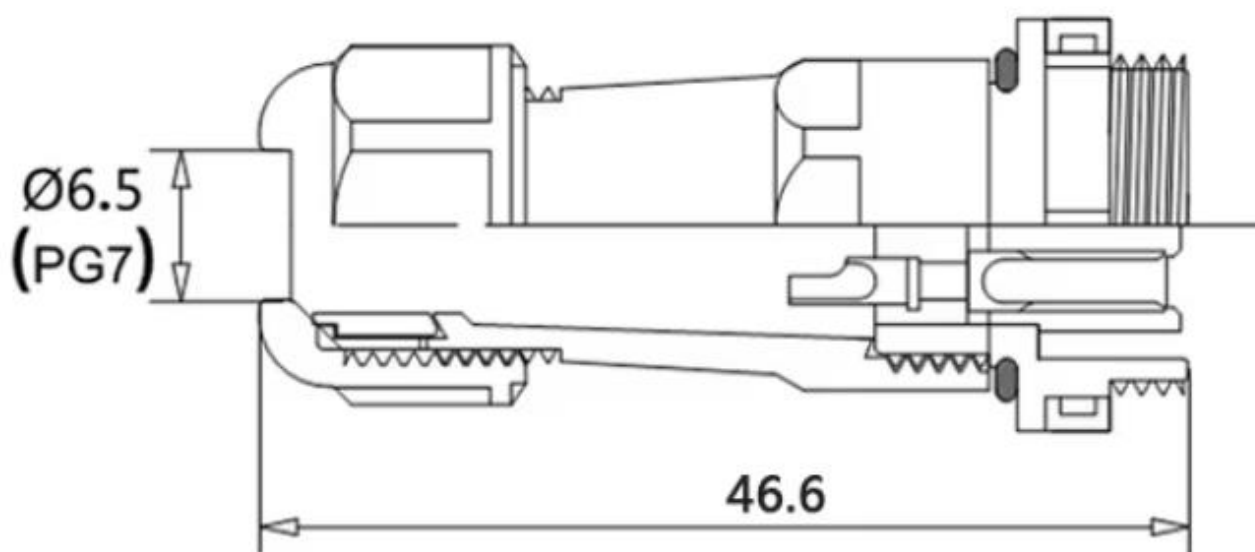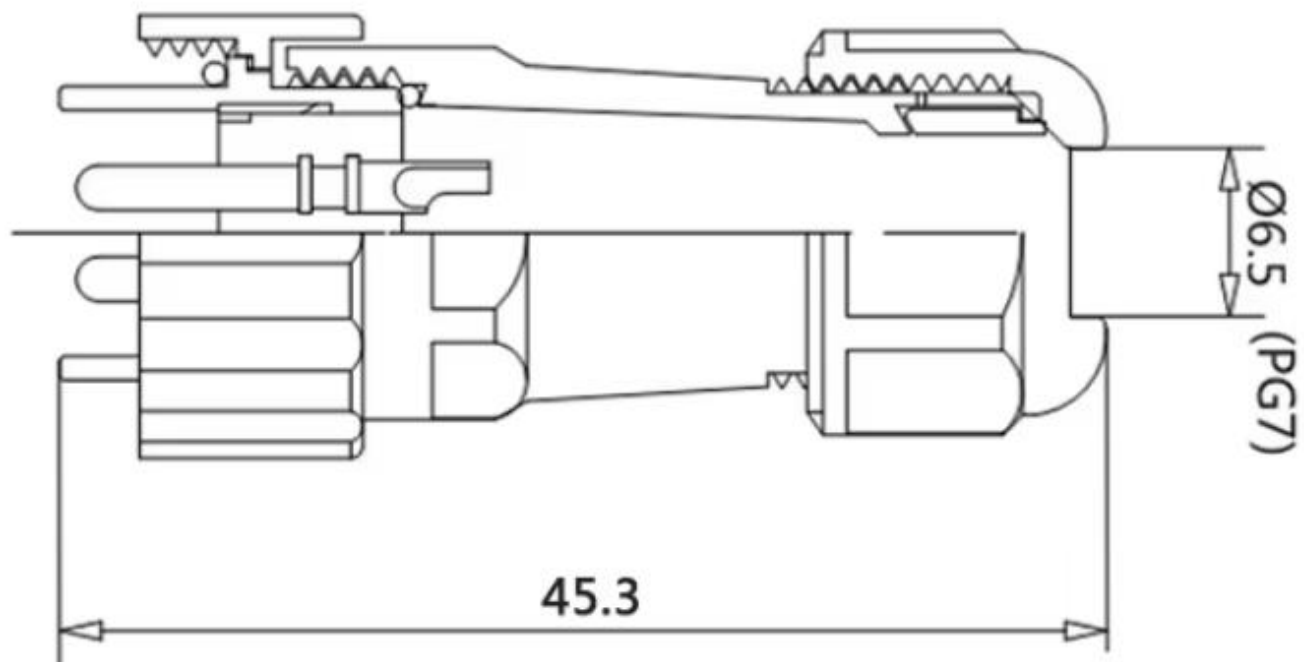

[illegible]