


Specifications


Nominal Voltage		12 V
Capacity (25°C)	10HR(10.5V)	60Ah
	5HR(10.2V)	46.8Ah
	1HR(9.6V)	34.9 Ah
Dimension	Length	230±2mm (9.06inch)
	Width	138±2mm(5.43inch)
	Height	209±2mm(8.22inch)
	Total Height	215±2mm(8.46inch)
Approx. Weight		16.5kg (36.3lbs)±4%
Terminal type		T5/T9
Internal resistance (Fully charged, 25°C)		Approx. 7.7mΩ
Capacity affected by temperature (10HR)	40°C	103%
	25°C	100%
	0°C	88%
	-15°C	70%
Self-discharge (25°C)	3 month	Remaining Capacity: 94%
	6 month	Remaining Capacity: 88%
	12 month	Remaining Capacity: 75%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 55°C (5°F ~ 131°F)
	Charge	-10°C ~ 55°C (14°F ~ 131°F)
	Storage	-20°C ~ 55°C (-4°F ~ 131°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.10 to 14.40V Temperature compensation: -30mV/°C
Maximum charging current		12.0A
Terminal material		Copper
Maximum discharge current		550A(5 sec.)
Designed floating life(20°C)		12 years



Dimensions

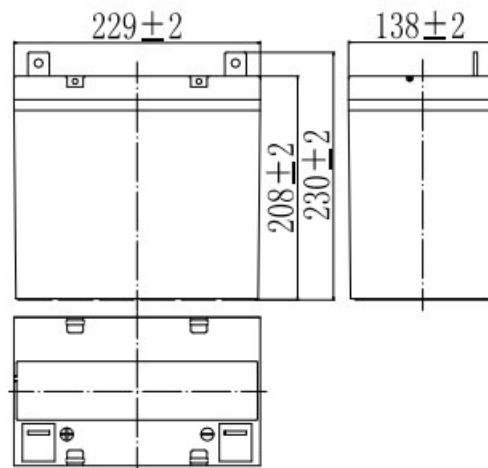

Terminal

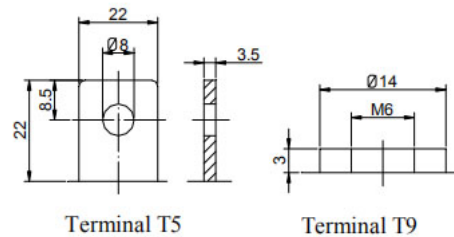

- ◆ Gelled electrolyte technology;
- ◆ PVC separator;
- ◆ Recognized by CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	129	100	60.6	37.6	21.9	15.3	12.5	10.7	7.34	6.11	3.21
9.90V	125	97.6	59.4	37.0	21.8	15.2	12.5	10.6	7.30	6.10	3.20
10.2V	120	94.0	57.6	36.1	21.6	15.1	12.4	10.6	7.25	6.08	3.19
10.5V	114	90.8	56.2	35.4	21.3	15.0	12.3	10.5	7.20	6.04	3.17
10.8V	108	86.0	54.1	34.3	20.7	14.6	11.9	10.2	6.98	6.00	3.15

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	1388	1098	680	428	254	180	148	127	87.2	72.9	38.5
9.90V	1346	1072	666	422	252	179	147	126	86.7	72.8	38.4
10.2V	1291	1032	646	411	250	178	146	125	86.1	72.6	38.3
10.5V	1235	997	630	403	246	176	145	124	85.5	72.1	38.1
10.8V	1166	944	607	391	240	171	140	120	83.0	71.6	37.8

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics(25°C)

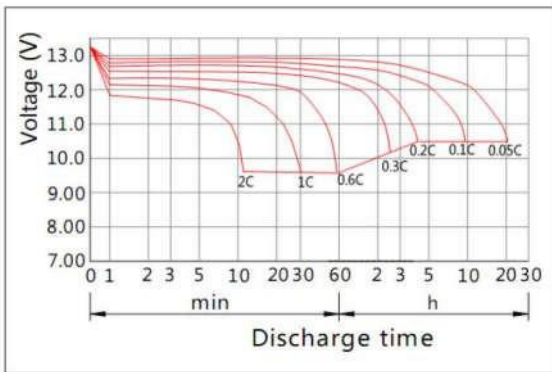


Charging Characteristics(25°C)

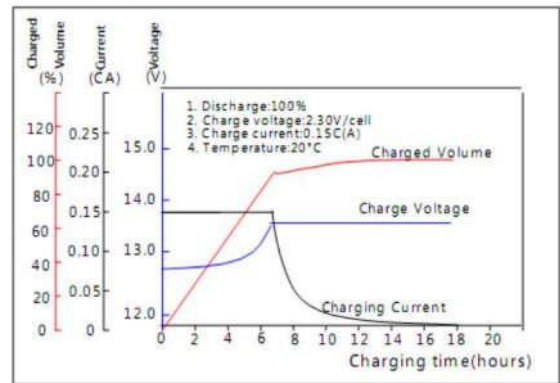


Effect of Temperature on Capacity

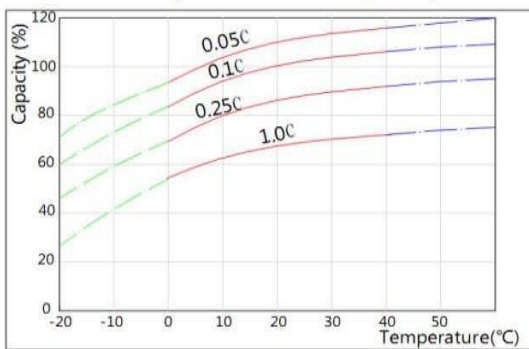


Self-discharge Characteristics

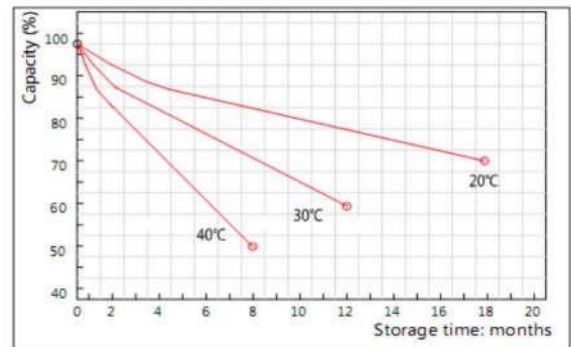


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

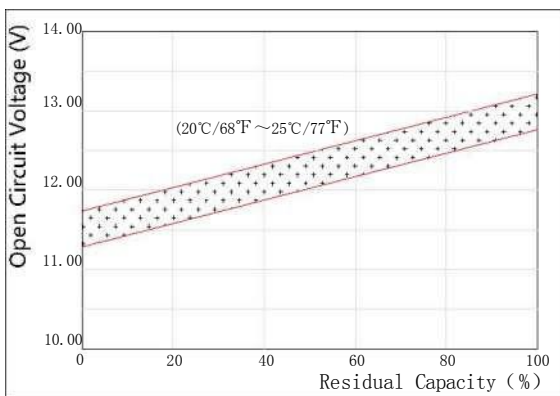

The Relationship for Charging Voltage and Temperature

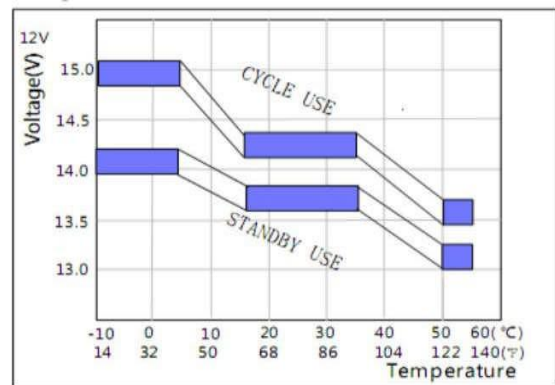

Floating Life on Temperature

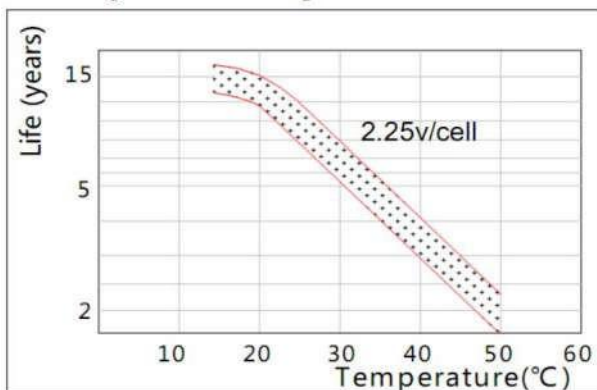

Cycle Life on D.O.D(25°C)

