


吸合状态

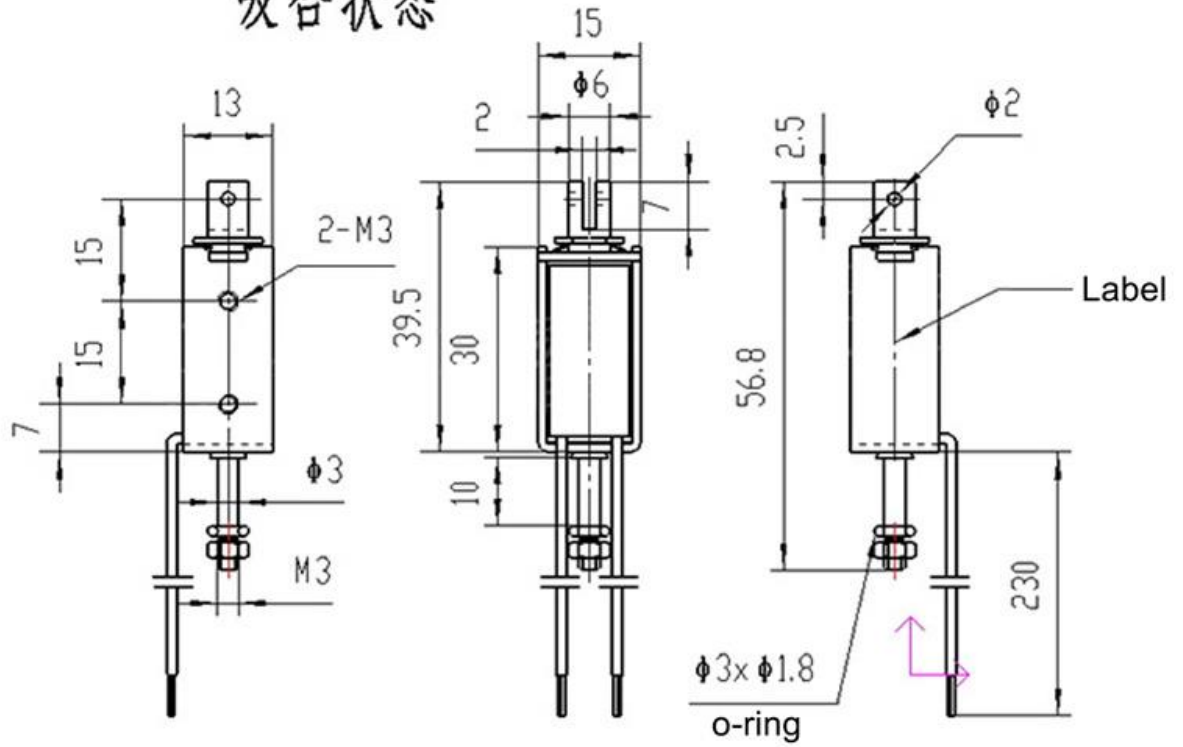

OQC Test report

OQC Test report			
TAU-0530T			
Rated voltage	6V	12V	24V
Rated current	3A	1.5A	0.7A
Coil resistance	2.5 Ω	7.6 Ω	29.2 Ω
Power	23W		
Stroke	10mm		
Initial force	0.4N (40g)		
Keep force	7N		
Pressure test	AC1200V		
Temperature rise detection	65 $^{\circ}$ C		
Service life	≥ 1000000 times		