



MILLISECOND SWITCHING



QUICK SWITCH



SOLAR SYSTEM



LOW ENERGY CONSUMPTION






HIGH PRECISION



FLAME RETARDANT MATERIAL

Standard	EN60898(IEC60898) IEC60947-2	Max. fuse that can be connected to	100AgL(>10kA)
Characteristic curve	C	Selective grade	3
Working ambient temperature	-10°C ~+40°C	Enclosed protective class	IP20
Electrical life	Not less than 8000 times	Mechanical life	Not less than 20000 times
Rated current	80A, 100A, 125A	Rated Breaking capacity	10KA

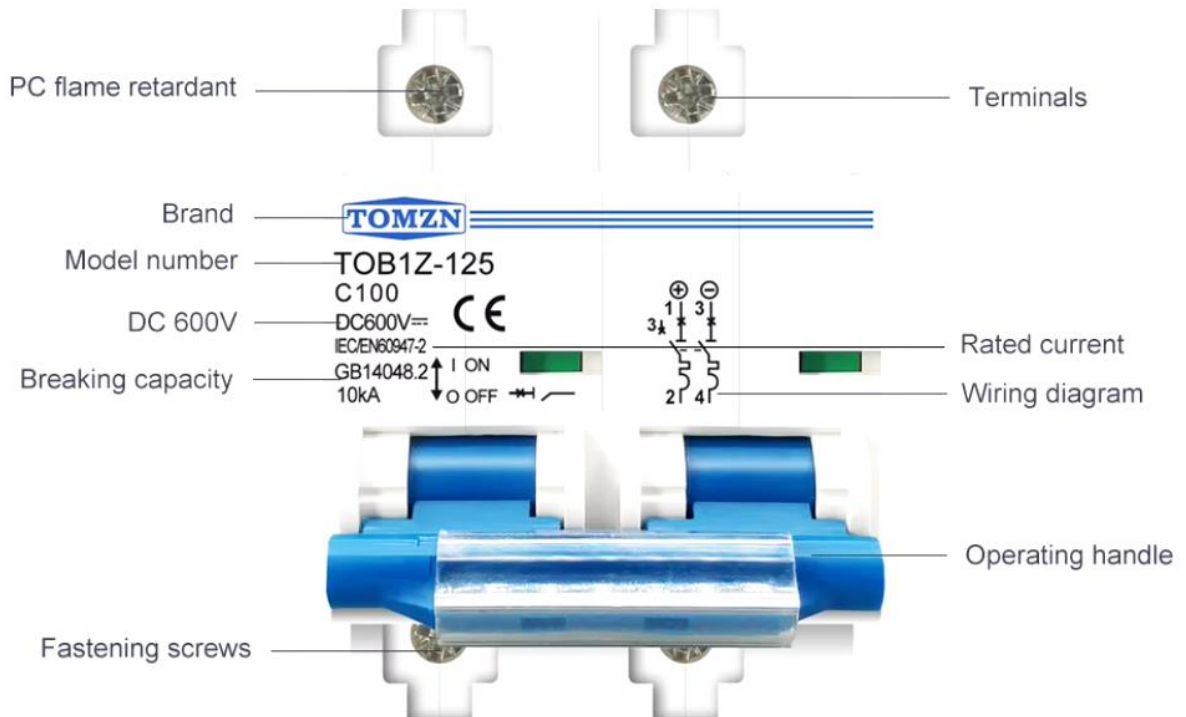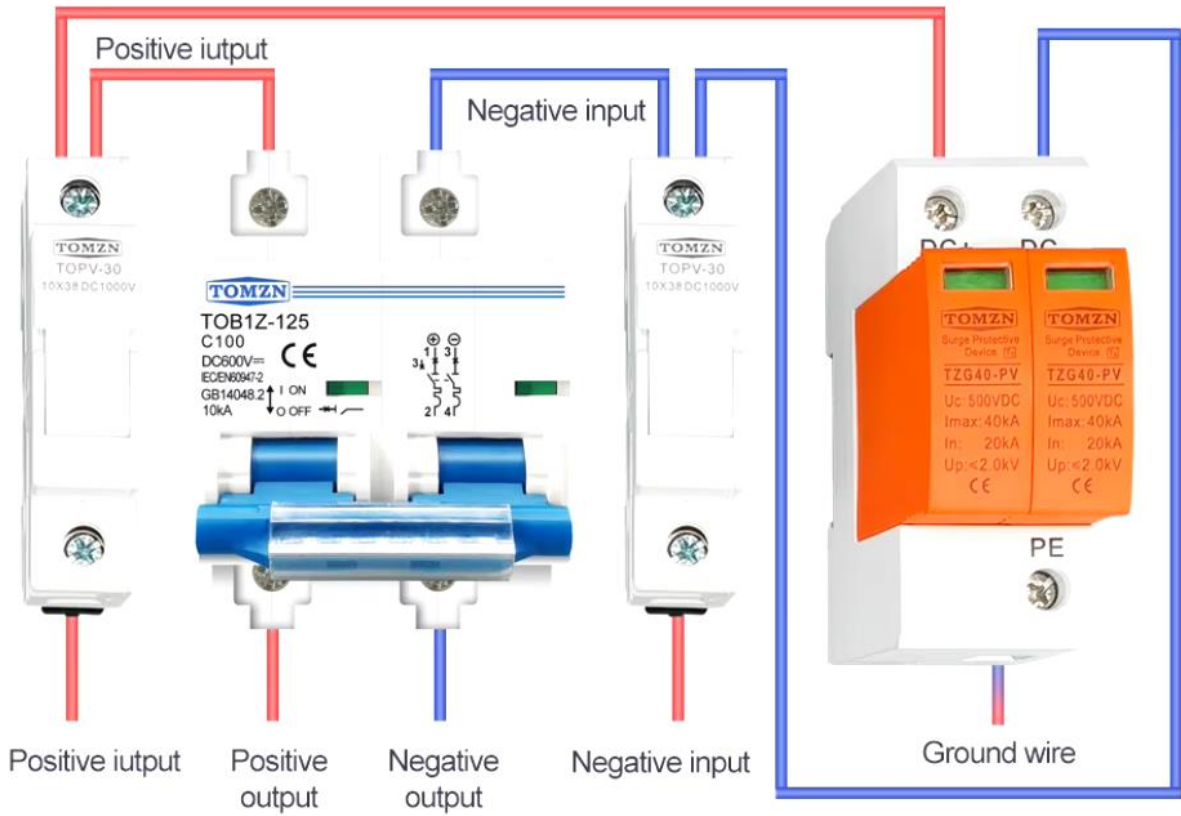

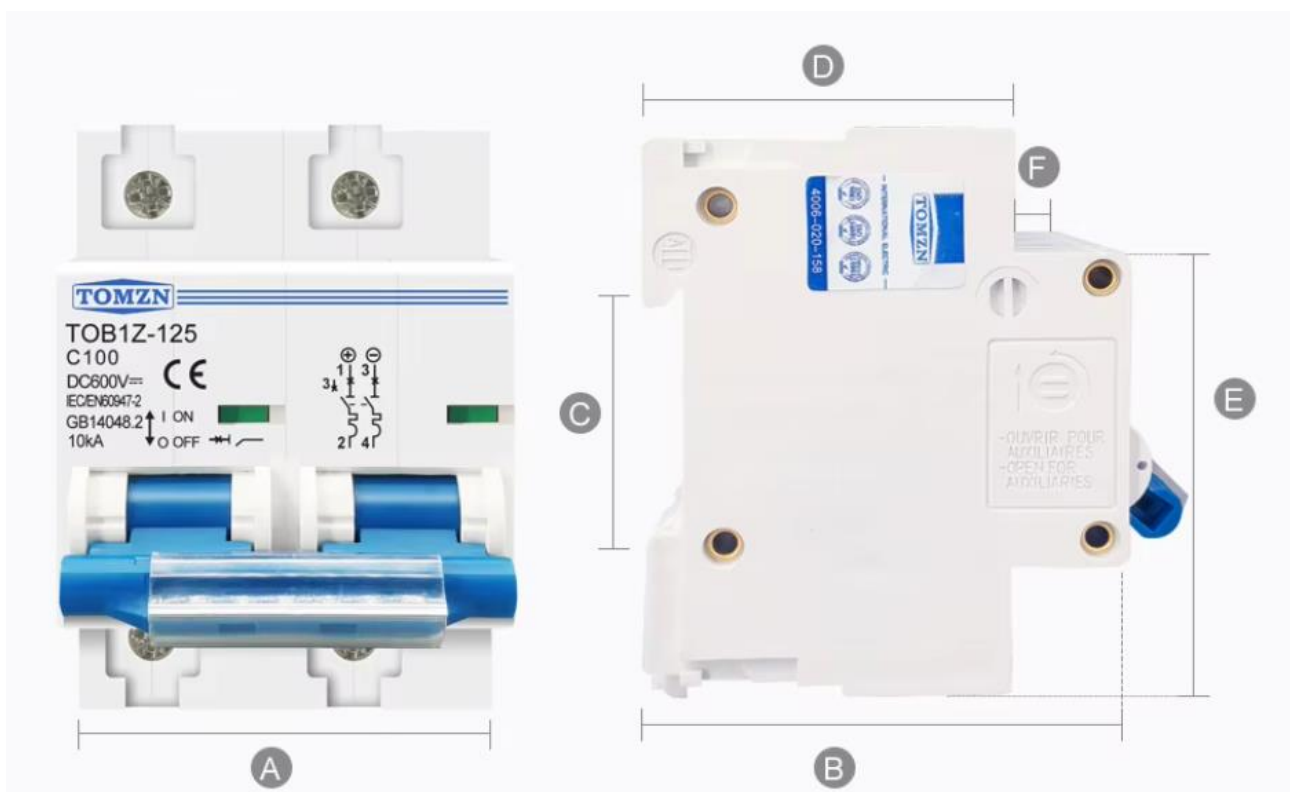

A Length (mm)	54
B Length (mm)	76
C Height (mm)	35.5

D Length (mm)	50
E Height (mm)	45
F Length (mm)	16