



1.SCHEMATICS.

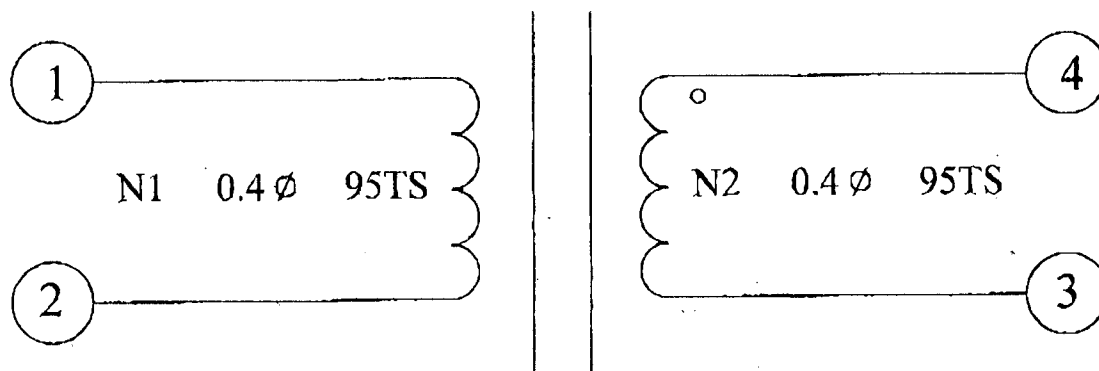

2.WINDING SEQUENCE.

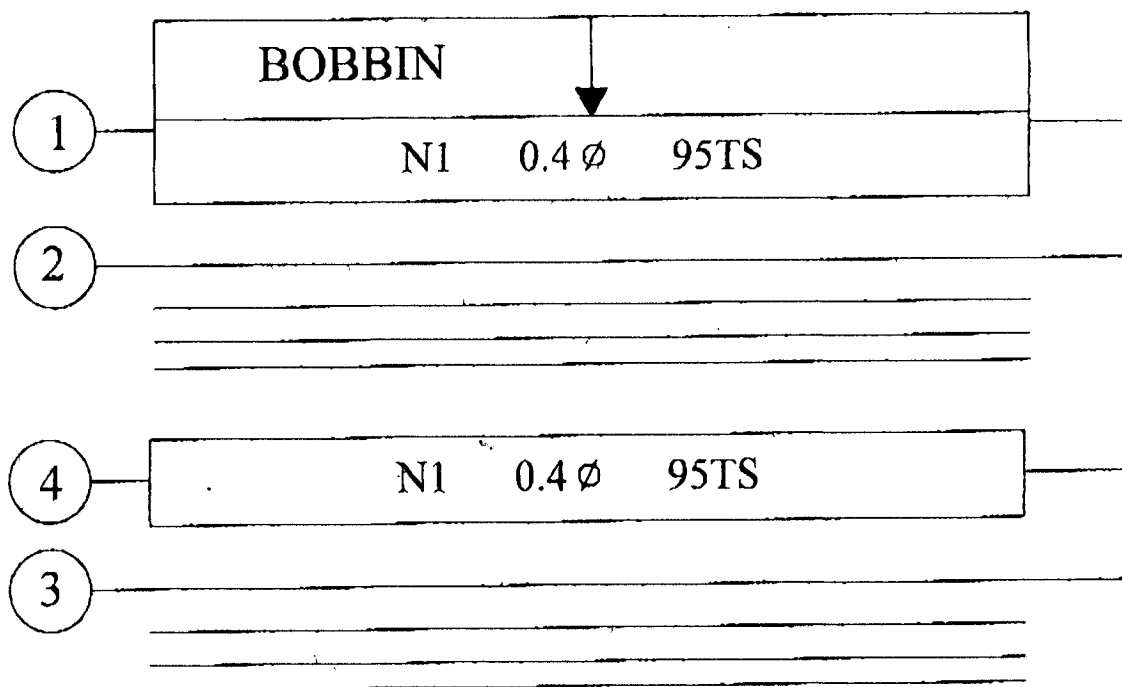


CUSTOMER: 烏克蘭(R.C.S)

APPROVED BY: 

PART NO. UU157-203

ISSUE: A

CHECKED BY: 

DATE: 2004-03-23

DRAWN BY: 張添娣



力英電子股份有限公司
LI TONE ELECTRONICS CO., LTD.
台北縣三峽鎮介壽路1段311巷29號
NO. 29, LANE 311, JIE SOU RU., SEC 1. SANHSIA
TOWAN TAIPEI HSIEN, TAIWAN R. O. C.

TEL:
(020)2673-2512-6
FAX:
886-2-26710294
886-2-26736329

3.MATERIAL LIST.

FAX 001

NO/ITEM	MATERIAL	SUPPLIER
1.CORE	UU15.7 FERRITE CORE HG103	HIGH TECHNOLOGY
2.BOBBIN	UU15.7 V.TYPE W/4PINS. PHENOLIC/T375J. SW-15.7B1	CHANG GHUN PLASTICS CO.,LTD. UL NO.E59481(S).
3.WIRE	DDNYU/2UEW/130° C.	PACIFIC ELECTRIC WIRE & CABLE CO.LTD. UL NO.E84081(S).
4.TAPE	POLYESTER TAPE. #1350.	MINNESOTA MINING & MFG 3M CO.,LTD. UL NO.E17385(N).
5.VARNISH	V-1630FS.	UNDERWOOD INDUSTRIES OF NEW YORK INC. UL NO.E60614(M).
6.CLIP	UU-15.7 HIGH CARBON STEEL.	SHEN SHEN INDUSTRIAL CO.,LTD.

4.ELECTRICAL SPECIFICATIONS .

4-1.INDUCTANCE. P(1-2) 20mH MIN. @1 KHZ 0.25V HP-4284A.
P(4-3) 20mH MIN.

4-2.D.C.RESISTANCE. P(1-2) 0.6 OHM MAX. BY GOM-801G
P(4-3) 0.6 OHM MAX.

4-3.RATED CURRENT: 2A MAX.

CUSTOMER: 烏克蘭(R.C.S)

APPROVED BY:

PART NO. UU157-203

ISSUE: A

CHECKED BY:

DATE: 2004-03-23

DRAWN BY: 張添娣






力英電子股份有限公司
LI TONE ELECTRONICS CO., LTD.
台北縣三峽鎮介壽路1段311巷29號
NO. 29, LANE 311, JIE SOU RU., SEC 1. SANHSIA
TOWAN TAIPEI HSIEN, TAIWAN R. O. C.





TEL:
(02)2673-2512-6

FAX:
886-2-26710294
886-2-26736329

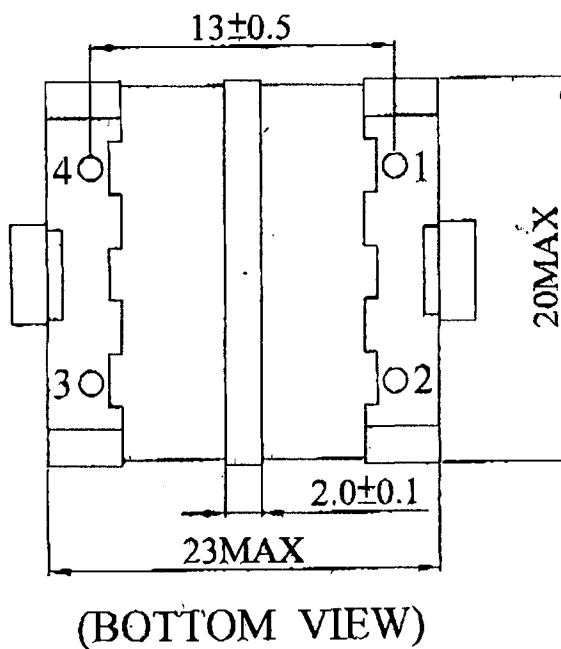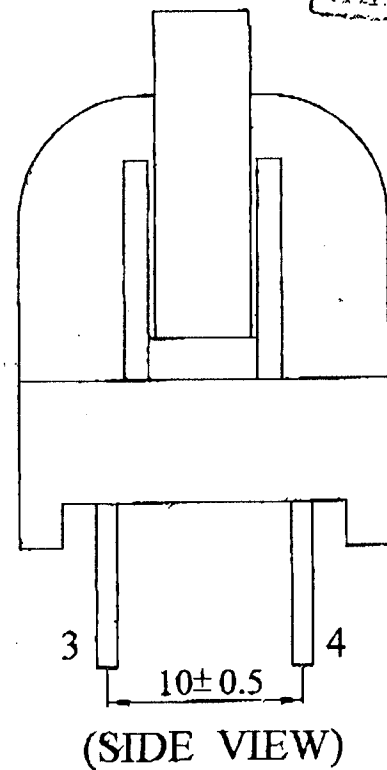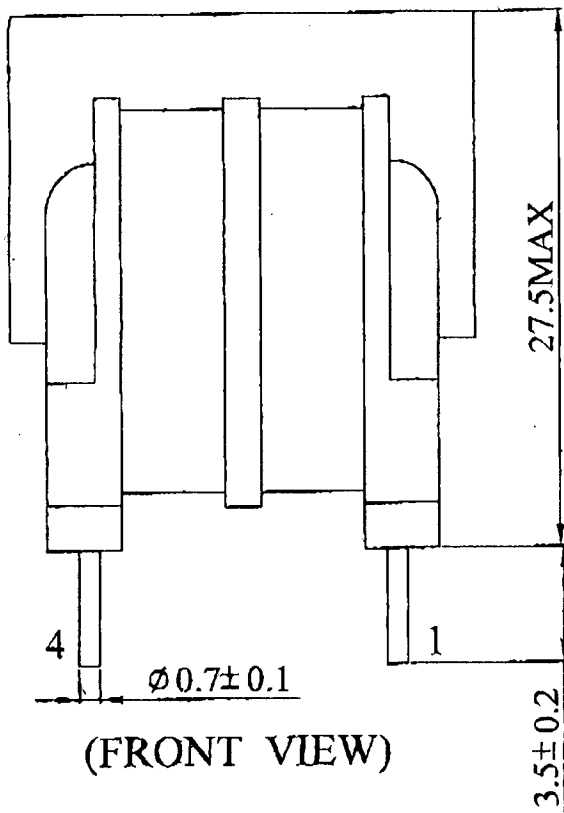5. CONFIGURATION & DIMENSION. (UNIT:mm)



*PIN 1. 點白點.

CUSTOMER: 烏克蘭(R.C.S)		APPROVED BY: 	
PART NO. UU157-203	ISSUE: A	CHECKED BY: 	
DATE: 2004-03-23		DRAWN BY: 張添娣	
 		力英電子股份有限公司 LI TONE ELECTRONICS CO., LTD. 台北縣三峽鎮介壽路1段311巷29號 NO. 29, LANE 311, JIE SOU RU., SEC 1. SANHSIA TOWAN TAIPEI HSIEN, TAIWAN R. O. C.	
		TEL: (02)2673-2512-6 FAX: 886-2-26710294 886-2-26736329	