

Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers; Max. operating temperature 85°C - Item No.: 221-412

WAGO® online catalog / eShop

COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers; Max. operating temperature 85°C

Item No.: 221-412



COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers; Max. operating temperature 85°C

Marking

RoHS ✓
Compliant

Business data

| | |
|----------------------|---------------|
| Supplier | WAGO |
| Item no. | 221-412 |
| GTIN / EAN | 4050821808435 |
| Content | 1 |
| Order amount | 100 |
| Customer item number | |

Notes

Technical data

Miscellaneous

| | |
|-----------------------------------|-------------|
| Total number of connection points | 2 |
| Total number of potentials | 1 |
| Color | transparent |
| Ratings according to 1 | EN 60664 |
| Pollution degree (1) | 2 |
| Rated voltage EN (1) [V] | 450 [V] |
| Rated surge voltage (1) [kV] | 4 [kV] |
| Nominal current [A] | 32 [A] |

Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers;
 Max. operating temperature 85°C - Item No.: 221-412

| Technical data | |
|-------------------------------|--|
| Connection technology (1) | CAGE CLAMP® |
| Nominal cross section 1 | 4 mm ² |
| Solid sizes 1 | 0.2 ... 4 mm ² / 24 ... 12 AWG |
| stranded, connectable 1 | 0.2 ... 4 mm ² / 24 ... 12 AWG |
| Fine-stranded wires 1 | 0.14 ... 4 mm ² / 24 ... 12 AWG |
| Strip length 1 | 11 mm / 0.43 in |
| Type of wiring | Side-entry wiring |
| Flammability rating per UL 94 | V2 |
| Fire load [MJ] | 0.026 [MJ] |
| Weight [g] | 1.6 [g] |
| Width | 13.1 mm / 0.516 in |
| Height | 8.3 mm / 0.327 in |
| Length | 18.6 mm / 0.732 in |
| Safety information 1 | In grounded power lines |

| Approbation | | | | | |
|-------------|--------------|------------------|-------------|-------------|---------------------------------------|
| Item No. | Registration | Registration no. | Voltage [V] | Current [A] | Cross section [mm ² , AWG] |
| 221-412 | CCA | 2168803.01 | 450 | 32 | 0.20-4.00 |


Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers;
Max. operating temperature 85°C - Item No.: 221-412

Images & drawings



Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers;
Max. operating temperature 85°C - Item No.: 221-412



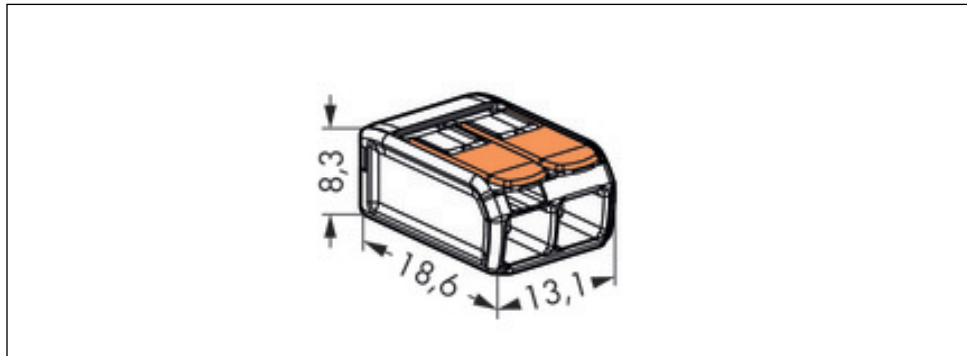

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.