


Model	ZGT-120DA/150DA
Control Voltage	3~32VDC
Min Control Current	5mA
Max Control Current	25mA
Load Voltage	24-480VAC
Load Current	120A/150A
Insulation Resistance	1000M Ohm/ 500VDC
Off Leakage Current	<=2mA
On Voltage	<=1.5V
On-off Time	<=10ms
Ambient Temperature	-20~+75 °C
Mounting Method	Screw fixed



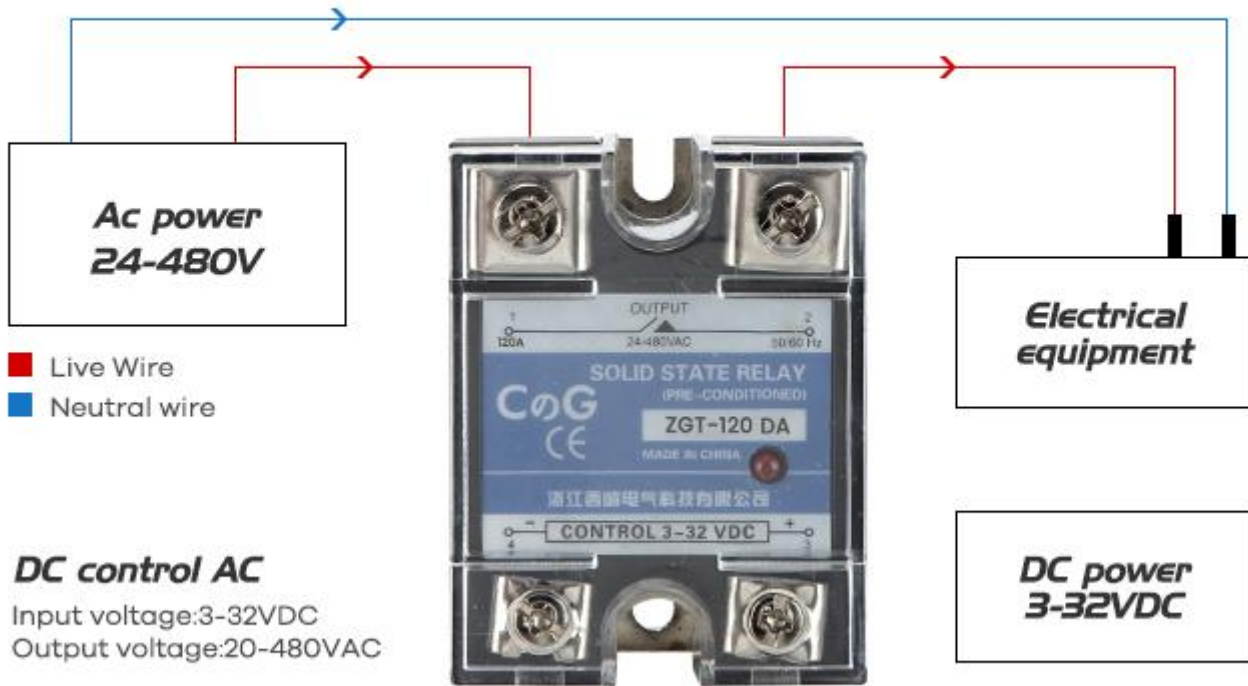

**All copper output terminal**

Full copper terminal output, low current resistance, excellent electrical conductivity.



**Flame-retardant protective case**

Flame-retardant protective cover is resistant to high temperature and dustproof, and has good sealing performance.

**Thick brass heat sink**

Use copper heat sink to quickly and effectively dissipate heat, safe and stable.

