
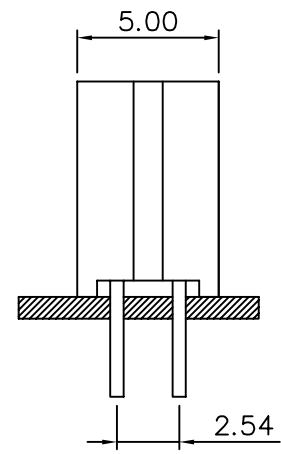
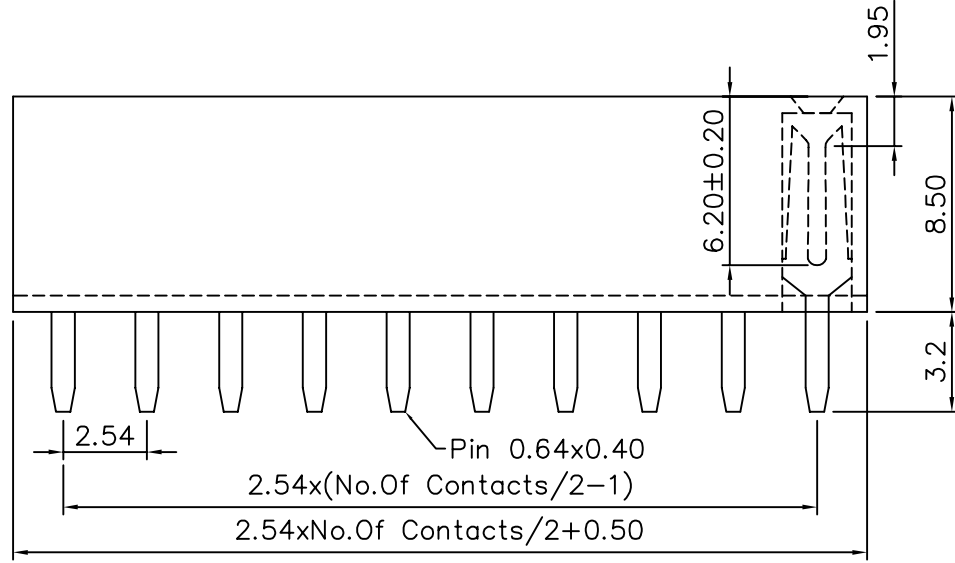


**SPECIFICATIONS**  
 Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms Min.  
 Contact Resistance: 20 Milliohms Max.  
 Dielectric Withstanding: 1000V AC.  
 Operating Temperature: -40°C To +105°C  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: PBT  
 Contact Material: Phosphor Bronze  
 Gold Flash All Over

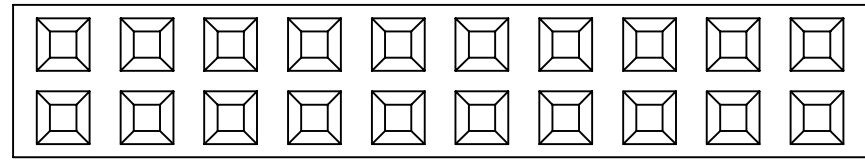

**AUK** A NUMBER OF AUK GROUP  
 太聯事業股份有限公司  
 AUK CONTRACTORS CO., LTD.

DRAWING No.  
FD2X04

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE REV. A

UNIT mm

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------