



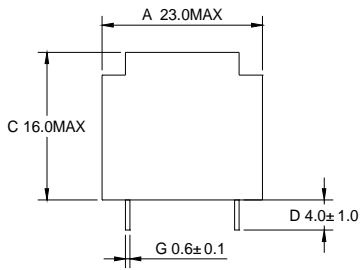


TR Z00.35/12b II

OUTLINE DRAWING: UNIT: mm

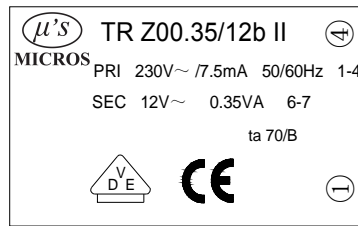

SCHEMATIC:

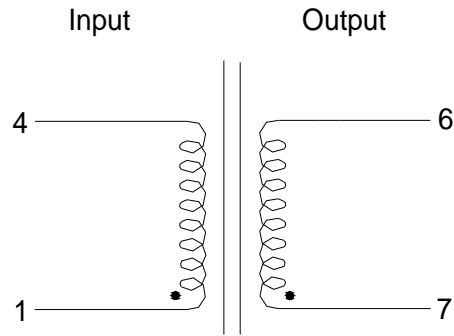

ELECTRICAL SPECIFICATION:

ITEM	TERMINAL	SPECIFICATION	TEST CONDITION	TEST INSTRUMENTS
EXCITATION CURRENT (mA)	1-4	13.5 MAX	Input: (1--4) 230V / 50Hz	GDW 4033A
LOSS POWER (W)	1-4	1.7 MAX		
Load Voltage (V)	6-7	$12 \pm 10\% @ 29mA$		
No-Load Voltage (V)	6-7	19 Max		
RESISTANCE (Ω)	1-4	$14000 \pm 10\%$	Ta=25°C	TH2512B
	6-7	$131 \pm 15\%$		
INSULATION RESISTANCE	P--S	$100M\Omega$ MIN	DC500V /1min	CS5603
HI-POT	P--S	4200V 1mA 1s	50Hz	