
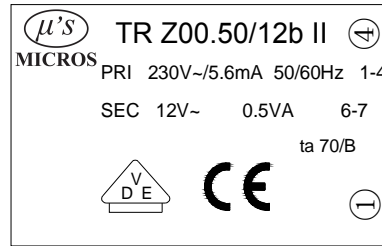
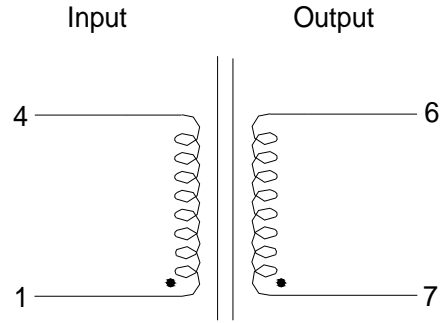





# TR Z00.50/12b II

## OUTLINE DRAWING UNIT: mm

## SCHEMATIC:

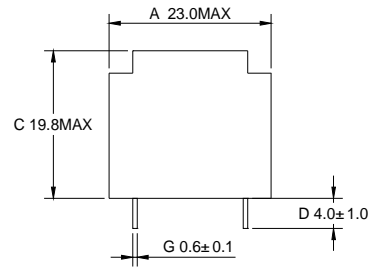

## ELECTRICAL SPECIFICATION:

ITEM	TERMINAL	SPECIFICATION	TEST CONDITION	TEST INSTRUMENTS
EXCITATION CURRENT (mA)	1-4	11 MAX	Input: (1--4) 230V / 50Hz	GDW 4033A
LOSS POWER (W)	1-4	0.9 MAX		
Load Voltage (V)	6-7	12 ±10% @ 42mA		
No-Load Voltage (V)	6-7	19.8 Max		
RESISTANCE (Ω)	1-4	11000±10%	Ta=25°C	TH2512B
	6-7	80±15%		
INSULATION RESISTANCE	P--S	100MΩ MIN	DC500V /1min	CS5603
HI-POT	P--S	4200V 1mA 1s	50Hz	