

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. Violation will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商标权、专利权、著作权等权利外，本公司保留所有权利。 未经授权，不得复制或传播本文件内容。 违反者将承担法律责任。 所有权利保留。

FOR-1755 Rev.1.7

2

3






4

5


6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

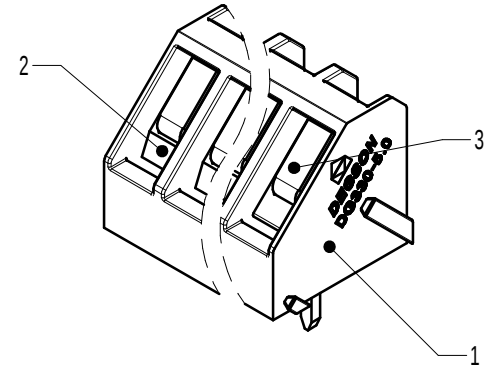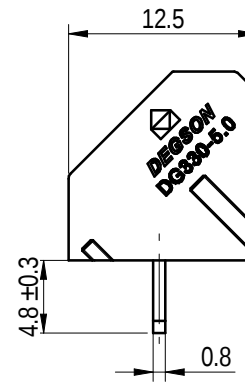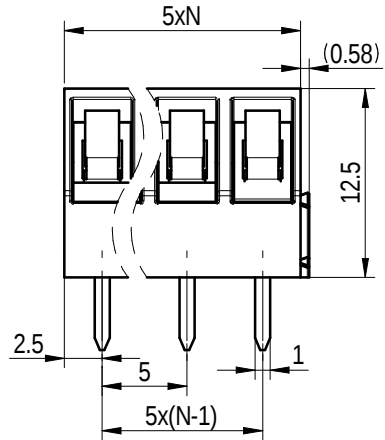

PCB LAYOUT

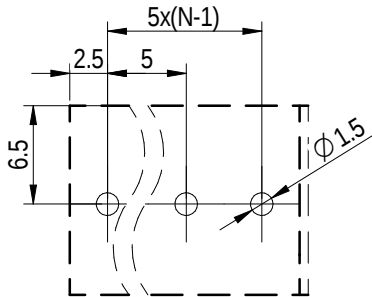

4	Screw	Steel	M2.5/Zn_plated
3	Pin_header	Copper alloy	Sn_plated
2	Cage	Copper alloy	M2.5/Ni_plated
1	Housing	Nylon	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	250/24	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	2	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.5, 0.4/3.54	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		22~12 / 0.5~2.5	
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~24P	
剥线长度/Stripping length(mm)		4~5	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	



MATERIAL:	SURFACE/COLOR:
MAT NO./REV: 10040003189-1 / 00	MAT STATUS: 批量

APPD:	NAME
CHKD:	DG330-5.0-02P-11-00A&Z(H)

DRFT:	DRAWING NO. 200123619	TYPE CUSTOMER DRAWING	DRAWING STATUS work	SCALE 2:1	SHEET 1/1
-------	-----------------------	-----------------------	---------------------	-----------	-----------

00	ECN	DESCRIPTION	DRFT	DATE
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6