

9.2mm (0.36INCH) DUAL DIGIT NUMERIC DISPLAY

P/N: DA36-11GWA

GREEN


Features

- ●0.36 INCH DIGIT HEIGHT.
- •LOW CURRENT OPERATION.
- •EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- ●TWO DIGIT PACKAGE SIMPLIFIES ALIGNMENTS & ASSEMBLY.
- ●I.C. COMPATIBLE.
- •MECHANICALLY RUGGED.
- •STANDARD: GRAY FACE, WHITE SEGMENT.
- ●RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

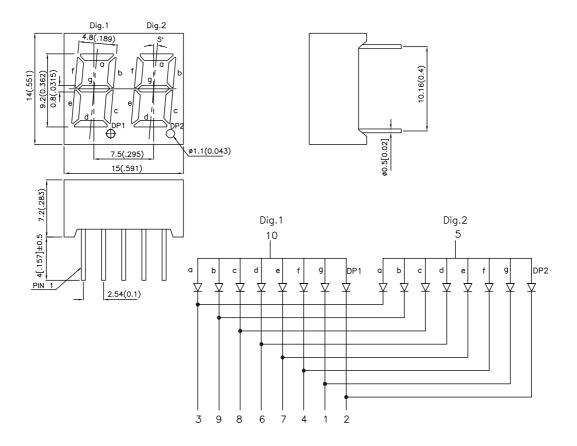

Notes

1. All dimensions are in millimeters (inches), Tolerance is $\pm 0.25 (0.01")$ unless otherwise noted.

Specifications are subject to change without notice.

SPEC NO: DSAB6915 REV NO: V.2 DATE: NOV/18/2005 PAGE: 1 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: Y.L.LI

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (ucd) @ 10mA		Description	
			Min.	Тур.	•	
DA36-11GWA	GREEN(GaP)	WHITE DIFFUSED	1900	4700	Common Anode,Rt. Hand Decimal.	

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	I=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
IR	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at Ta=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	ture [2] 260°C For 5 Seconds			


Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

SPEC NO: DSAB6915 REV NO: V.2 DATE: NOV/18/2005 PAGE: 2 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: Y.L.LI


Kingbright

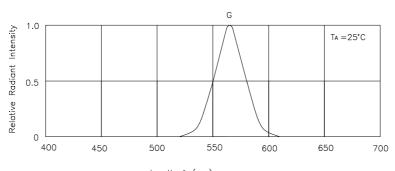



wavelength λ (nm) RELATIVE INTENSITY Vs. WAVELENGTH


Green

DA36-11GWA









Remarks:

If special sorting is required (e.g. binning based on forward voltage, Luminous intensity/ luminous flux, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity/ Luminous Flux: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAB6915 REV NO: V.2 DATE: NOV/18/2005 PAGE: 3 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: Y.L.LI