

# TERMINAL BLOCK Connector



## Screwless Series

KLS2-141R-2.54 Series Pitch=2.54mm

### Electrical :



Rated voltage: 150V  
 Rated current: 6A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: AC1500V/1Min  
 Wire range: 26-20AWG 1.5MM<sup>2</sup>

### Material

Pin header: Brass, Tin plated  
 Housing: PA66, UL94V-0  
 Wire guard: Stainless steel

### Mechanical

Temp. Range: -40°C~+105°C  
 MAX Soldering: +250°C for 5 Sec.  
 Strip length: 11mm

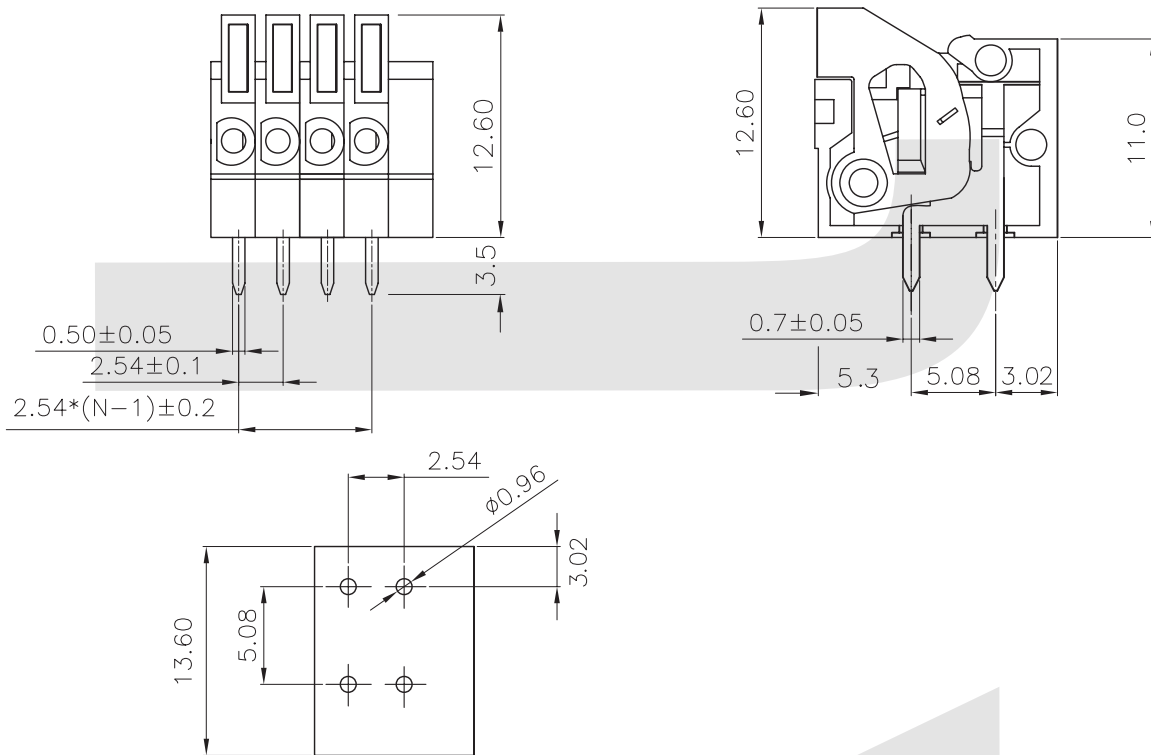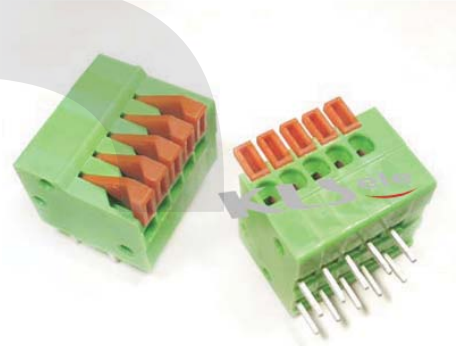

P. C. B. LAYOUT

## ORDER INFORMATION

Product NO.: KLS2-141R-2.54-XXP X X

Pos. NO.	_____	_____	_____	_____	_____	_____	_____	_____	_____	
Series No.	_____	_____	_____	_____	_____	_____	_____	_____	_____	
Pitch:	2.54=2.54mm	_____	_____	_____	_____	_____	_____	_____	_____	
Number of Pole	_____	_____	_____	_____	_____	_____	_____	_____	_____	
								Customer Request		
								Color: 1=Gray	2=Blue	3=Black
								4=Green	5=Orange	6=Red
								7=Transparent	8=Yellow	9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information