

TERMINAL BLOCK Connector

Screwless Series

KLS2-3.50V-5.00 Series Pitch=3.50mm

Electrical :


Rated voltage: 300V
Rated current: 6A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1600V/1Min
Wire range: 20~16AWG 0.5~0.75MM²

Material

Pin header: Phosphor bronze, Tin plated
Housing: PA66, UL94V-0
Wire guard: Stainless steel

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec.
Strip length: 8.5~9.5mm

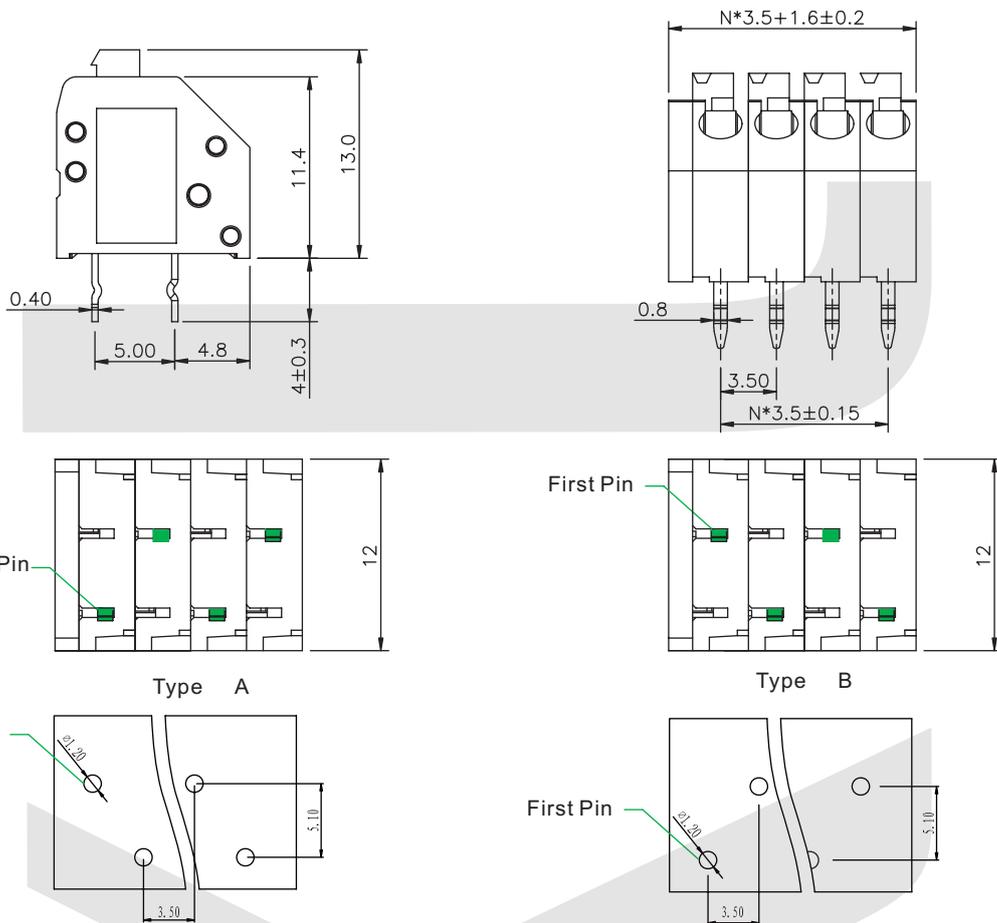

ORDER INFORMATION

Product NO.: KLS2-3.50V-5.00-XXP-1 A

Pos. NO. _____
Series No. _____
Number of Pole _____

Pin Type: A-Type A B-Type B
Color: 1=Gray
 4=Green
 5=Orange