

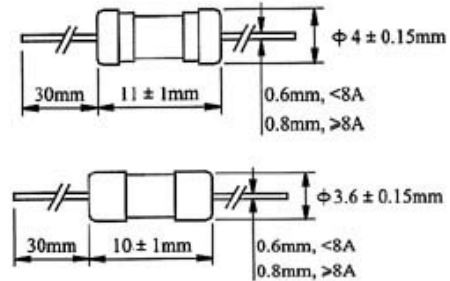


Product Model	Rated Current	Mv Voltage Drop	Voltage Rated	Product Model	Rated Current	Mv Voltage Drop	Voltage Rated
1010-0100	100mA	1750	125V/250V	1009-0100	100mA	1750	125V/250V
1010-0125	125mA	1500	125V/250V	1009-0125	125mA	1500	125V/250V
1010-0150	150mA	1500	125V/250V	1009-0150	150mA	1500	125V/250V
1010-0160	160mA	1500	125V/250V	1009-0160	160mA	1500	125V/250V
1010-0200	200mA	1500	125V/250V	1009-0200	200mA	1500	125V/250V
1010-0250	250mA	1000	125V/250V	1009-0250	250mA	1000	125V/250V
1010-0300	300mA	1000	125V/250V	1009-0300	300mA	1000	125V/250V
1010-0400	400mA	1000	125V/250V	1009-0400	400mA	1000	125V/250V
1010-0500	500mA	1000	125V/250V	1009-0500	500mA	1000	125V/250V
1010-0600	600mA	900	125V/250V	1009-0600	600mA	900	125V/250V
1010-0700	700mA	500	125V/250V	1009-0700	700mA	500	125V/250V
1010-0750	750mA	500	125V/250V	1009-0750	750mA	500	125V/250V
1010-0800	800mA	275	125V/250V	1009-0800	800mA	275	125V/250V
1010-1000	1A	275	125V/250V	1009-1000	1A	275	125V/250V
1010-1200	1.2A	275	125V/250V	1009-1200	1.2A	275	125V/250V
1010-1250	1.25A	275	125V/250V	1009-1250	1.25A	275	125V/250V
1010-1500	1.5A	275	125V/250V	1009-1500	1.5A	275	125V/250V
1010-1600	1.6A	275	125V/250V	1009-1600	1.6A	275	125V/250V
1010-1800	1.8A	275	125V/250V	1009-1800	1.8A	275	125V/250V
1010-2000	2A	250	125V/250V	1009-2000	2A	250	125V/250V
1010-2500	2.5A	250	125V/250V	1009-2500	2.5A	250	125V/250V
1010-3000	3A	250	125V/250V	1009-3000	3A	250	125V/250V
1010-3150	3.15A	250	125V/250V	1009-3150	3.15A	250	125V/250V
1010-3500	3.5A	250	125V/250V	1009-3500	3.5A	250	125V/250V
1010-4000	4A	225	125V/250V	1009-4000	4A	225	125V/250V
1010-5000	5A	225	125V/250V	1009-5000	5A	225	125V/250V
1010-6000	6A	225	125V/250V	1009-6000	6A	225	125V/250V
1010-6300	6.3A	200	125V/250V	1009-6300	6.3A	200	125V/250V
1010-7000	7A	200	125V/250V	1009-7000	7A	200	125V/250V
1010-8000	8A	200	125V/250V	1009-8000	8A	200	125V/250V
1010-10000	10A	200	125V/250V	1009-10000	10A	200	125V/250V
1010-12000	12A	180	125V/250V	1009-12000	12A	180	125V/250V
1010-15000	15A	180	125V/250V	1009-15000	15A	180	125V/250V

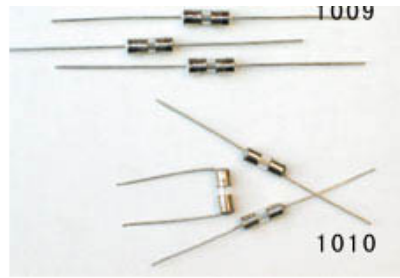

I-T CHARACTERISTICS CURVE
电流-时间曲线图

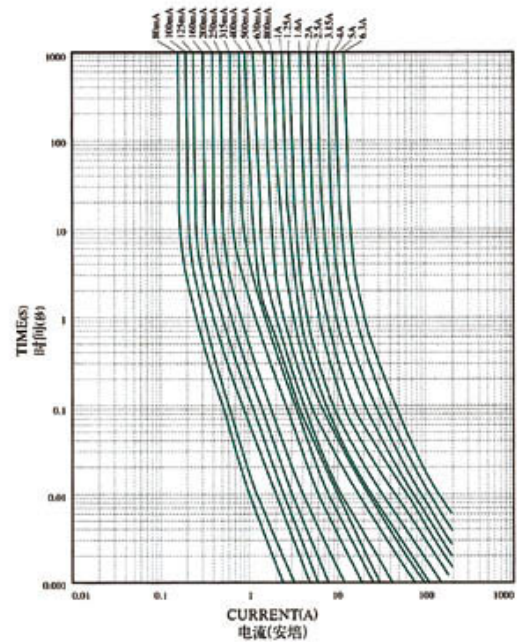

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max (最慢)	2min
	Min (最快)	400ms
2.75In	Max (最慢)	10sec
	Min (最快)	150ms
4In	Max (最慢)	3sec
	Min (最快)	20ms
10In	Max (最慢)	150ms
	Min (最快)	