


NPN Transistor

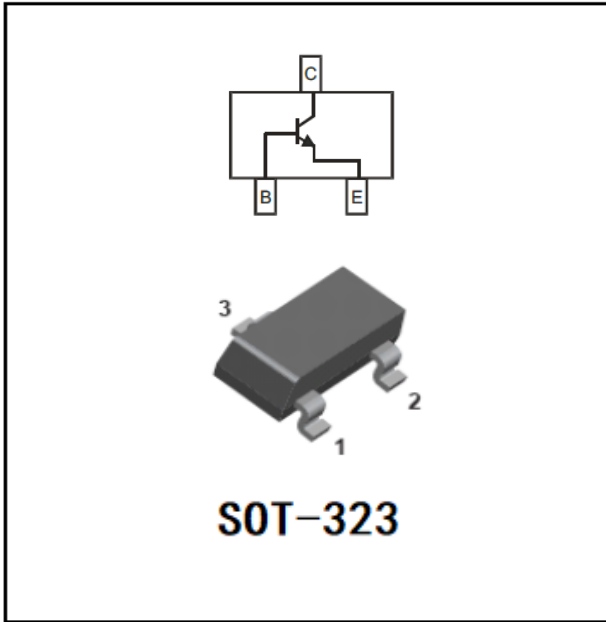

Features

- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion

Mechanical Data

- **Package:** SOT-323
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** K3P

■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	BVCBO	V	75
Collector-Emitter Voltage	BVCEO	V	40
Emitter-Base Voltage	BVEBO	V	6
Collector Current -Continuous	IC	mA	600
Total Device Dissipation	PD	mW	200
Junction Temperature	Tj	°C	150
Storage Temperature	TSTG	°C	-55 to +150

■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	IC=10uA, IE=0	75		
Collector-emitter breakdown voltage	$V_{(BR)CEO^*}$	V	IC =10mA, IB=0	40		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	IE=10μA, IC=0	6		
Collector cut-off current	ICEX	nA	VCE=60V, VBE=3V			10
Base cut-off current	ICBO	nA	VCE=60V, IC=0			100
Emitter cut-off current	IEBO	nA	VEB=3 V, IC=0			100
DC current gain	hFE		VCE=10V, IC=0.1mA	20		











	h_{FE}		VCE=10V, IC=1mA	40	
	h_{FE}		VCE=10V, IC=10mA	80	
	h_{FE}		VCE=10V, IC=150mA	100	300
	h_{FE}		VCE=10V, IC=500mA	40	
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	IC=150mA, IB=15mA		0.3
Base-emitter saturation voltage	$V_{BE(sat)}$	V	IC=150mA, IB=15mA	0.6	1.2
Transition frequency	f_T	MHz	VCE=20V, IC=20mA, f=100MHz	300	
Delay time	td	ns	VCC=30V, VBE(off)=-0.5V IC=150mA, IB1=15mA		15
Rise time	tr	ns			25
Storage time	ts	ns	VCC=30V, IC=150mA, IB1=IB2=15mA		225
Fall time	tf	ns			60

■ Ordering Information (Example)

Prefered P/N	Packing Code	Unit Weight(G)	Minimum Package(Pcs)	Inner Box Quantity(Pcs)	Outer Carton Quantity(Pcs)	Delivery Mode
MMST2222A	F2	Approximate 0.005	3000	30000	120000	7" reel


■ Characteristics (Typical)

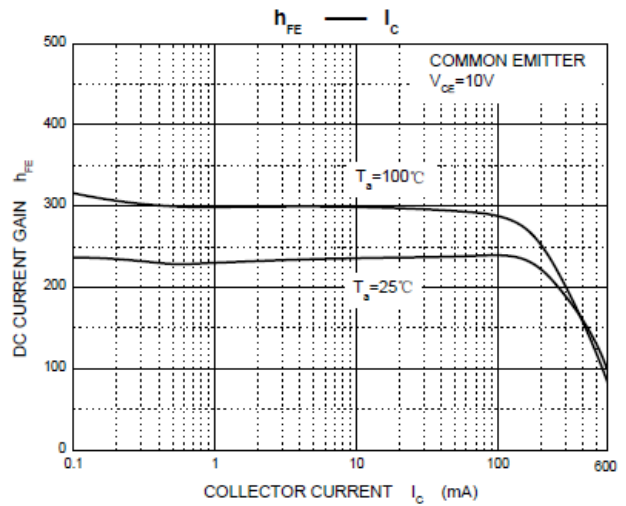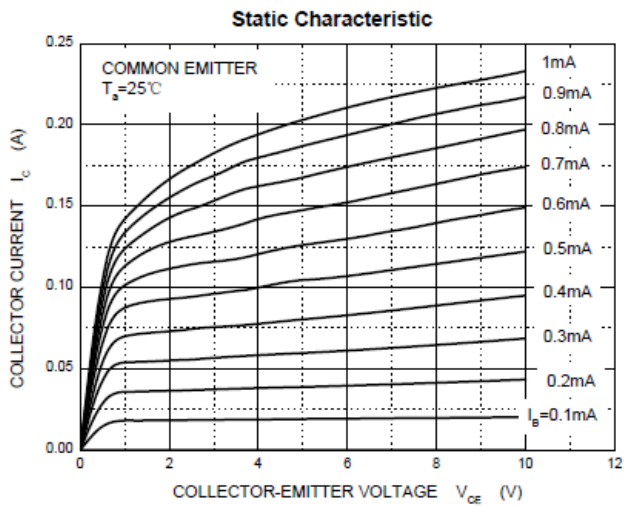

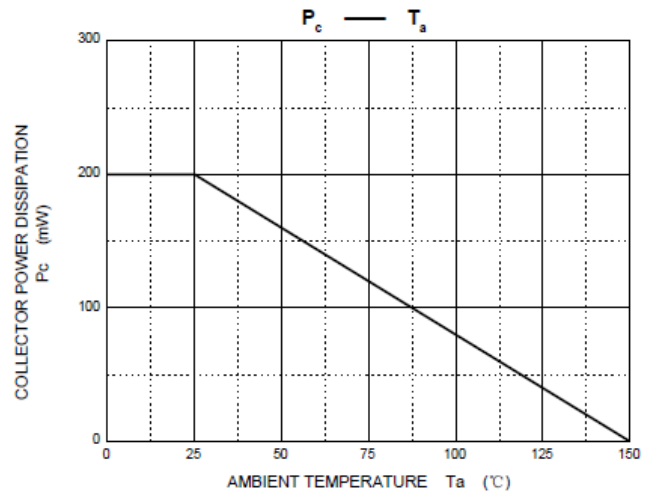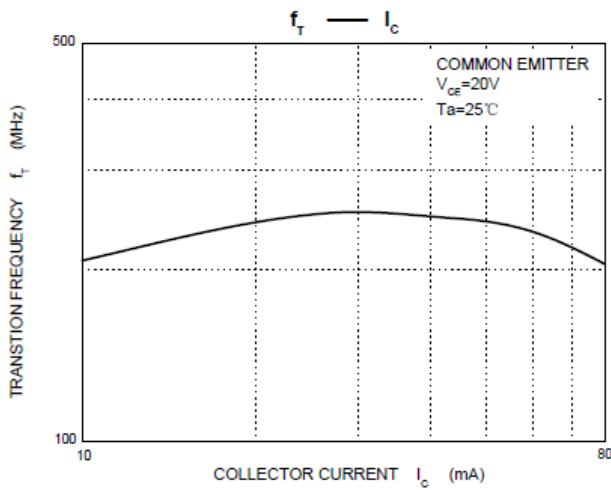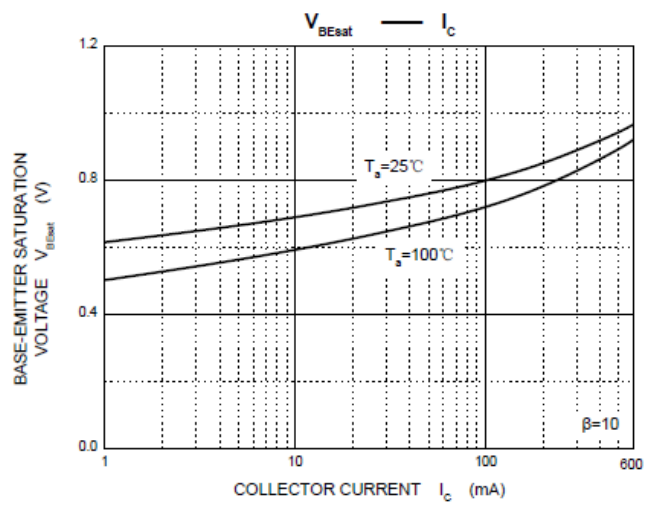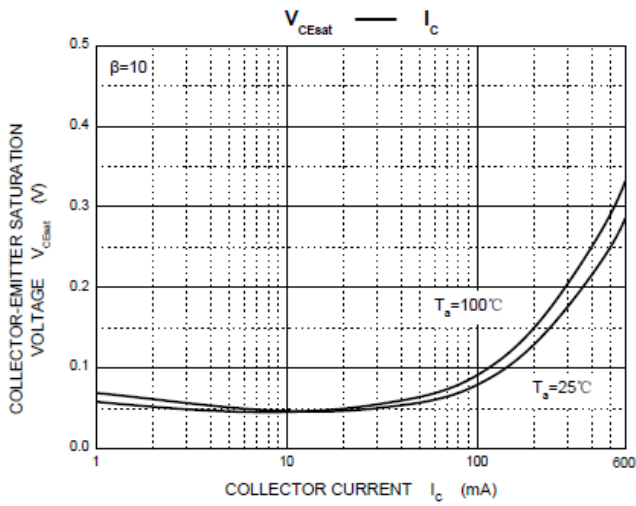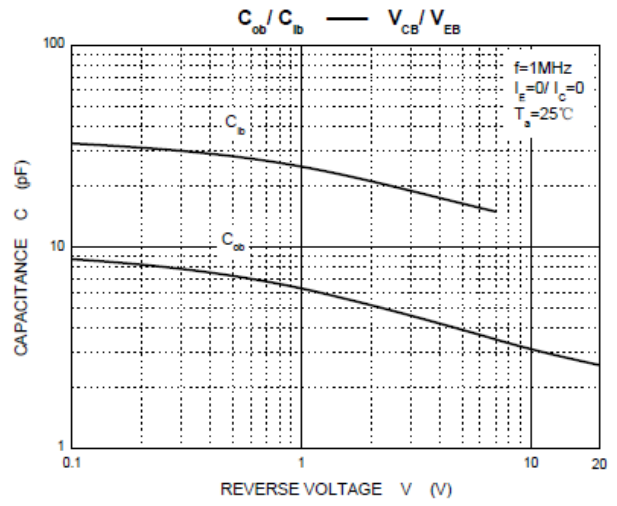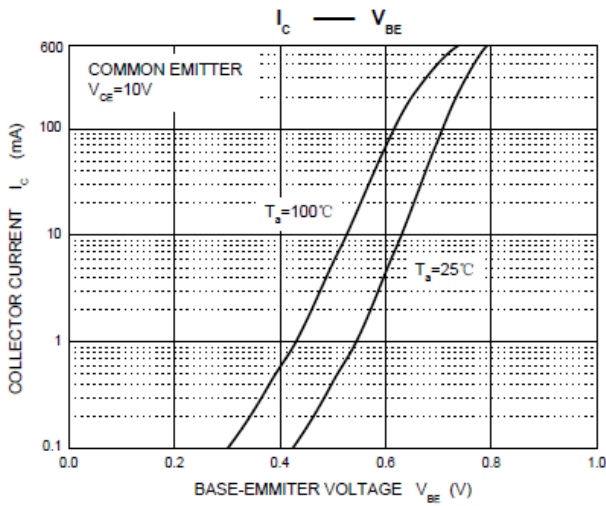




■ SOT-323 Package Outline Dimensions

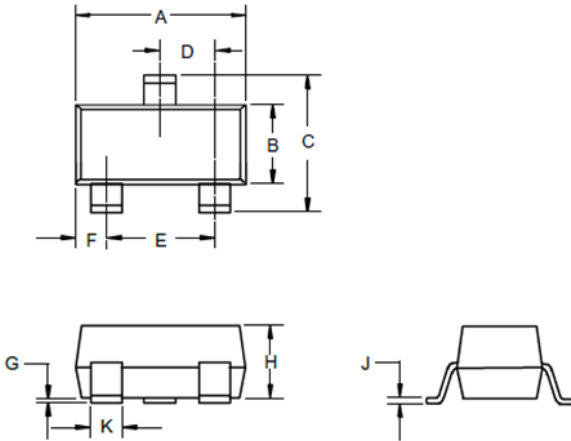

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

■ SOT-323 Suggested Pad Layout

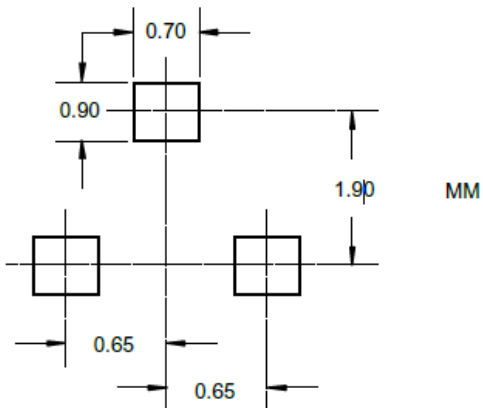



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.