


VTR-A-3386 Square Trimming Potentiometer

Square/ Single turn/ Cermet/ Industrial/ Sealed * Many Terminal Styles


Electrical Characteristics		Environmental Characteristics	
Standard Resistance Range	10ohms - 5Mohms	Power Rating (max 315V)	0.5W@70°C, 0W@125°C
Resistance Tolerance	±10%	Temperature Range	-55°C ~ +125°C
Absolute Min Resistance	≤1%R or 10n	Temperature Coefficient	250 or ±100ppm/°C
Contact Resistance Variation	CRV≤3%	Temperature Variation	-55°C, 30min, +125°C
Insulation Resistance	R1≥1GOhms(100Vac)		30min, 5 cycles
Withstand Voltage	220V	Collision	ΔR≤5%R, Δ(Uab/Uac)≤10%
Effective Travel	300°±10°		100m/s ² , 4000cycles,
Physical Characteristics		Electrical Endurance at 70°C	ΔR≤2%R
Starting Torque	≤35mN·m		0.5W@70°C, 1000h ΔR≤10%R
Marking	Model	Rotational Life	Δ(Uab/Uac)≤10%
	Resistance Code		CRV≤3% or 5ohms
Standard Packaging	50pcs, per tube		200 cycles
			ΔTR≤10%R
			CRV≤3% or 5 n




How To Order

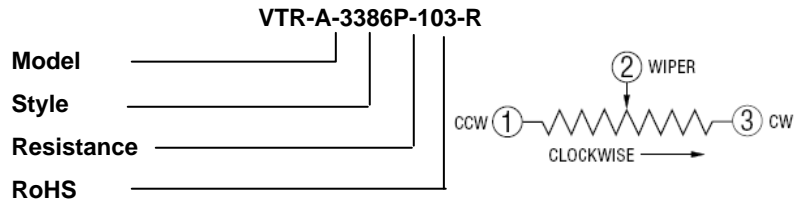


Side Adjust -Common Dimensions

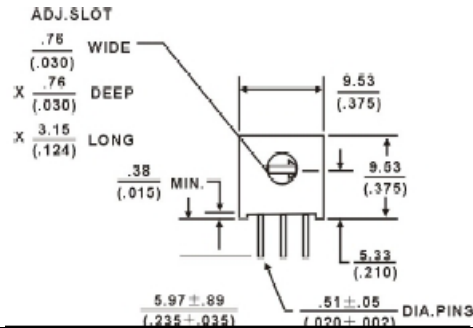


VTR-A-3386B




VTR-A-3386C

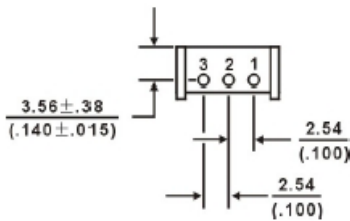


VTR-A-3386H

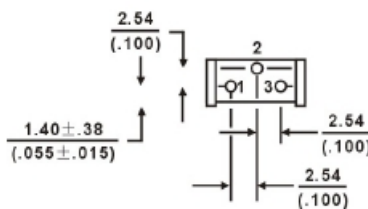


VTR-A-3386J




VTR-A-3386S



VTR-A-3386W





VTR-A-3386X

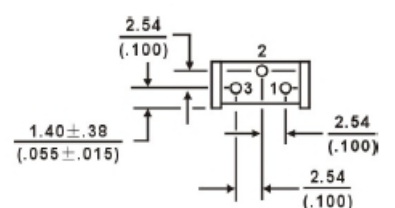

VTR-A-3386 Square Trimming Potentiometer

Square/ Single turn/ Cermet/ Industrial/ Sealed * Many Terminal Styles




Top Adjust -Common Dimensions

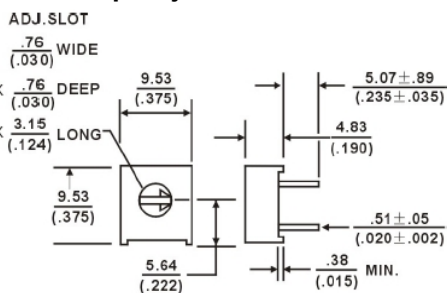

VTR-A-3386K

VTR-A-3386M




VTR-A-3386P



VTR-A-3386R

VTR-A-3386T




VTR-A-3386U

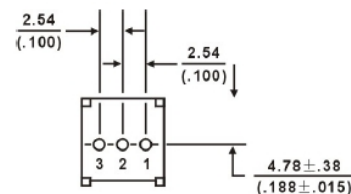

VTR-A-3386Y

VTR-A-3386G




VTR-A-3386V

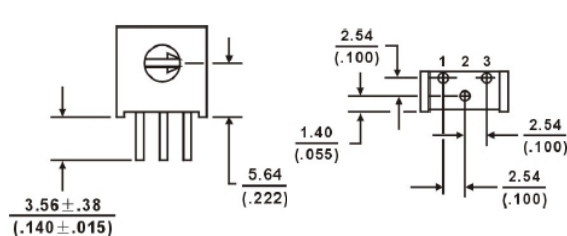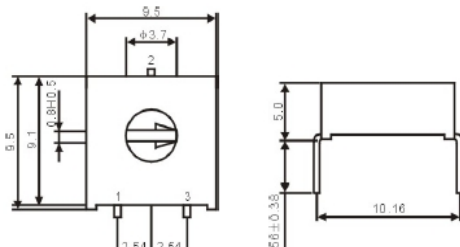

VTR-A-3386P-EY5

VTR-A-3386(P, B, C, H, J ...) -EY5-***

VTR-A-3386(P, B, C, H, J ...) -EY5-***L

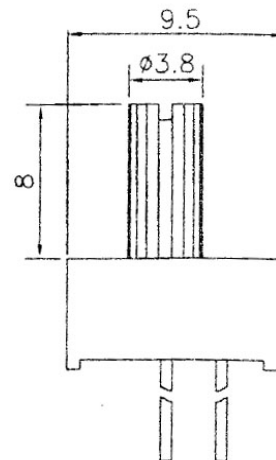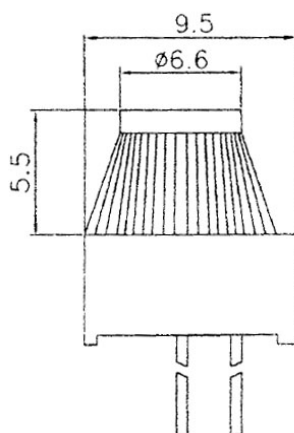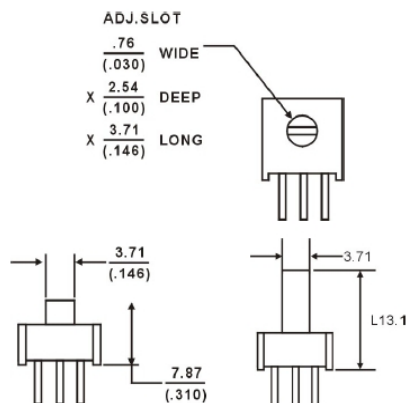

3386 is available with a knob for finger adjustment.

Add suffix letter "T" or "L" to order code.

Note: Specification are subject to change without notice. For more updated information, please visit our website.