

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 05/06/06'		

NOTES:

1.Materials

1.1. Insulator: thermoplastic

2.Specifications

2.1. Temperature range: $-20\sim+80^{\circ}\text{C}$.


2.2. Contact resistance: 100mΩ max.

2.3. Insulation resistance: 1000MΩ min.

2.4. Dielectric withstanding voltage: AC 500V
Per minute.

3.Product number code:

DS1136-13 - X X X X
Housing color
W: White
Contact plating
N: Full nickel
Connector type
S: Socket
No. of contacts:
2390: 2390 Positions
SERIES No.
DS1136-13

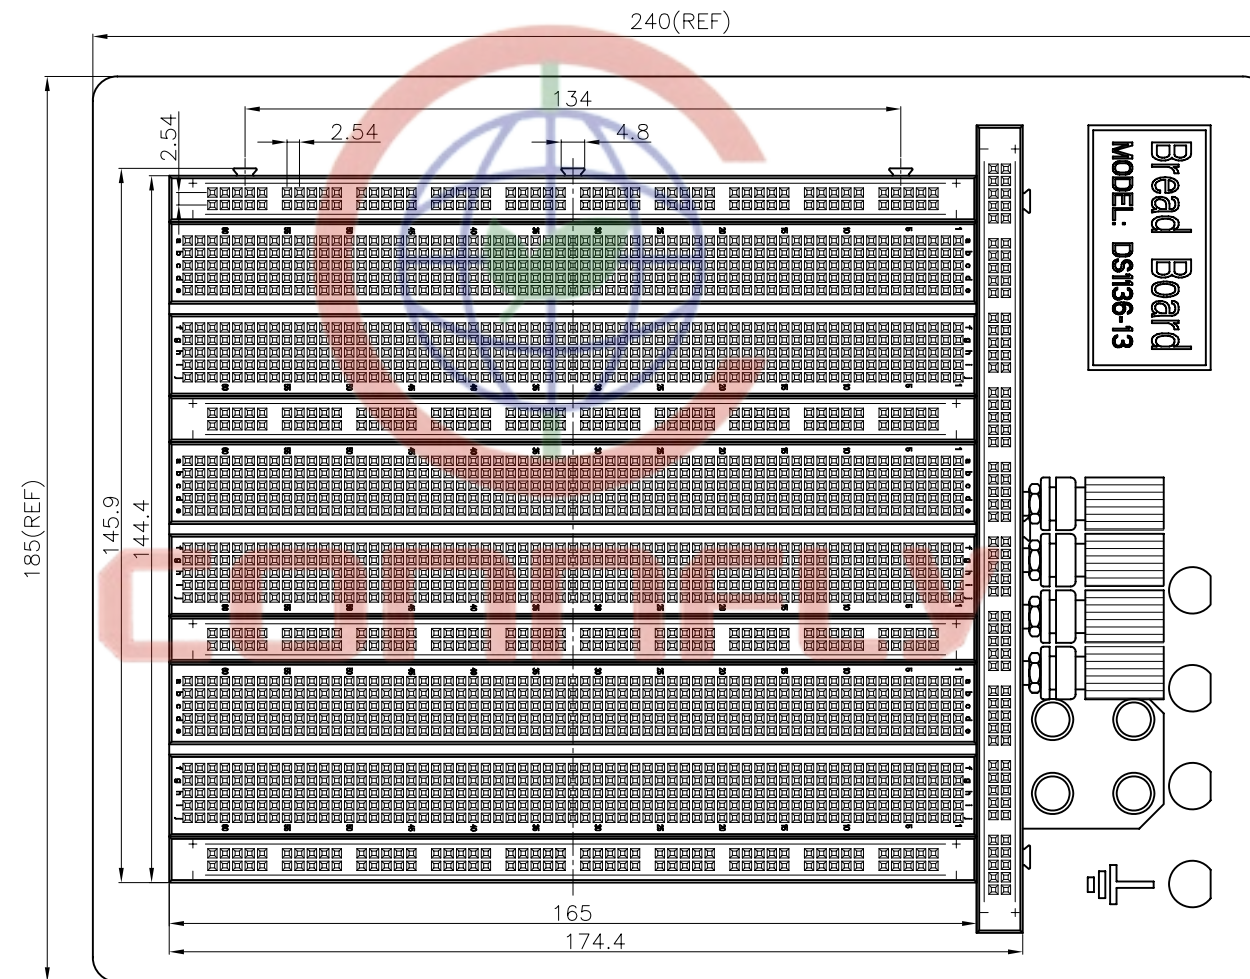

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X. ±0.60		X. ±5°		UNITS	mm	Bread Board pitch 2.54mm	
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1136-13 SERIES
.XX ±0.25		.XX ±2°		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1136-13-XXXX						



晨翔电子有限公司

CONNPLY CONNPLY ELECTRONIC CO. LTD